
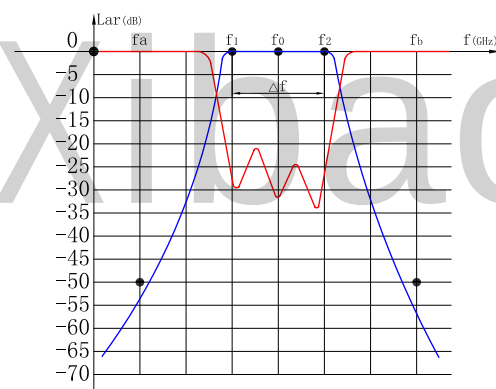


2. 波导带通滤波器 —— 阻带衰减 50dB (Band Pass Filter – Attenuation 50dB)

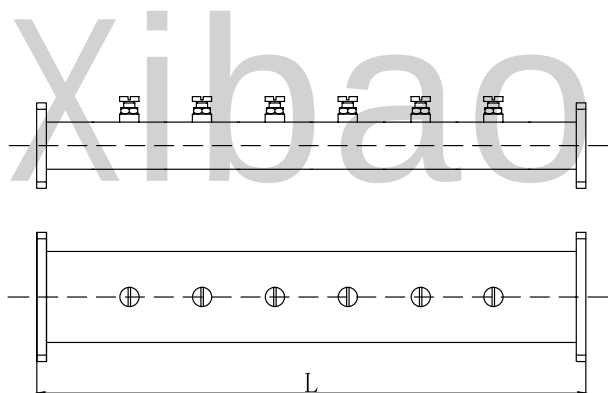

XB-BPF-50dB带通滤波器特性曲线图

型号 Model	频率范围 Frequency (GHz)	带宽 Bandwidth(%)	插损 IL (dB)	通带 VSWR	阻带衰减 Attenuation (≥ dB)	连接法兰 Flange	外形尺寸 Length (mm)
XB-WBPF650-50	1.14 ~ 1.79	1 ~ 10	≤ 0.2	≤ 1.20	50	FDP/FDM	950
XB-WBPF510-50	1.45 ~ 2.20	1 ~ 10	≤ 0.2	≤ 1.20	50	FDP/FDM	800
XB-WBPF430-50	1.72 ~ 2.61	1 ~ 10	≤ 0.2	≤ 1.20	50	FDP/FDM	700
XB-WBPF340-50	2.17 ~ 3.30	1 ~ 10	≤ 0.2	≤ 1.20	50	FDP/FDM	580
XB-WBPF284-50	2.60 ~ 3.95	1 ~ 10	≤ 0.2	≤ 1.20	50	FDP/FDM	460
XB-WBPF229-50	3.22 ~ 4.90	1 ~ 10	≤ 0.2	≤ 1.20	50	FDP/FDM	400
XB-WBPF187-50	3.94 ~ 5.99	1 ~ 10	≤ 0.2	≤ 1.20	50	FDP/FDM	320
XB-WBPF159-50	4.46 ~ 7.05	1 ~ 10	≤ 0.2	≤ 1.20	50	FDP/FDM	270
XB-WBPF137-50	5.38 ~ 8.17	1 ~ 10	≤ 0.2	≤ 1.20	50	FDP/FDM	220
XB-WBPF112-50	6.57 ~ 9.99	1 ~ 10	≤ 0.2	≤ 1.20	50	FBP/FBM/FBE	200
XB-WBPF90-50	8.20 ~ 12.5	1 ~ 10	≤ 0.3	≤ 1.20	50	FBP/FBM/FBE	170
XB-WBPF75-50	9.84 ~ 15.0	1 ~ 10	≤ 0.3	≤ 1.20	50	FBP/FBM/FBE	140
XB-WBPF62-50	11.9 ~ 18.0	1 ~ 10	≤ 0.35	≤ 1.20	50	FBP/FBM/FBE	120
XB-WBPF51-50	14.5 ~ 22.0	1 ~ 10	≤ 0.35	≤ 1.20	50	FBP/FBM/FBE	100
XB-WBPF42-50	18.0 ~ 26.5	1 ~ 10	≤ 0.4	≤ 1.20	50	FBP/FBM/FBE	85
XB-WBPF34-50	21.7 ~ 33.0	1 ~ 10	≤ 0.4	≤ 1.20	50	FBP/FBM/FBE	75
XB-WBPF28-50	26.5 ~ 40.0	1 ~ 10	≤ 0.4	≤ 1.20	50	FBP/FBM/FBE	65
XB-WBPF22-50	33.0 ~ 50.0	1 ~ 10	≤ 0.4	≤ 1.20	50	UG383/U	55
XB-WBPF19-50	39.2 ~ 59.6	1 ~ 10	≤ 0.4	≤ 1.20	50	UG383/U-Mod	50