



5300 Beethoven Street, Los Angeles, CA 90066  
 TEL: (310)306-5556 • FAX: (310)577-9887  
 WEB: [www.ophirrf.com](http://www.ophirrf.com) • E-MAIL: [sales@ophirrf.com](mailto:sales@ophirrf.com)

## Solid State Broadband High Power RF Amplifier

The 5303068A is a 50 Watt broadband amplifier that covers the 0.8 – 2.0 GHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3<sup>rd</sup> order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR<sub>RF</sub> amplifiers, the 5303068A comes with an extended multiyear warranty.

## MODEL 5303068A


0.8 - 2.0 GHz

50 WATTS

LINEAR POWER RF AMPLIFIER

	Parameter	Specification @ 25° C
<b>Electrical</b>		
1	Frequency Range	0.8 – 2.0 GHz
2	Saturated Output Power	50 Watts typical
3	Power Output @ 1dB Comp.	40 Watts min
4	Small Signal Gain	+8.0 dB min
5	Gain Flatness	± 1.5 dB max
6	IP <sub>3</sub>	+56 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical @ 40 Watts
9	Spurious Signals	< -60 dBc typical @ 40 Watts
10	Input/Output Impedance	50 Ohms nominal
11	DC Input Current	12 Amps max
12	DC Input	13 VDC nominal
13	RF Input	+37 - 41 dBm
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A/AB
<b>Mechanical</b>		
16	Dimensions	6.0" x 3.8" x 1.1"
17	Weight	2 Lbs.
18	Connectors	SMA female
19	Grounding	Chassis
20	Cooling	Adequate Heatsink Required
<b>Environmental</b>		
21	Baseplate Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice.

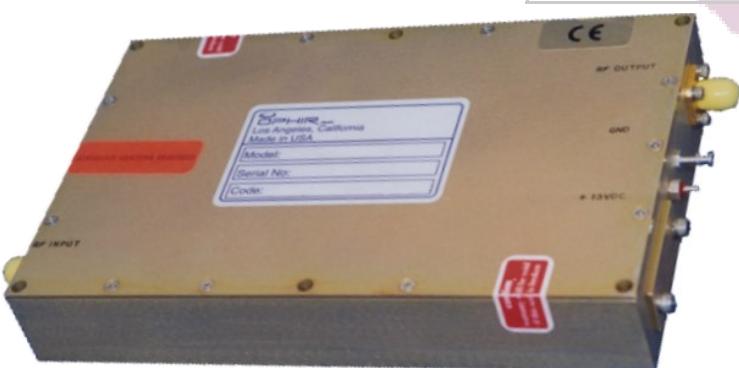

**Note: 5303012A is the recommended driver for this module.**