

# DC-2GHz SSS High Pass Filter



#### **Features**

- SSS Filter Suspended Substrate Stripline Filter
- Flat frequency response and low insertion loss
- Covers the DC to 18GHz Frequency Range
- Wide bandwidth and 3 dB BW Available from 5-50% (fo)
- Designs that Cover up to 40 GHz Also Available
- MIL-E-5400 standard

## Electrical Specifications, TA = +25 $^{\circ}$ C, 50 Ohm System,

| Parameters               |           | Min.       | Тур. | Max. | Units |
|--------------------------|-----------|------------|------|------|-------|
| Frequency Range          |           | DC         |      | 2    | GHz   |
| Insertion Loss           |           |            | 0.9  | 1.0  | dB    |
| Pass Band Ripple         |           |            | 0.9  | 1.0  | dB    |
| VSWR                     |           |            | 1.4  | 1.5  |       |
| Rejection                | @2.3-6GHz | 50         | 55   |      | dB    |
| Power Rating             | Average   |            |      | 15   | w     |
|                          | Perk      |            |      | 0.1  | KW    |
| Operating Temperature    |           | -55        |      | +85  | °C    |
| Impedance                |           | 50         |      |      | Ohms  |
| Weight                   |           | 100        |      |      | g     |
| Input / Output Connector |           | SMA-Female |      |      |       |
| Material                 |           | Aluminum   |      |      |       |
| Finishing                |           | Gray Paint |      |      |       |




### **Environment specifications**

|                  | 1   |  |
|------------------|---|--|
| Operational      |   |  |
| Temperature (C°) | -55 ~ +85   |  |
| Storage          |   |  |
| Temperature (C°) | -55 ~ +125  |  |
|                  | 30,000 ft. (Epoxy Seal Controlled environment)  |  |
| Altitude         | 60,000 ft 1.0psi min<br>(Hermetically Seal Un-controlled<br>environment) ( Optional ) |  |
| Vibration        | 25g rms (15 degree 2KHz)<br>endurance, 1 hour per axis                                |  |
| Humidity         | 100% RH at 35c, 95%RH at 40 deg c   |  |
| Shock            | 20G for 11msc half sin wave,3 axi<br>both directions                                  |  |


#### performance plots

#### Loss VS. Ripple VS. Rejection VS.VSWR

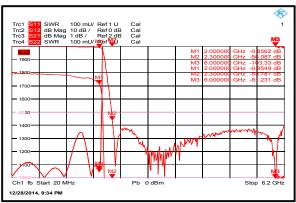

## **Outline Drawing:**

All Dimensions in mm (inches) Tolerance  $\pm$  0.2 (0.008)

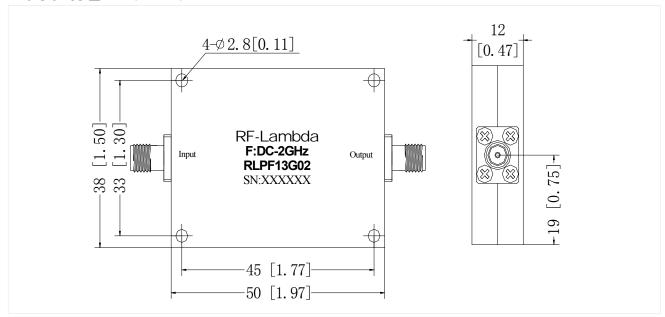

#### **Important Notice**

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.