



RF-LAMBDA

The power beyond expectations

RFPSHT3237D5

Digital 360° Phase Shifter 32-37GHz



Features

- Wide Band Operation 32-37GHz
- 5-Bit Phase Shift
- Temperature Range -45°C~+85°C
- Customization available upon request
- Hermetically sealed package up to 60,000ft available upon request.

Electrical Specifications, TA = +25° C, With Vdd = +5V, VCTL = 0/ -5V

Description	PN:RFPSHT3237D5						
	Digital Phase Shifter						
Parameters	Min	Typ.	Max	Min	Typ.	Max	Units
Frequency Range	32		37				GHz
Phase Range		360					°
Insertion Loss		9.0	11				dB
Insertion Loss Temperature Coefficient		0.008					dB/°C
Phase Flatness		±3	±5				°
Input VSWR		1.5	2.0				
Output VSWR		1.5	2.0				
Input Power for 1 dB Compression		-					dBm
IP3		-					dBc
Switching Speed		-					ns
Weight	40						g
Impedance	50						Ω
Biasing (+5V)	1						mA
Input /Output Connector	2.92mm-F (Standard)						
Control PIN	-						
Finishing	Gold Plating						
Material	Brass						
Seal	Hermetically Sealed (optional)						

Digital Control Phase Shifter 32-37GHz



RF-LAMBDA

The power beyond expectations

RFPSHT3237D5

Absolute Maximum Ratings

Biasing	+5V/1mA
TTL Control Voltage	-5V/0V
RF Input power	+20dBm
Operating Temperature(C°)	-45 ~ +85
Storage Temperature(C°)	-50 ~ +125

Ordering Information


Part No	ECCN	Description
RFPSHT3237D5	EAR99	32-37GHz Digital Phase Shifter

Environment specifications


Operational Temperature (C°)	-45 ~ +85
Storage Temperature (C°)	-50 ~ +125
Altitude	30,000 ft. (Epoxy Seal Controlled environment) 60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) (Optional)
Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40 deg c
Shock	20G for 11msc half sin wave,3 axis both directions

performance plots


Insertion Loss

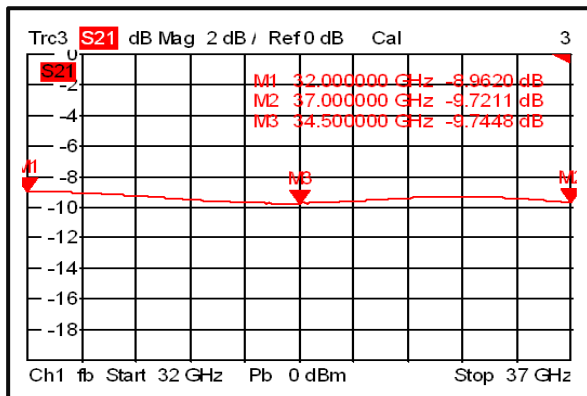


Input VSWR

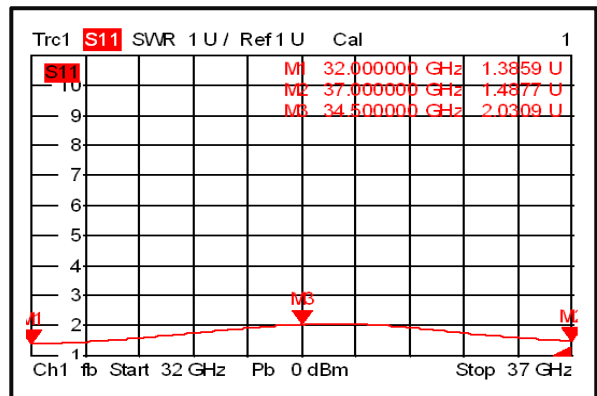

Output VSWR

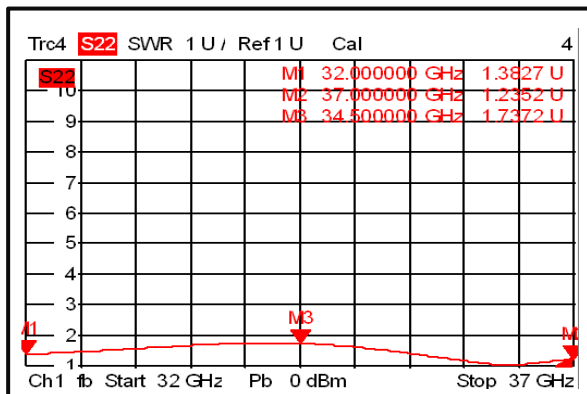

Insertion Loss vs. Frequency

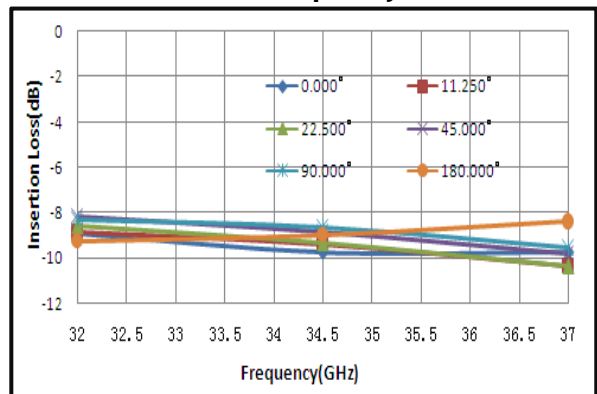




RF-LAMBDA


The power beyond expectations

RFPSHT3237D5


Input VSWR vs. Frequency

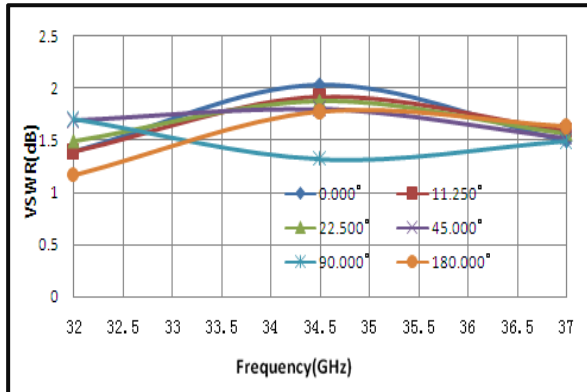


Output VSWR vs. Frequency

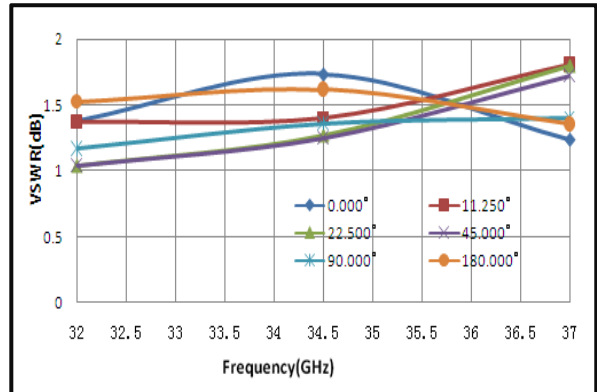


Normalized Loss . All States

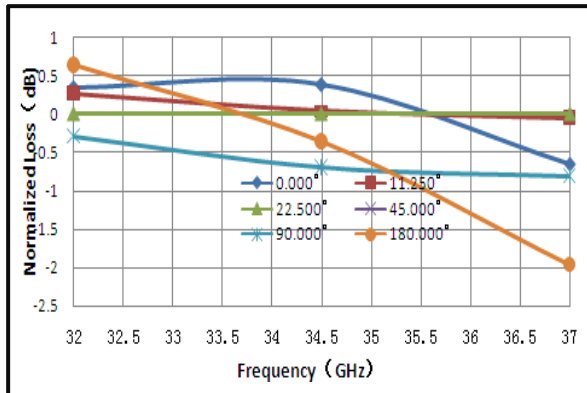


Relative Phase Shift vs. Frequency

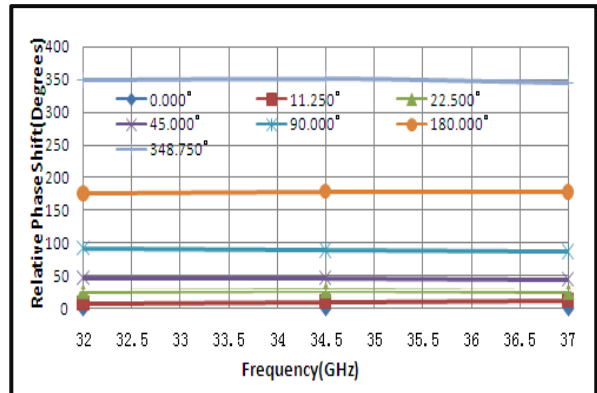

Phase Error vs. Frequency

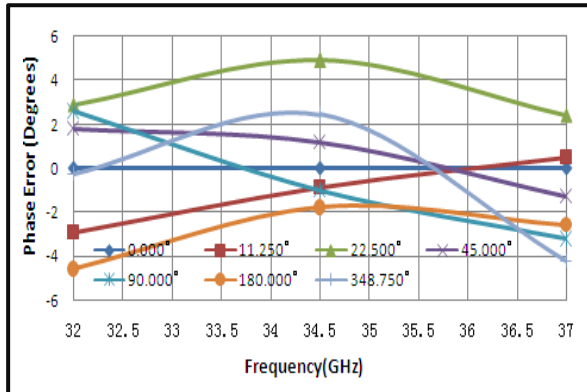

Phase Error vs. State



P1dB vs. Frequency



Output Third Order Intercept (IP3)



Digital Control Phase Shifter 32-37GHz



RF-LAMBDA

The power beyond expectations

RFPSHT3237D5

The datasheet for test 1dB




speed



Outline Drawing:

All Dimensions in mm (inches)

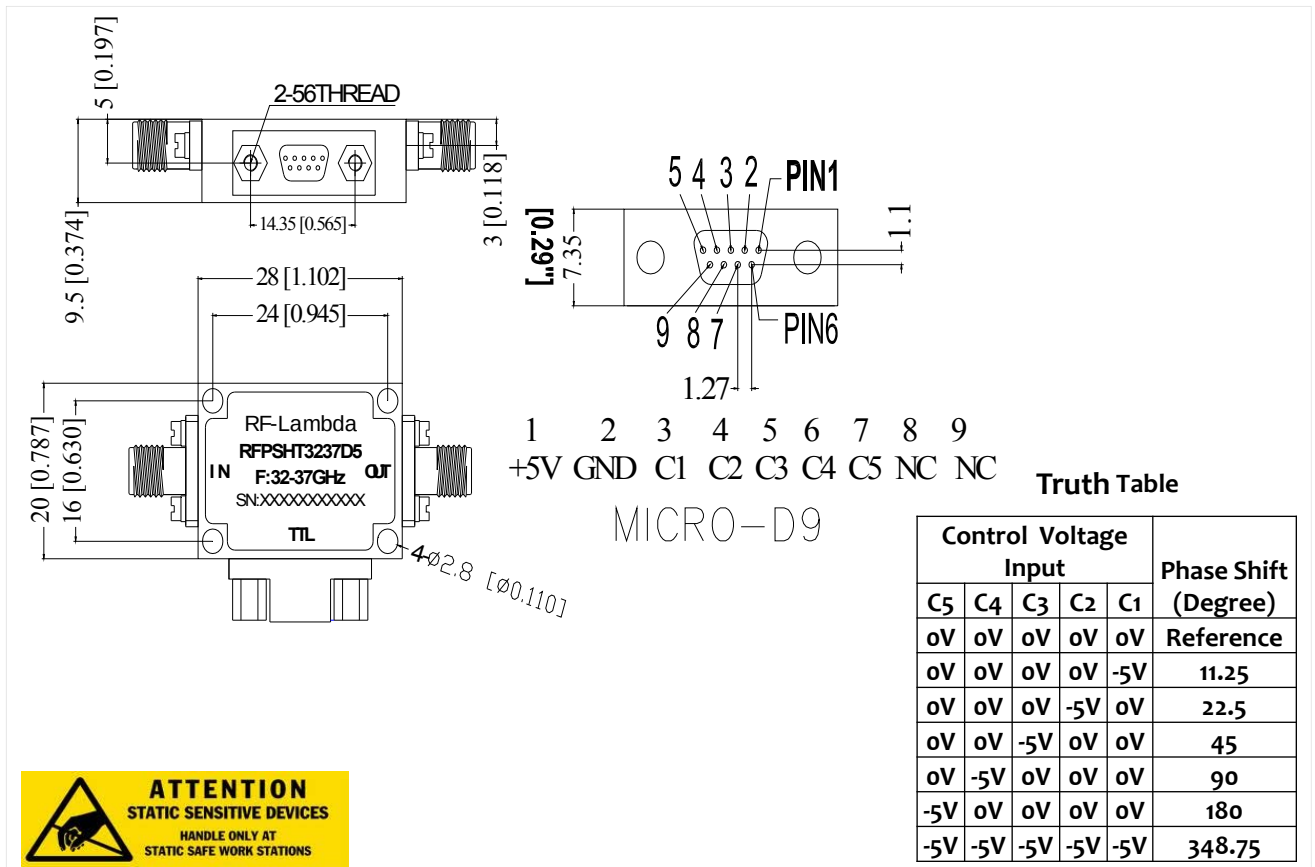

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Digital Control Phase Shifter 32-37GHz