

BNC

SERIES BNC RF.COAXIAL CONNECTORS





Series BNC RF.Coaxial connectors.Which have the bayonet structure coupling mating and developed according to MIL-C-39012/16-24 , They can be interchangeable with the same-type connectors of abroad,engaged and disengaged rapidly , used to connect coaxial cables in radio equipment and instruments. They accord with the GB11315 specifications.

BNC

SERIES BNC RF.COAXIAL CONNECTORS


KEY PERFORMANCE				
Temperature range		-55~+165℃	Insulation resistance	≥5000M Ω
Characteristic Impedance		50 Ω	DielectricWithstanding Voltage	1500V(rms)
Frequency range		0 ~4GHz	VSWR	≤1.30
Voltage rating		500V(rms)	Disengage force	≥0.6N
Contact resistance	Center conductor	≤0.002 Ω	Durability	500 Cycles
	Outer conductor	≤0.0002 Ω		

INTERFACE MATING DIMENSIONS

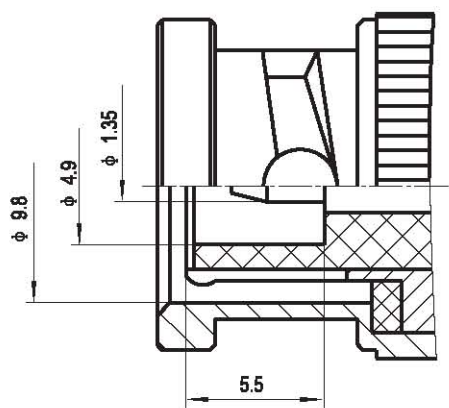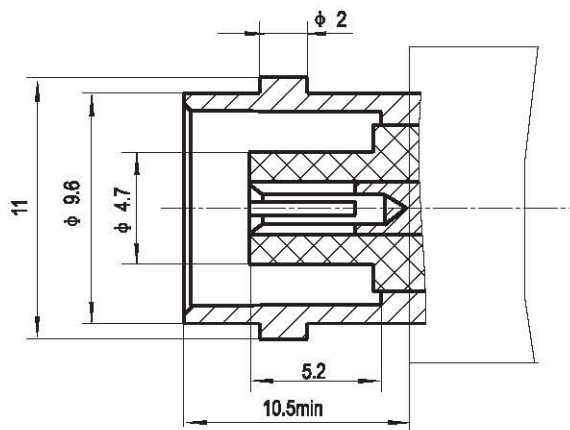




BNC-J3 等

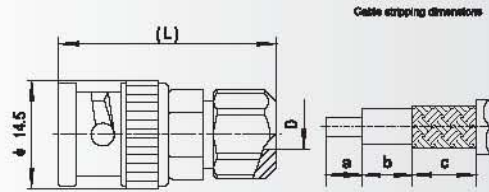

Type	D	L	a	b	c	Cable type
BNC-J3	φ 3.1	31.1	5.5	0.7	7	SFF-50-1.5-1 SYV-50-2-1
BNC-J4	φ 4.2	31.1	5.5	0.7	7	SFF-50-2-2 SYV-50-2-2
BNC-J5	φ 5.2	31.1	5.5	0.7	7	SYV-50-3
BNC-J12	φ 5.2	36	7	1	8	SYV-75-3
BNC-J13	φ 7.4	36	7	1	8	SYV-75-5-1 SYV-75-5-2




BNC-J21



Type	Cable type
BNC-J21	SDY-4




BNC-JW3 等

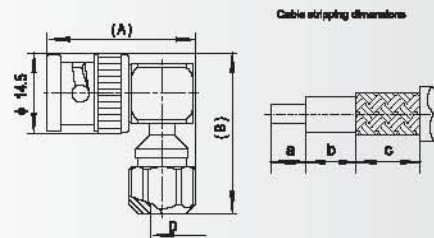


Type	D	A	B	a	b	c	Cable type
BNC-JW3	φ 3.1	28	27.4	3.4	8.4	2	SFF-50-1.5-1 SYV-50-2-1
BNC-JW4	φ 4.2	28	27.4	3.4	8.4	2	SFF-50-2-2 SYV-50-2-2
BNC-JW5	φ 5.2	28	27.4	3.4	8.4	2	SYV-50-3
BNC-JW12	φ 5.2	28	36	3.4	8.4	2	SYV-75-3



BNC-J2Y 等

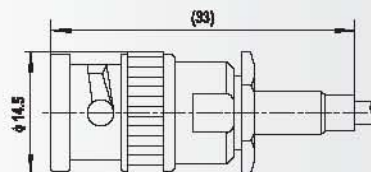


Cable stripping dimensions




Type	a	b	c	Cable type
BNC-J2Y	2.5	10.5	3.5	SFF-50-1 SYV-50-1
BNC-J3Y	2.5	10.5	3.5	SFF-50-1.5-1 SYV-50-2-1



BNC-J4Y 等

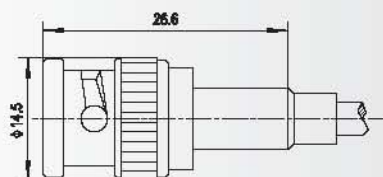


Cable stripping dimensions




Type	a	b	c	Cable type
BNC-J4Y	3.8	4	9.5	SFF-50-2-2 SYV-50-2-2
BNC-J5Y	3.8	4	9.5	SYV-50-3



BNC-JW3Y




Cable stripping dimensions




Type	a	b	c	Cable type
BNC-JW3Y	3.4	2.9	9.5	SFF-50-1.5-1, SYV-50-2-1



BNC-JW4Y 等




Cable stripping dimensions




Type	a	b	c	Cable type
BNC-JW4Y	3.4	2.9	9.5	SFF-50-2-2, SYV-50-2-2
BNC-JW5Y	3.4	2.9	9.5	SYV-50-3



BNC-J8

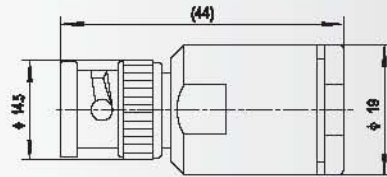


Cable stripping dimensions




Type	a	b	c	Cable type
BNC-J8	3.5	0	12	SYV-60-7-2




BNC-50JY

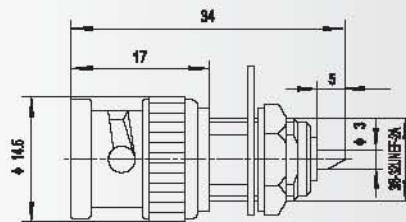


Mounting hole




BNC-75J3YA

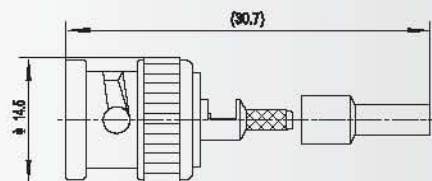


Cable stripping dimensions




Type	a	b	c	Cable type
BNC-75J3YA	2.3	2.2	5.4	SFYZ-75-2-1

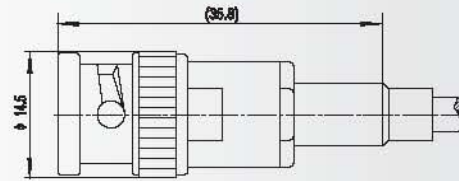



Cable stripping dimensions





Type	a	b	c	Cable type
BNC-J12Y	7.3	11.1	10	SYV-75-3

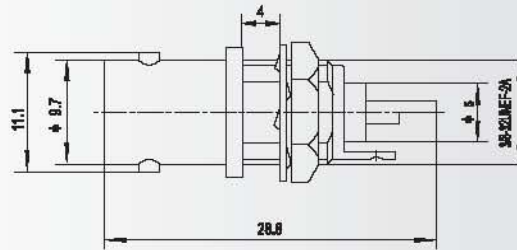



Mounting hole

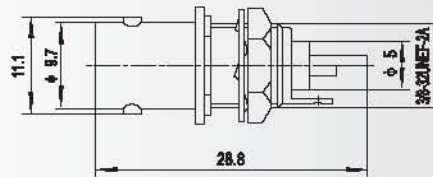


Mounting hole

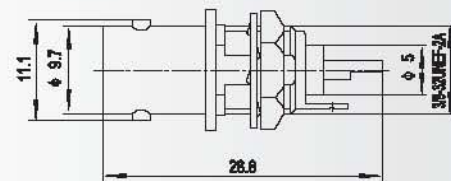

Mounting hole

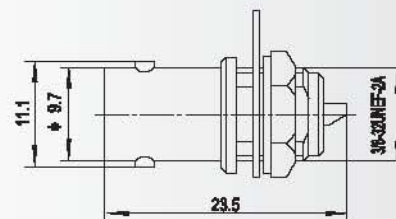


Mounting hole







BNC-50KY-3

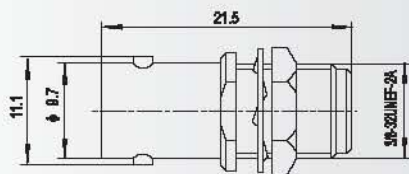


Mounting hole




BNC-50KY-4

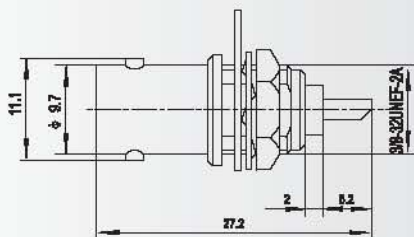


Mounting hole




BNC-50KY-5

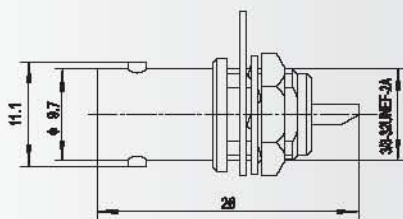


Mounting hole




BNC-50KY-6

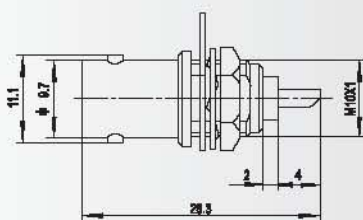


Mounting hole



BNC-75KY

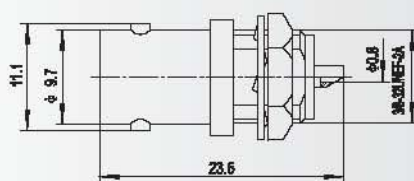


Mounting hole







BNC(M)-KY

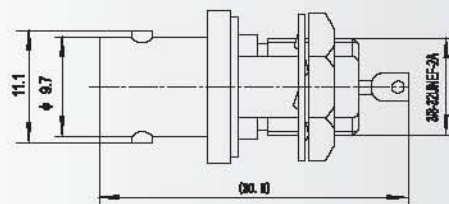


Mounting hole




BNC(M)-KY-1

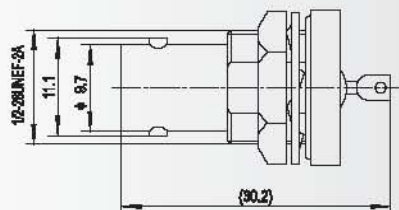


Mounting hole




BNC(M)-KY-2

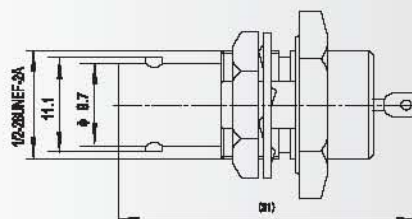


Mounting hole




BNC-KY2

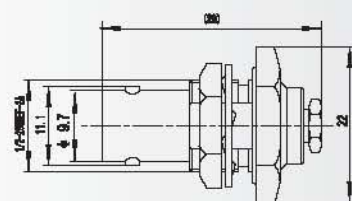

Mounting hole




Cable stripping dimensions




Type	a	b	c	Cable type
BNC-KY2	2.5	10.5	5.3	8FF-50-1, SYV-50-1




BNC-KY3

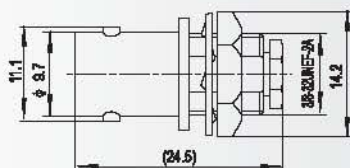

Mounting hole




Cable stripping dimensions




Type	a	b	c	Cable type
BNC-KY3	2.4	3.8	0.8	8FF-60-1.6-1, SYV-50-2-1



BNC-KY4 等

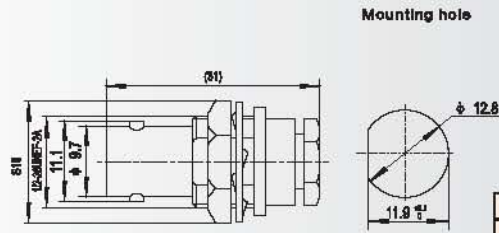


Cable stripping dimensions



Type	a	b	c	Cable type
BNC-KY4	6.5	1	6.3	8FF-50-2-2, SYV-50-2-2
BNC-KY5	6.5	1	6.3	SYV-50-3




BNC-KY21

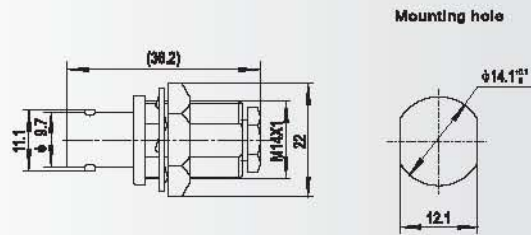


Type	Cable type
BNC-KY21	SDY-4



BNC(S)-KY3

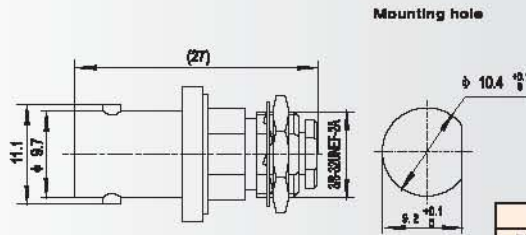


Cable stripping dimensions



Type	a	b	c	Cable type
BNC(S)-KY3	4.2	0	8	SFF-50-1.5-1, SYV-50-2-1



BNC-KY2Y 等

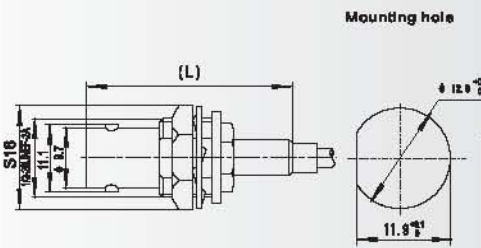


Cable stripping dimensions




Type	L1	a	b	c	Cable type
BNC-KY2Y	30	2.4	11	5.8	8FF-50-1, SYV-50-1
BNC-KY3Y	30	2.4	11	5.6	8FF-50-1.5-1, SYV-50-2-1
BNC-KY4Y	35.5	5.5	5	4.5	SFF-50-2-2, SYV-50-2-2
BNC-KY5Y	35.5	5.5	6	4.5	SYV-50-3



BNC-75KHD2

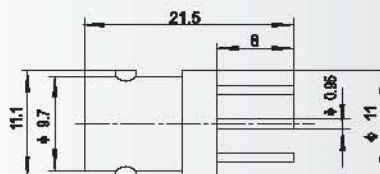


Mounting hole







BNC-KF3

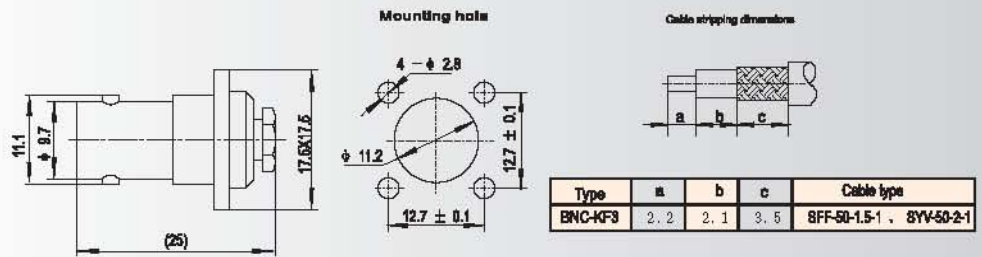


BNC-KF4 等

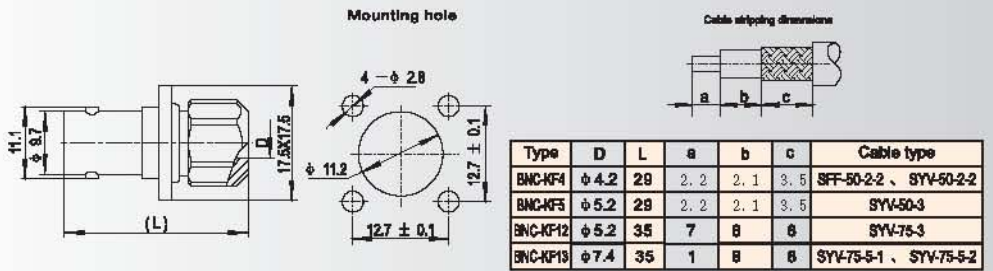


BNC-KF21

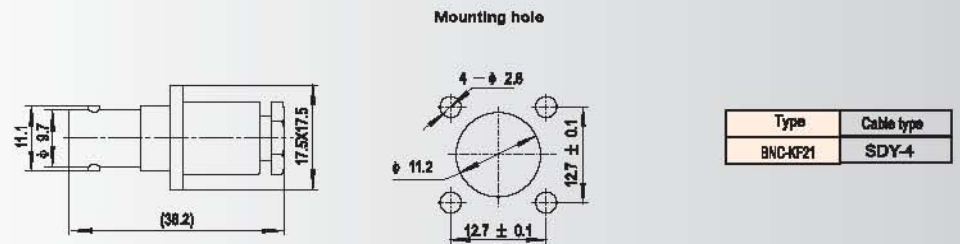


BNC-50KFD

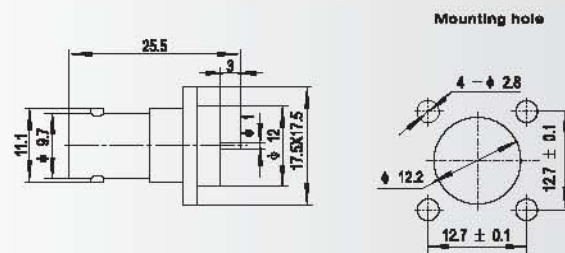


BNC-50KF 等

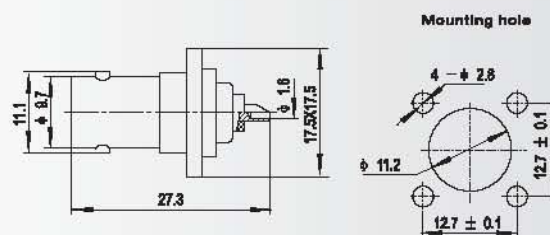






BNC J5Y 3

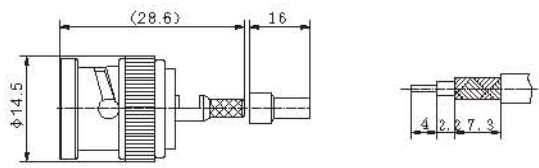


Cable type: SFF 50 1.5 1、SYV 50 2 1

BNC 75JY

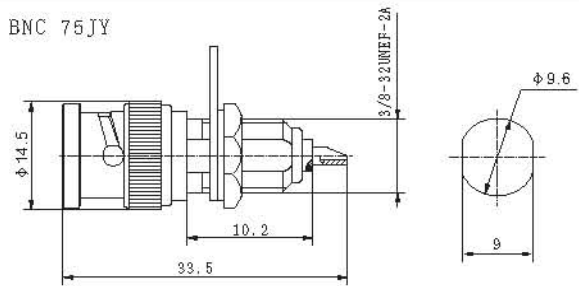


BNC JB3

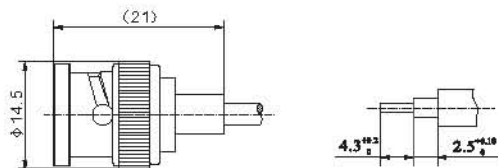


Cable type: SFT 50 3 1


BNC 75KFD

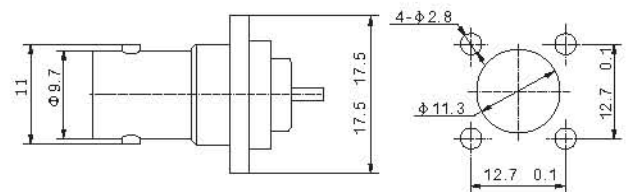


BNC 50JF

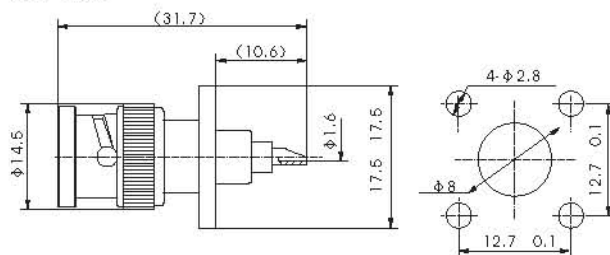


BNC (S) -KY2-1

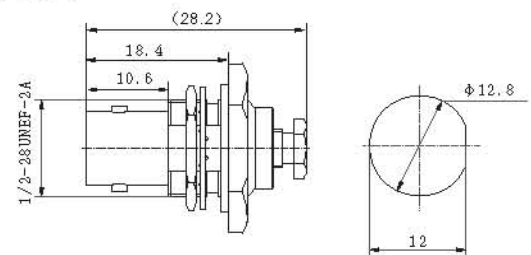


BNC JFD

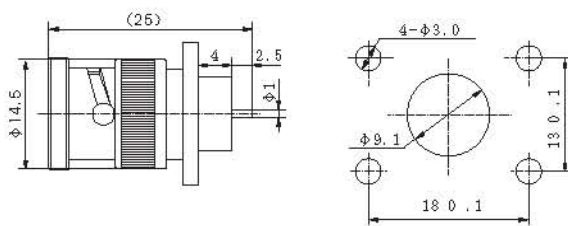

BNC (S) -KY2A

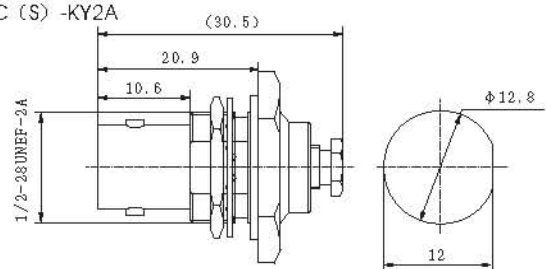


BNC J4A

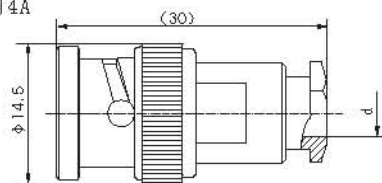


Type	d
BNC J4A	φ4.5
BNC J5A	φ5.5

BNC KYA 2

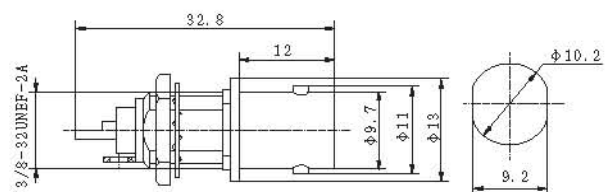





BNC KFD2

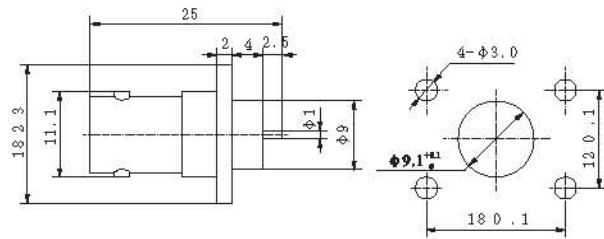


BNC (S) -KY

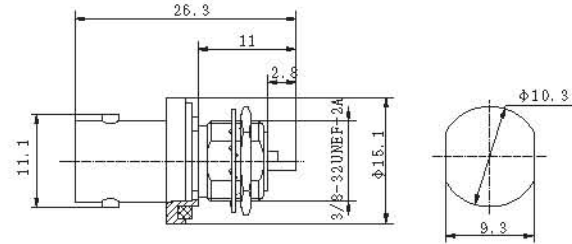


BNC (S) -KY2-2

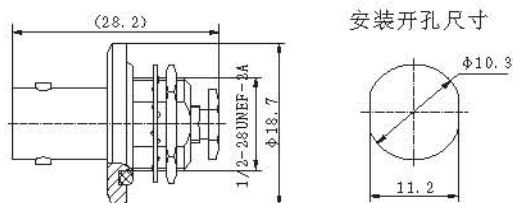


BNC KWFD1

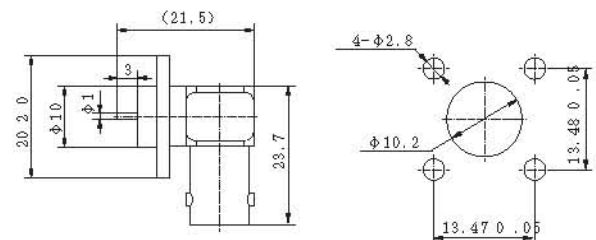


BNC KY12

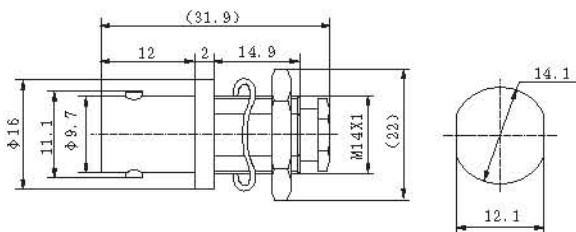


BNC 50KYF

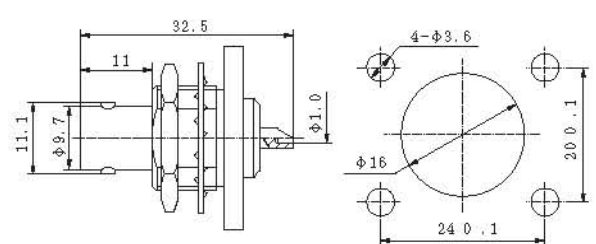


BNC KY3A

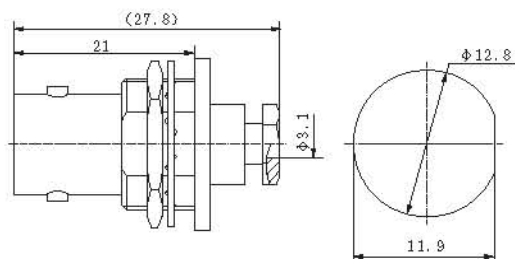


BNC 50KF 2

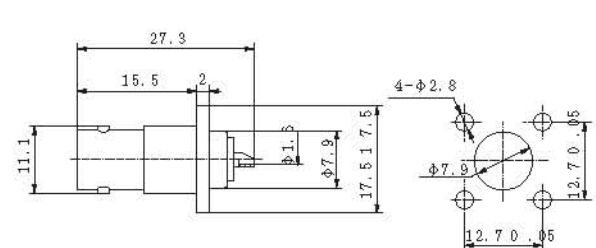

BNC KY13

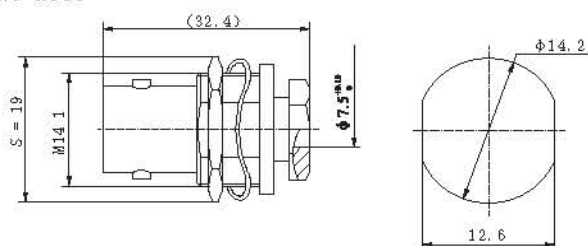


BNC 50KKF

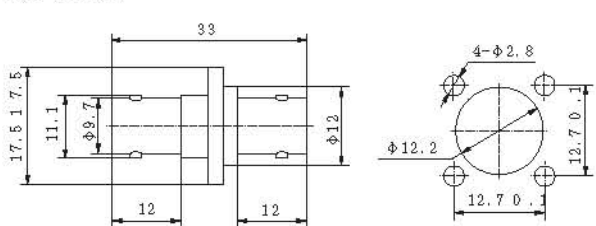





BNC KHD

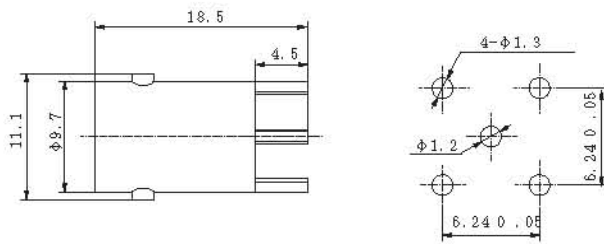


BNC KYHD

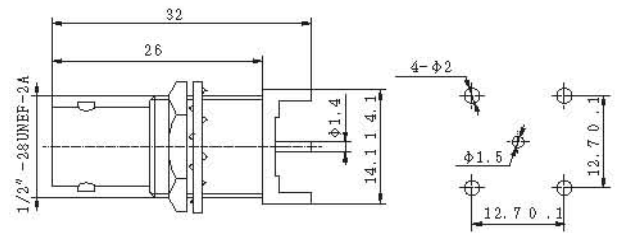


BNC KHD1

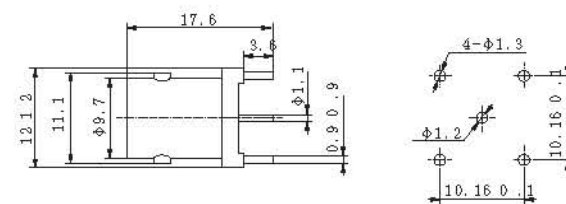


BNC (M) KF

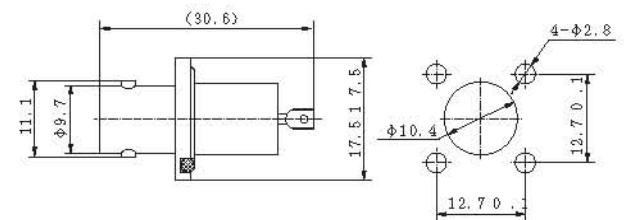


BNC 50KHD2

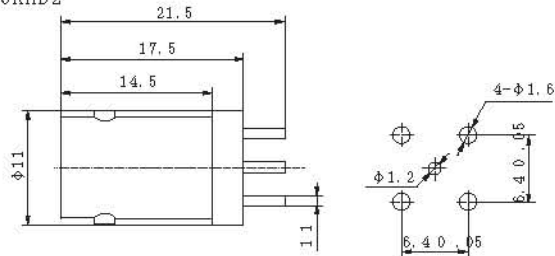


BNC (S) -KF3

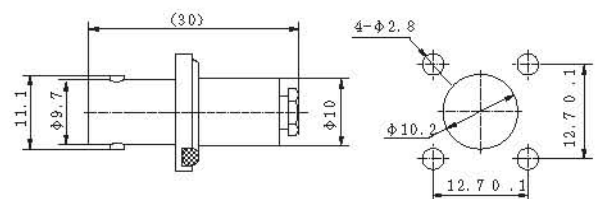


BNC KHD3

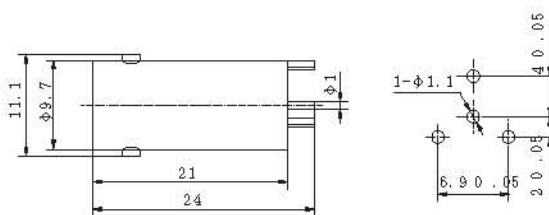


BNC (M) KY2

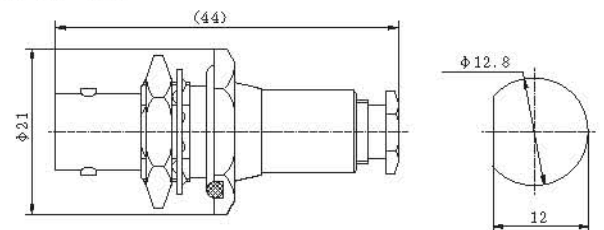

BNC KWHD

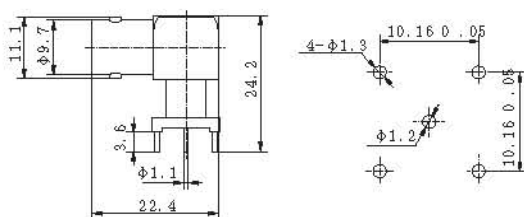


BNC (S) KY2

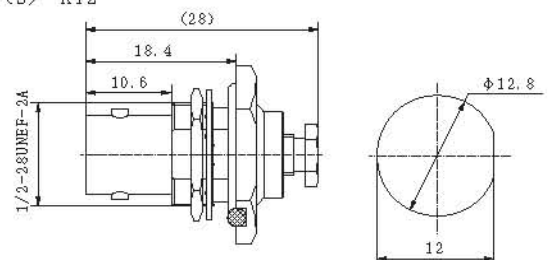





BNC (S) -KY2A-1

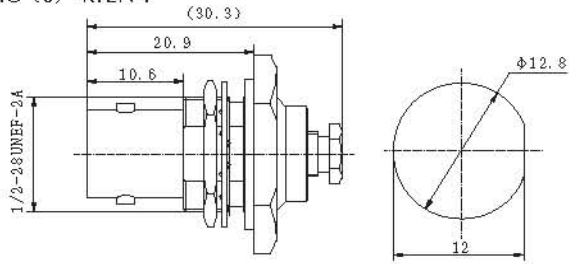


BNC 50KK

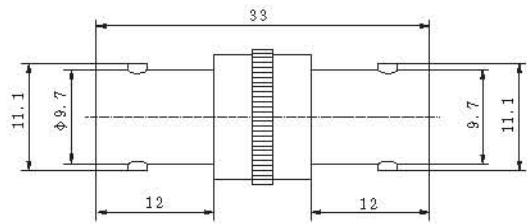


BNC (S) -KY4

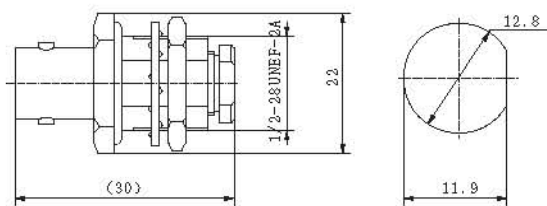


BNC 50KKK

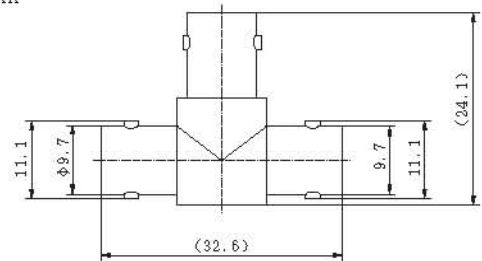


BNC 75KF2

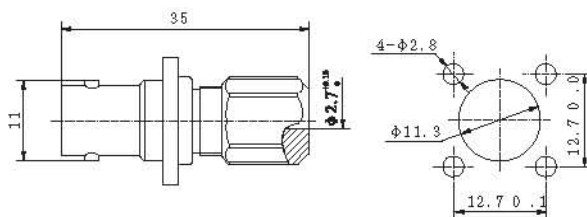


BNC (M) -50KKY

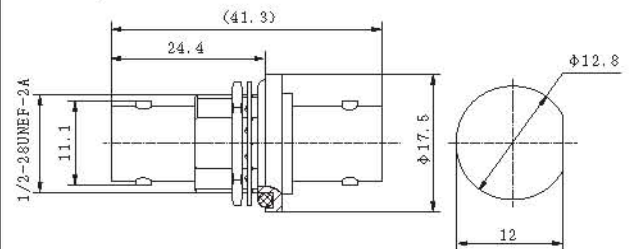


BNC (S) -50KKF

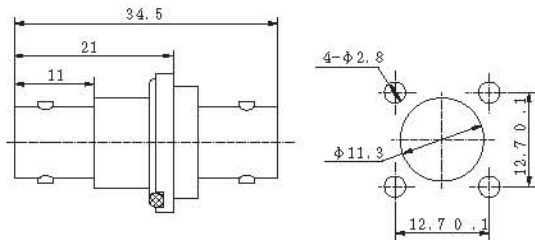


BNC 50KKY1

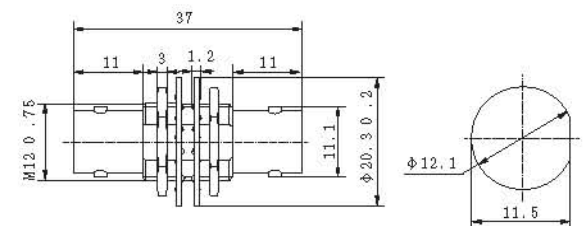

BNC (S) -50KKY

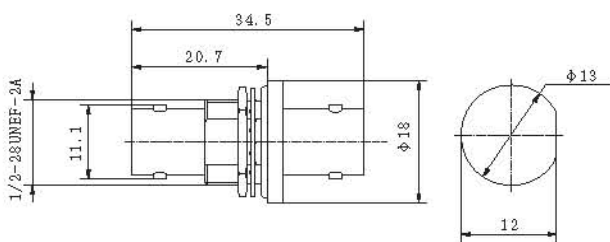


BNC 50KKY

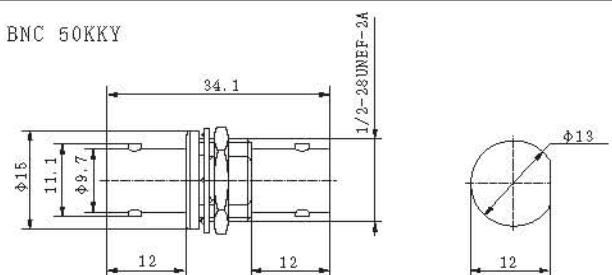





BNC 75KKY1

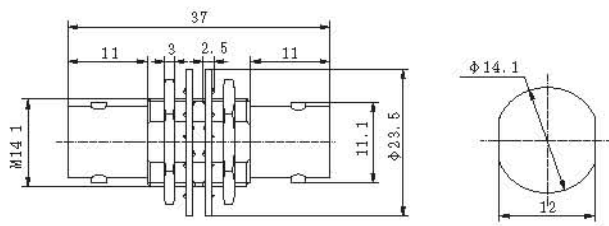


BNC 75KKY

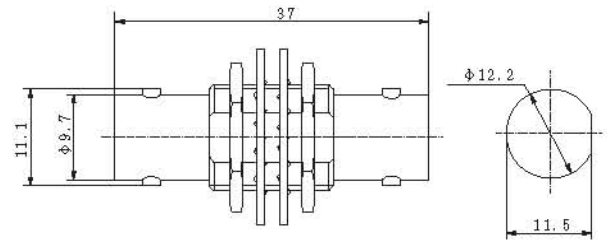

BNC 75KKF

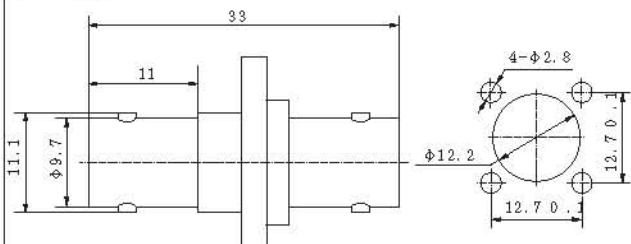

BNC 75KK2

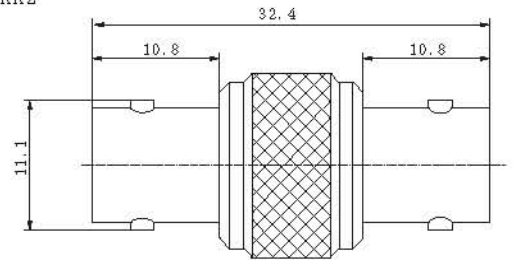

BNC 50JJ

