
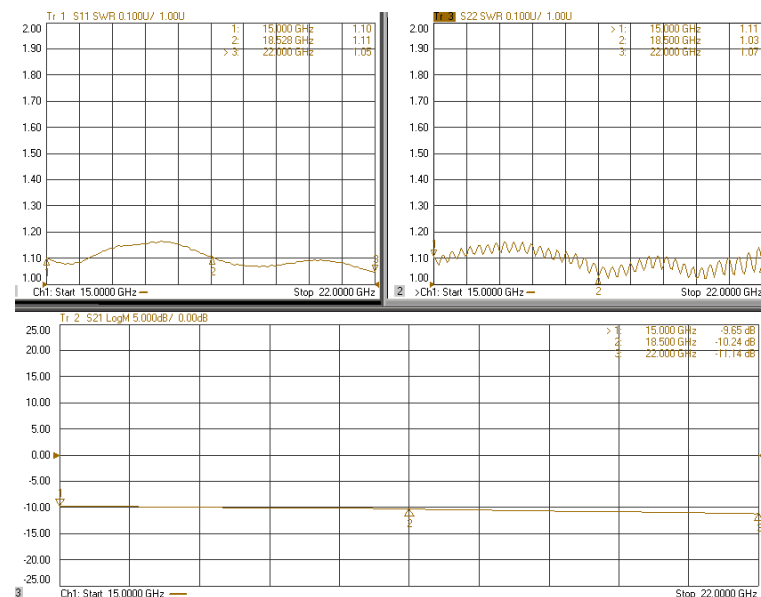


WAVEGUIDE WR51 50W ATTENUATOR – RFWAT51W050

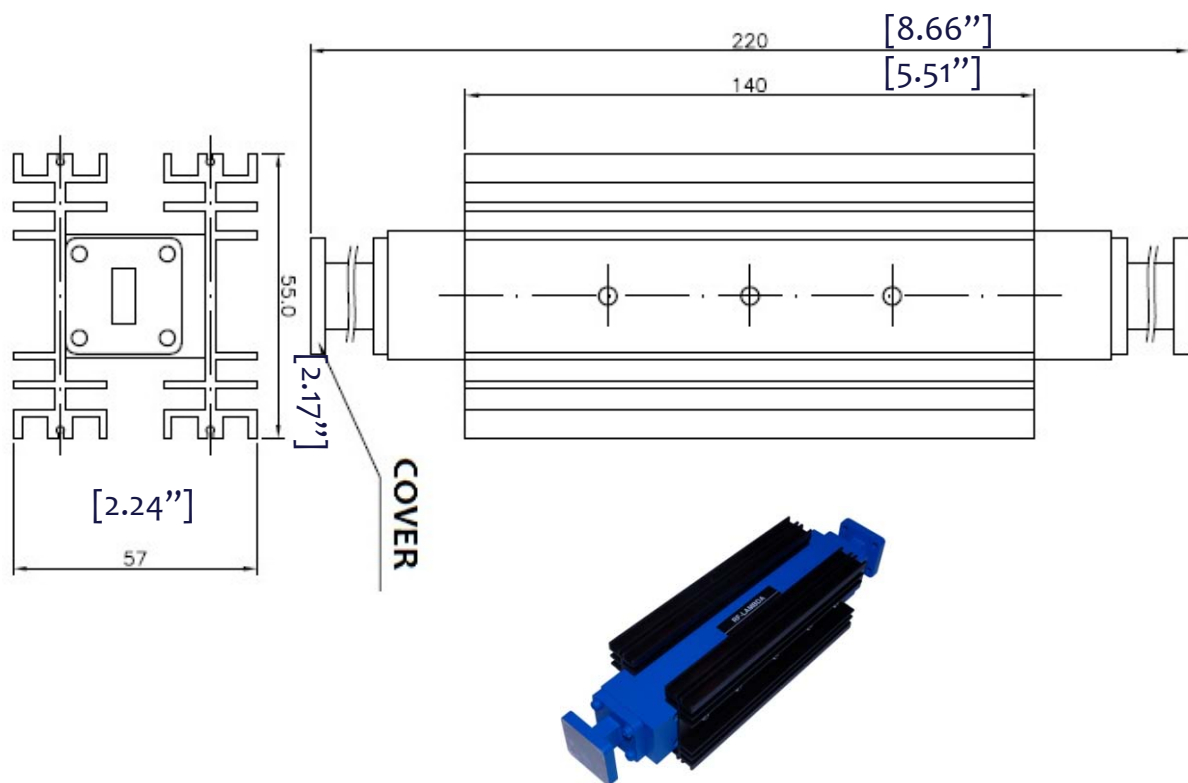

1.0	Mechanical Specifications	
1.1	Waveguide type	Rectangular Waveguide WR51
1.2	Flange type	CPRG, CPRF, COVER, CHOKE
1.3	Flange Holes	Through
1.4	Basis-material	Alloyed Cuprum 0.1kg
1.5	Internal Body Finish	Silver Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-60°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35C, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

3.0	Electrical Specifications	
3.1	Frequency Range	15-22GHz
3.2	Forward Power	50W (CW)
3.3	Peak Power	1KW (8us pulse)
3.4	Attenuation	3dB~50dB
3.5	VSWR	1.20:1 (type.)

PAGE 1 OF 1		DATE Sep 20 th 2005
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.		DESIGN RFPC
		RF-LAMBDA RFPC
 RFWAT51W050W AVEGUIDE ATTENUATOR		CAD MODEL REVISION 11
		ASSEMBLY REVISION VS5DS
www.rflambda.com RF-LAMBDA		ASSEMBLY NAME RFLVR05
		DRAWING NUMBER D05-1
SIZE LT	SHEETS 1	OF 1