

# LMX2485Q-Q1 500 MHz - 3.1 GHz High Performance Delta-Sigma Low Power Dual PLLatinum™ Frequency Synthesizers With 800-MHz Integer PLL

## 1 Features

- Quadruple Modulus Prescaler for Lower Divides
  - RF PLL: 8/9/12/13 or 16/17/20/21
  - IF PLL: 8/9 or 16/17
- Advanced Delta Sigma Fractional Compensation
  - 12-Bit or 22-Bit Selectable Fractional Modulus
  - Up to 4th Order Programmable Delta-Sigma Modulator
- Improved Lock Times and Programming
  - Fastlock / Cycle Slip Reduction Requiring Only a Single-Word Write
  - Integrated Time-Out Counter
- Wide Operating Range
  - LMX2485Q-Q1 RF PLL: 500 MHz to 3.1 GHz
- Useful Features
  - Digital Lock Detect Output
  - Hardware and Software Power-Down Control
  - On-Chip Input Frequency Doubler
  - RF Phase Detector Frequency Up to 50 MHz
  - 2.5-V to 3.6-V Operation With  $I_{CC} = 5.0$  mA
  - LMX2485Q-Q1 is AEC-Q100 Grade 2 Qualified and is Manufactured on an Automotive Grade Flow

## 2 Applications

- Cellular Phones and Base Stations
- Direct Digital Modulation Applications
- Satellite and Cable TV Tuners
- WLAN Standards

## 3 Description

The LMX2485Q-Q1 is a low power, high performance delta-sigma fractional-N PLL with an auxiliary integer-N PLL. The device is fabricated using TI's advanced process.

With delta-sigma architecture, fractional spurs at lower offset frequencies are pushed to higher frequencies outside the loop bandwidth. The ability to push close in spur and phase noise energy to higher frequencies is a direct function of the modulator order. Unlike analog compensation, the digital feedback technique used in the LMX2485Q-Q1 is highly resistant to changes in temperature and variations in wafer processing. The LMX2485Q-Q1 delta-sigma modulator is programmable up to fourth order, which allows the designer to select the optimum modulator order to fit the phase noise, spur, and lock time requirements of the system.


Serial data for programming the LMX2485Q-Q1 is transferred through a three-line, high-speed (20-MHz) MICROWIRE interface. The LMX2485Q-Q1 offers fine frequency resolution, low spurs, fast programming speed, and a single word write to change the frequency. This makes it ideal for direct digital modulation applications, where the N-counter is directly modulated with information. The LMX2485Q-Q1 is available in a 24-lead 4.0 × 4.0 × 0.8 mm WQFN package.

### Device Information<sup>(1)</sup>

| PART NUMBER | PACKAGE   | BODY SIZE (NOM)   |
|-------------|-----------|-------------------|
| LMX2485Q-Q1 | WQFN (24) | 4.00 mm × 4.00 mm |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

### Functional Block Diagram

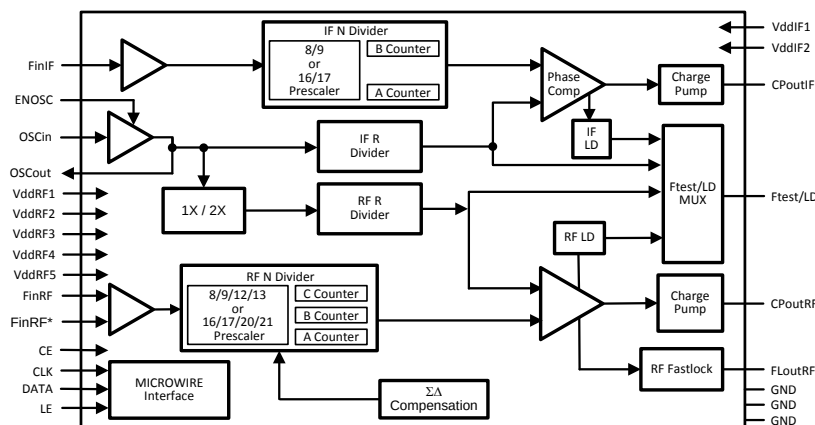

## Table of Contents


|                                                  |           |                                                                  |           |
|--------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                          | <b>1</b>  | 8.2 Functional Block Diagram .....                               | 19        |
| <b>2 Applications</b> .....                      | <b>1</b>  | 8.3 Feature Description.....                                     | 19        |
| <b>3 Description</b> .....                       | <b>1</b>  | 8.4 Device Functional Modes.....                                 | 25        |
| <b>4 Revision History</b> .....                  | <b>2</b>  | 8.5 Programming.....                                             | 26        |
| <b>5 Pin Configuration and Functions</b> .....   | <b>3</b>  | 8.6 Register Maps .....                                          | 28        |
| <b>6 Specifications</b> .....                    | <b>4</b>  | <b>9 Application and Implementation</b> .....                    | <b>40</b> |
| 6.1 Absolute Maximum Ratings .....               | 4         | 9.1 Application Information.....                                 | 40        |
| 6.2 ESD Ratings – Commercial .....               | 4         | 9.2 Typical Application .....                                    | 41        |
| 6.3 ESD Ratings – Automotive .....               | 4         | <b>10 Power Supply Recommendations</b> .....                     | <b>43</b> |
| 6.4 Recommended Operating Conditions.....        | 4         | <b>11 Layout</b> .....                                           | <b>43</b> |
| 6.5 Thermal Information .....                    | 4         | 11.1 Layout Guidelines .....                                     | 43        |
| 6.6 Electrical Characteristics.....              | 5         | 11.2 Layout Example .....                                        | 43        |
| 6.7 Timing Characteristics.....                  | 7         | <b>12 Device and Documentation Support</b> .....                 | <b>44</b> |
| 6.8 Typical Characteristics.....                 | 8         | 12.1 Community Resources.....                                    | 44        |
| <b>7 Parameter Measurement Information</b> ..... | <b>14</b> | 12.2 Trademarks .....                                            | 44        |
| 7.1 Bench Test Set-Ups.....                      | 14        | 12.3 Electrostatic Discharge Caution.....                        | 44        |
| <b>8 Detailed Description</b> .....              | <b>19</b> | 12.4 Glossary .....                                              | 44        |
| 8.1 Overview .....                               | 19        | <b>13 Mechanical, Packaging, and Orderable Information</b> ..... | <b>44</b> |

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Original (March 2013) to Revision A                                                                                                                                                                                                                                                                                                                                                                                                    | Page     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| <ul style="list-style-type: none"> <li>Added <i>Pin Configuration and Functions</i> section, <i>ESD Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i>, <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section .....</li> </ul> | <b>1</b> |

## 5 Pin Configuration and Functions

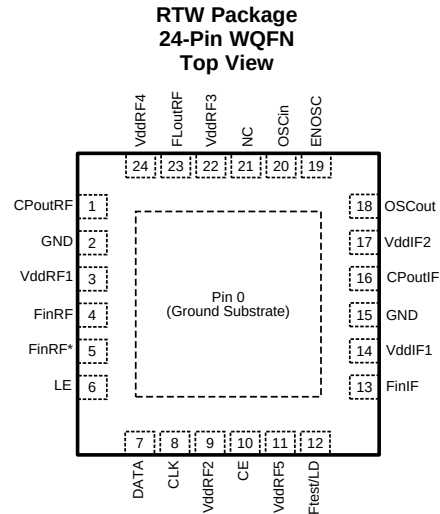

### Pin Functions

| PIN      |     | I/O | DESCRIPTION                                                                                                                                  |
|----------|-----|-----|----------------------------------------------------------------------------------------------------------------------------------------------|
| NAME     | NO. |     |                                                                                                                                              |
| CE       | 10  | I   | Chip Enable control pin. Must be pulled high for normal operation.                                                                           |
| CLK      | 8   | I   | MICROWIRE Clock. High-impedance CMOS Clock input. Data for the various counters is clocked into the 24 bit shift register on the rising edge |
| CPoutIF  | 16  | O   | IF PLL charge pump output                                                                                                                    |
| CPoutRF  | 1   | O   | RF PLL charge pump output.                                                                                                                   |
| DATA     | 7   | I   | MICROWIRE Data. High-impedance binary serial data input.                                                                                     |
| ENOSC    | 19  | I   | Oscillator enable. When this is set to high, the OSCout pin is enabled regardless of the state of other pins or register bits.               |
| FinIF    | 13  | I   | IF PLL high-frequency input pin.                                                                                                             |
| FinRF    | 4   | I   | RF PLL high-frequency input pin.                                                                                                             |
| FinRF*   | 5   | I   | RF PLL complementary high-frequency input pin. Shunt to ground with a 100-pF capacitor.                                                      |
| FLOutRF  | 23  | O   | RF PLL Fastlock Output. Also functions as Programmable TRI-STATE CMOS output.                                                                |
| Ftest/LD | 12  | O   | Test frequency output / Lock Detect.                                                                                                         |
| GND      | 0   | —   | Ground Substrate. This is on the bottom of the package and must be grounded.                                                                 |
| GND      | 2   | —   | RF PLL analog ground.                                                                                                                        |
| GND      | 15  | —   | IF PLL digital ground.                                                                                                                       |
| LE       | 6   | I   | MICROWIRE Load Enable. High impedance CMOS input. Data stored in the shift registers is loaded into the internal latches when LE goes HIGH   |
| NC       | 21  | I   | This pin must be left open.                                                                                                                  |
| OSCin    | 20  | I   | Input for TCXO signal.                                                                                                                       |
| OSCout   | 18  | O   | Buffered output of the OSCin signal.                                                                                                         |
| VddRF1   | 3   | —   | RF PLL analog power supply.                                                                                                                  |
| VddRF2   | 9   | —   | Power supply for RF PLL digital circuitry.                                                                                                   |
| VddRF3   | 22  | —   | Power supply for RF PLL digital circuitry.                                                                                                   |
| VddRF4   | 24  | —   | RF PLL analog power supply.                                                                                                                  |
| VddIF1   | 14  | —   | IF PLL analog power supply.                                                                                                                  |
| VddIF2   | 17  | —   | IF PLL power supply.                                                                                                                         |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                  |                                   | MIN  | MAX                   | UNIT |
|------------------|-----------------------------------|------|-----------------------|------|
| V <sub>CC</sub>  | Power supply voltage              | −0.3 | 4.25                  | V    |
| V <sub>i</sub>   | Voltage on any pin with GND = 0 V | −0.3 | V <sub>CC</sub> + 0.3 | V    |
| T <sub>L</sub>   | Lead temperature (solder 4 sec.)  |      | 260                   | °C   |
| T <sub>stg</sub> | Storage temperature               | −65  | 150                   | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 6.2 ESD Ratings – Commercial

|                    |                                        | VALUE | UNIT |
|--------------------|----------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge <sup>(1)</sup> |       |      |
|                    | Human-body model (HBM)                 | ±2000 | V    |
|                    | Charged-device model (CDM)             | ±750  |      |
|                    | Machine model (MM)                     | ±200  |      |

- (1) This is a high performance RF device is ESD-sensitive. Handling and assembly of this device should be done at an ESD free workstation.

### 6.3 ESD Ratings – Automotive

|                    |                                                         | VALUE | UNIT |
|--------------------|---------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge                                 |       |      |
|                    | Human-body model (HBM), per AEC Q100-002 <sup>(1)</sup> | ±2000 | V    |
|                    | Charged-device model (CDM), per AEC Q100-011            | ±750  |      |
|                    |                                                         | ±200  |      |

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 6.4 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                 |                                     | MIN | NOM | MAX | UNIT |
|-----------------|-------------------------------------|-----|-----|-----|------|
| V <sub>CC</sub> | Power supply voltage <sup>(1)</sup> | 2.5 | 3   | 3.6 | V    |
| T <sub>A</sub>  | Operating temperature               | −40 | 25  | 105 | °C   |

- (1) *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Recommended Operating Conditions* indicate conditions for which the device is intended to be functional, but do not ensure specific performance limits. For ensured specifications and test conditions, see the [Electrical Characteristics](#). The ensured specifications apply only for the test conditions listed. The voltage at all the power supply pins of VddRF1, VddRF2, VddRF3, VddRF4, VddRF5, VddIF1 and VddIF2 must be the same. V<sub>CC</sub> will be used to refer to the voltage at these pins and I<sub>CC</sub> will be used to refer to the sum of all currents through all these power pins.

### 6.5 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | LMX2485Q-Q1 | UNIT |
|-------------------------------|----------------------------------------------|-------------|------|
|                               |                                              | RTW (WQFN)  |      |
|                               |                                              | 24 PINS     |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 47.2        | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 43          | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 24          | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.8         | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 24          | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 7           | °C/W |

- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

## 6.6 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted). ( $V_{CC} = 3V$ ;  $-40^{\circ}C \leq T_A \leq +105^{\circ}C$  unless otherwise specified).

| PARAMETER                        |                                               | TEST CONDITIONS                                  | MIN             | TYP   | MAX  | UNIT    |
|----------------------------------|-----------------------------------------------|--------------------------------------------------|-----------------|-------|------|---------|
| <b>ICC PARAMETERS</b>            |                                               |                                                  |                 |       |      |         |
| $I_{CCRF}$                       | Power supply current, RF synthesizer          | IF PLL OFF<br>RF PLL ON<br>Charge Pump TRI-STATE |                 | 3.3   |      | mA      |
| $I_{CCIF}$                       | Power supply current, IF synthesizer          | IF PLL ON<br>RF PLL OFF<br>Charge Pump TRI-STATE |                 | 1.7   |      | mA      |
| $I_{CCTOTAL}$                    | Power supply current, entire synthesizer      | IF PLL ON<br>RF PLL ON<br>Charge Pump TRI-STATE  |                 | 5     |      | mA      |
| $I_{CCPD}$                       | Power-down current                            | CE = ENOSC = 0V<br>CLK, DATA, LE = 0V            |                 | 1     | 10   | $\mu A$ |
| <b>RF SYNTHESIZER PARAMETERS</b> |                                               |                                                  |                 |       |      |         |
| $f_{FinRF}$                      | Operating frequency <sup>(1)</sup>            | RF_P = 8                                         | 500             |       | 2000 | MHz     |
|                                  |                                               | RF_P = 16                                        | 500             |       | 3100 |         |
| $P_{FinRF}$                      | Input sensitivity                             |                                                  | -15             |       | 0    | dBm     |
| $f_{PD}$                         | Phase detector frequency <sup>(2)</sup>       |                                                  |                 |       | 50   | MHz     |
| $I_{CPoutRFSRCE}$                | RF charge pump source current <sup>(3)</sup>  | RF_CPG = 0<br>$V_{CPoutRF} = V_{CC}/2$           |                 | 95    |      | $\mu A$ |
|                                  |                                               | RF_CPG = 1<br>$V_{CPoutRF} = V_{CC}/2$           |                 | 190   |      |         |
|                                  |                                               | ...                                              |                 | ...   |      |         |
|                                  |                                               | RF_CPG = 15<br>$V_{CPoutRF} = V_{CC}/2$          |                 | 1520  |      |         |
| $I_{CPoutRFSINK}$                | RF charge pump sink current <sup>(3)</sup>    | RF_CPG = 0<br>$V_{CPoutRF} = V_{CC}/2$           |                 | -95   |      | $\mu A$ |
|                                  |                                               | RF_CPG = 1<br>$V_{CPoutRF} = V_{CC}/2$           |                 | -190  |      |         |
|                                  |                                               | ...                                              |                 | ...   |      |         |
|                                  |                                               | RF_CPG = 15<br>$V_{CPoutRF} = V_{CC}/2$          |                 | -1520 |      |         |
| $I_{CPoutRFTRI}$                 | RF charge pump TRI-STATE current magnitude    | $0.5 \leq V_{CPoutRF} \leq V_{CC} - 0.5$         |                 | 2     | 10   | nA      |
| $ I_{CPoutRF\%MIS} $             | Magnitude of RF CP sink vs CP source mismatch | $V_{CPoutRF} = V_{CC}/2$<br>$T_A = 25^{\circ}C$  | RF_CPG > 2      | 3%    | 10%  |         |
|                                  |                                               |                                                  | RF_CPG $\leq$ 2 | 3%    | 13%  |         |
| $ I_{CPoutRF\%T} $               | Magnitude of RF CP current vs temperature     | $V_{CPoutRF} = V_{CC}/2$                         |                 | 4%    |      |         |
| <b>IF SYNTHESIZER PARAMETERS</b> |                                               |                                                  |                 |       |      |         |
| $f_{FinIF}$                      | Operating Frequency                           |                                                  | 75              |       | 800  | MHz     |
| $P_{FinIF}$                      | IF Input Sensitivity                          |                                                  | -10             |       | 5    | dBm     |
| $f_{COMP}$                       | Phase Detector Frequency                      |                                                  |                 |       | 10   | MHz     |
| $I_{CPoutIFSRC}$                 | IF Charge Pump Source Current                 | $V_{CPoutIF} = V_{CC}/2$                         |                 | 3.5   |      | mA      |
| $I_{CPoutIFSINK}$                | IF Charge Pump Sink Current                   | $V_{CPoutIF} = V_{CC}/2$                         |                 | -3.5  |      | mA      |
| $I_{CPoutIFTRI}$                 | IF Charge Pump TRI-STATE Current Magnitude    | $0.5 \leq V_{CPoutIF} \leq V_{CC} - 0.5$         |                 | 2     | 10   | nA      |
| $ I_{CPoutIF\%MIS} $             | Magnitude of IF CP sink vs CP source mismatch | $V_{CPoutIF} = V_{CC}/2$<br>$T_A = 25^{\circ}C$  |                 | 1%    | 8%   |         |

(1) A slew rate of at least 100 V/ $\mu$ S is recommended for frequencies below 500 MHz for optimal performance.

(2) For Phase Detector Frequencies above 20 MHz, Cycle Slip Reduction (CSR) may be required. Legal divide ratios are also required.

(3) Refer to table in Table 25 for complete listing of charge pump currents.

## Electrical Characteristics (continued)

over operating free-air temperature range (unless otherwise noted). ( $V_{CC} = 3V$ ;  $-40^{\circ}C \leq T_A \leq +105^{\circ}C$  unless otherwise specified).

| PARAMETER                                                              |                                                                   | TEST CONDITIONS                                                 | MIN  | TYP            | MAX | UNIT      |
|------------------------------------------------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------|------|----------------|-----|-----------|
| $ I_{CPoutIF\%V} $                                                     | Magnitude of IF CP Current vs. CP Voltage                         | $0.5 \leq V_{CPoutIF} \leq V_{CC} - 0.5$<br>$T_A = 25^{\circ}C$ |      | 4%             | 10% |           |
| $ I_{CPoutIF\%TEMP} $                                                  | Magnitude of IF CP current vs temperature                         | $V_{CPoutIF} = V_{CC}/2$                                        |      | 4%             |     |           |
| <b>OSCILLATOR PARAMETERS</b>                                           |                                                                   |                                                                 |      |                |     |           |
| $f_{OSCin}$                                                            | Oscillator operating frequency                                    | OSC2X = 0                                                       | 5    | 110            |     | MHz       |
|                                                                        |                                                                   | OSC2X = 1                                                       | 5    | 20             |     | MHz       |
| $V_{OSCin}$                                                            | Oscillator input sensitivity                                      |                                                                 | 0.5  | $V_{CC}$       |     | $V_{P-P}$ |
| $I_{OSCin}$                                                            | Oscillator input current                                          |                                                                 | -100 | 100            |     | $\mu A$   |
| <b>SPURS</b>                                                           |                                                                   |                                                                 |      |                |     |           |
|                                                                        | Spurs in band                                                     | See <sup>(4)</sup>                                              |      | -55            |     | dBc       |
| <b>PHASE NOISE</b>                                                     |                                                                   |                                                                 |      |                |     |           |
| $L_{F1HzRF}$                                                           | RF synthesizer normalized phase noise contribution <sup>(5)</sup> | RF_CPG = 0                                                      |      | -202           |     | dBc/Hz    |
|                                                                        |                                                                   | RF_CPG = 1                                                      |      | -202           |     |           |
|                                                                        |                                                                   | RF_CPG = 3                                                      |      | -206           |     |           |
|                                                                        |                                                                   | RF_CPG = 7                                                      |      | -208           |     |           |
|                                                                        |                                                                   | RF_CPG = 15                                                     |      | -210           |     |           |
| $L_{F1HzIF}$                                                           | IF synthesizer normalized phase noise contribution                |                                                                 |      | -209           |     | dBc/Hz    |
| <b>DIGITAL INTERFACE (DATA, CLK, LE, ENOSC, CE, Ftest/LD, FLoutRF)</b> |                                                                   |                                                                 |      |                |     |           |
| $V_{IH}$                                                               | High-level input voltage                                          |                                                                 | 1.6  | $V_{CC}$       |     | V         |
| $V_{IL}$                                                               | Low-level input voltage                                           |                                                                 |      | 0.4            |     | V         |
| $I_{IH}$                                                               | High-level input current                                          | $V_{IH} = V_{CC}$                                               | -5   | 5              |     | $\mu A$   |
| $I_{IL}$                                                               | Low-level input current                                           | $V_{IL} = 0V$                                                   | -5   | 5              |     | $\mu A$   |
| $V_{OH}$                                                               | High-level output voltage                                         | $I_{OH} = -500 \mu A$                                           |      | $V_{CC} - 0.4$ |     | V         |
| $V_{OL}$                                                               | Low-level output voltage                                          | $I_{OL} = 500 \mu A$                                            |      | 0.4            |     | V         |


(4) In order to measure the in-band spur, the fractional word is chosen such that when reduced to lowest terms, the fractional numerator is one. The spur offset frequency is chosen to be the comparison frequency divided by the reduced fractional denominator. The loop bandwidth must be sufficiently wide to negate the impact of the loop filter. Measurement conditions are: Spur Offset Frequency = 10 kHz, Loop Bandwidth = 100 kHz, Fraction = 1/2000, Comparison Frequency = 20 MHz, RF\_CPG = 7, DITH = 0, and a 4th Order Modulator (FM = 0). These are relatively consistent over tuning range.

(5) Normalized Phase Noise Contribution is defined as:  $L_N(f) = L(f) - 20\log(N) - 10\log(f_{COMP})$  where  $L(f)$  is defined as the single side band phase noise measured at an offset frequency,  $f$ , in a 1 Hz Bandwidth. The offset frequency,  $f$ , must be chosen sufficiently smaller than the PLL loop bandwidth, yet large enough to avoid substantial phase noise contribution from the reference source. Measurement conditions are: Offset Frequency = 11 kHz, Loop Bandwidth = 100 kHz for RF\_CPG = 7, Fraction = 1/2000, Comparison Frequency = 20 MHz, FM = 0, DITH = 0.

## 6.7 Timing Characteristics

over operating free-air temperature range (unless otherwise noted)

|                                   |                                  |              | MIN | NOM | MAX | UNIT |
|-----------------------------------|----------------------------------|--------------|-----|-----|-----|------|
| <b>MICROWIRE INTERFACE TIMING</b> |                                  |              |     |     |     |      |
| $t_{CS}$                          | Data to Clock Set Up Time        | See Figure 1 | 25  |     |     | ns   |
| $t_{CH}$                          | Data to Clock Hold Time          | See Figure 1 | 8   |     |     | ns   |
| $t_{CWH}$                         | Clock Pulse Width High           | See Figure 1 | 25  |     |     | ns   |
| $t_{CWL}$                         | Clock Pulse Width Low            | See Figure 1 | 25  |     |     | ns   |
| $t_{ES}$                          | Clock to Load Enable Set Up Time | See Figure 1 | 25  |     |     | ns   |
| $t_{EW}$                          | Load Enable Pulse Width          | See Figure 1 | 25  |     |     | ns   |






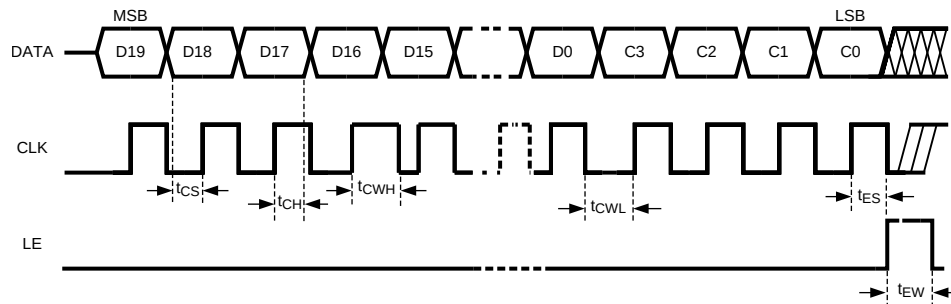


**Figure 1. Microwire Input Timing Diagram**

## 6.8 Typical Characteristics

### 6.8.1 Sensitivity


Typical characteristics do not imply any sort of specification. Ensured specifications are in the [Electrical Characteristics](#) section.

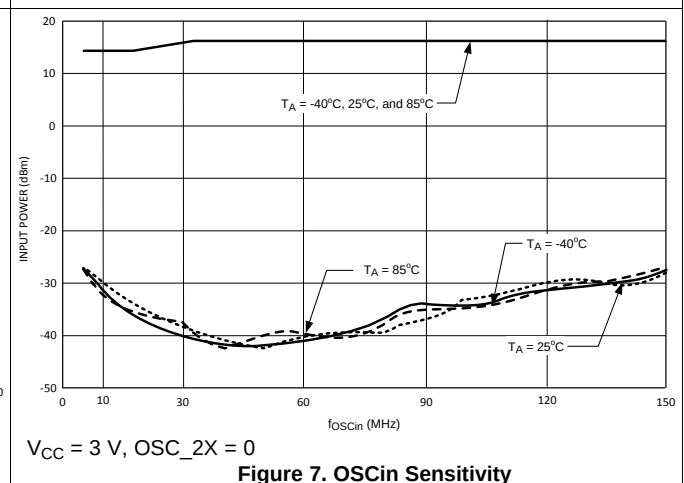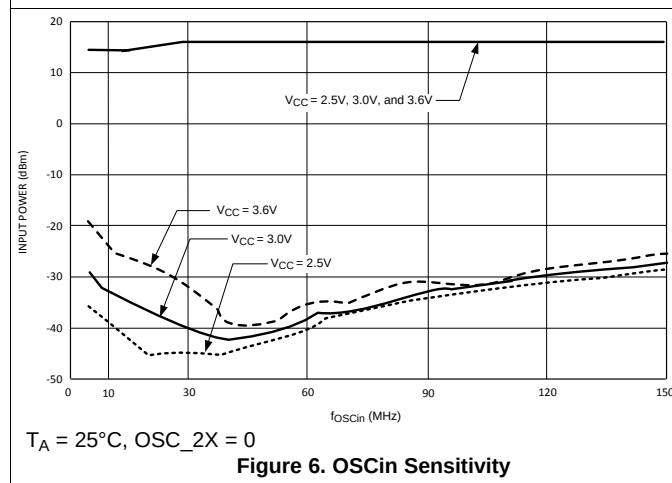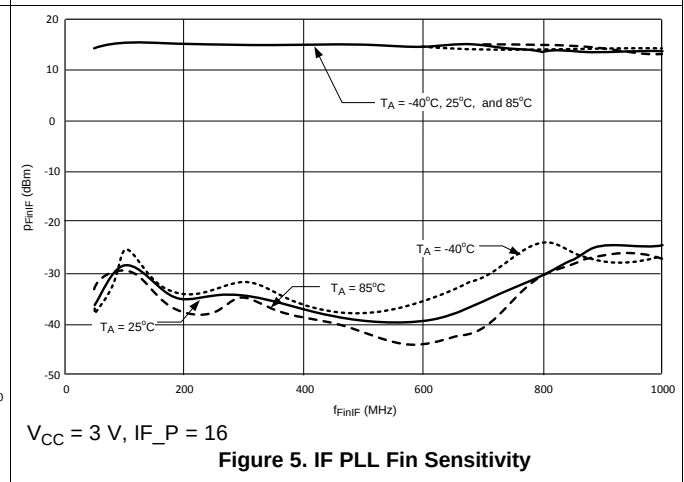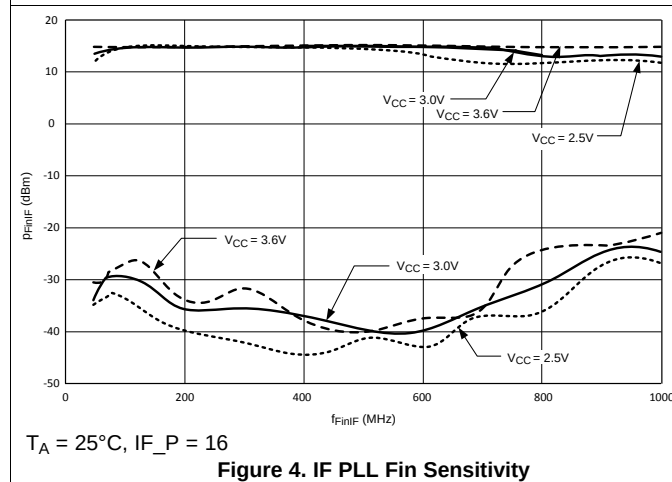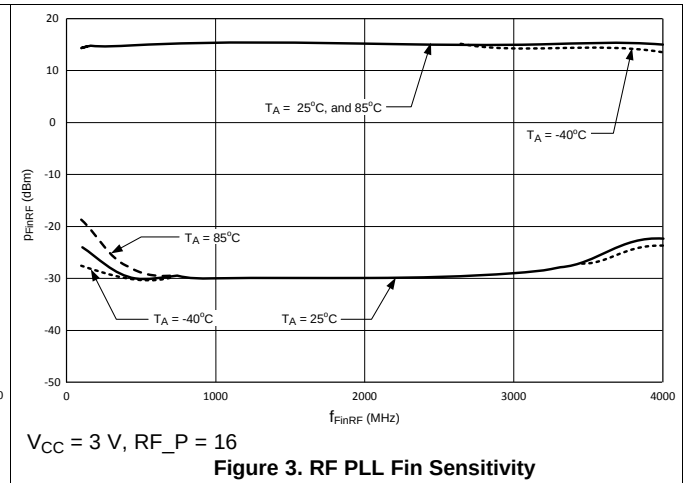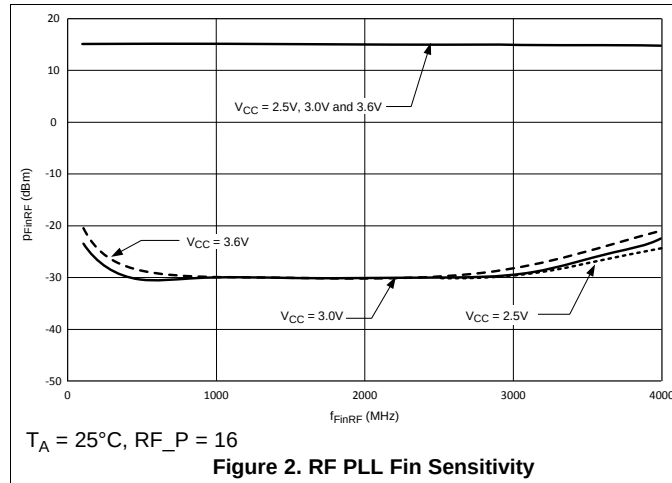




## Sensitivity (continued)

Typical characteristics do not imply any sort of specification. Ensured specifications are in the [Electrical Characteristics](#) section.

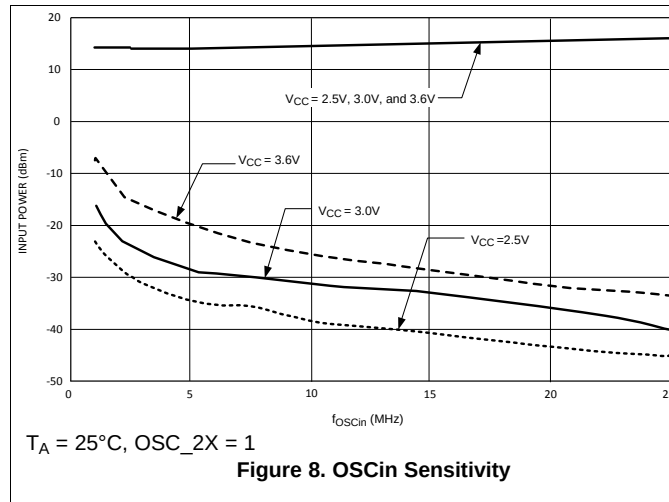


**Figure 8. OSCin Sensitivity**

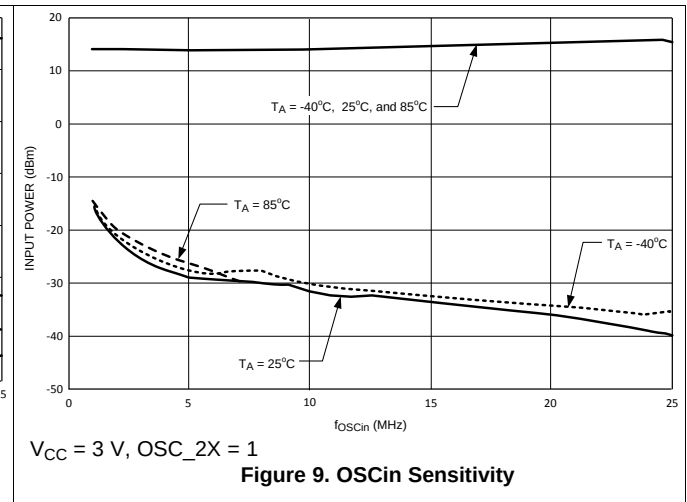

**Figure 9. OSCin Sensitivity**

## 6.8.2 FinRF Input Impedance

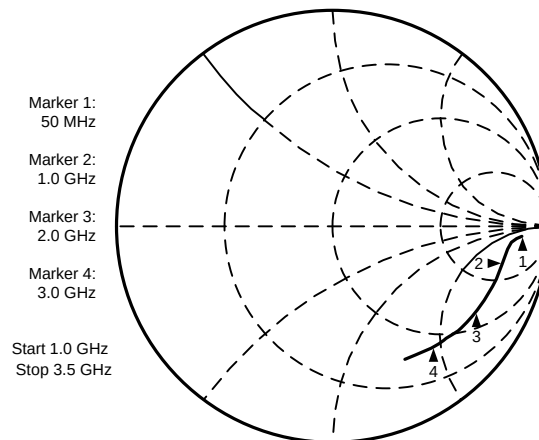

**Figure 10. FinRF Input Impedance**

**Table 1. RF PLL Input Impedance**


| FREQUENCY (MHz) | REAL (Ω) | IMAGINARY (Ω) |
|-----------------|----------|---------------|
| 50              | 670      | -276          |
| 100             | 531      | -247          |
| 200             | 452      | -209          |
| 300             | 408      | -212          |
| 400             | 373      | -222          |
| 500             | 337      | -231          |
| 600             | 302      | -237          |
| 700             | 270      | -239          |
| 800             | 241      | -236          |
| 900             | 215      | -231          |
| 1000            | 192      | -221          |
| 1100            | 172      | -218          |
| 1200            | 154      | -209          |

**FinRF Input Impedance (continued)**
**Table 1. RF PLL Input Impedance (continued)**

| FREQUENCY (MHz) | REAL ( $\Omega$ ) | IMAGINARY ( $\Omega$ ) |
|-----------------|-------------------|------------------------|
| 1300            | 139               | –200                   |
| 1400            | 127               | –192                   |
| 1500            | 114               | –184                   |
| 1600            | 104               | –175                   |
| 1700            | 96                | –168                   |
| 1800            | 88                | –160                   |
| 1900            | 80                | –153                   |
| 2000            | 74                | –147                   |
| 2200            | 64                | –134                   |
| 2400            | 56                | –123                   |
| 2600            | 50                | –113                   |
| 2800            | 45                | –103                   |
| 3000            | 39                | –94                    |
| 3200            | 37                | –86                    |
| 3400            | 33                | –78                    |
| 3600            | 30                | –72                    |
| 3800            | 28                | –69                    |
| 4000            | 26                | –66                    |

### 6.8.3 FinIF Input Impedance

Typical characteristics do not imply any sort of specification. Ensured specifications are in the [Electrical Characteristics](#) section.

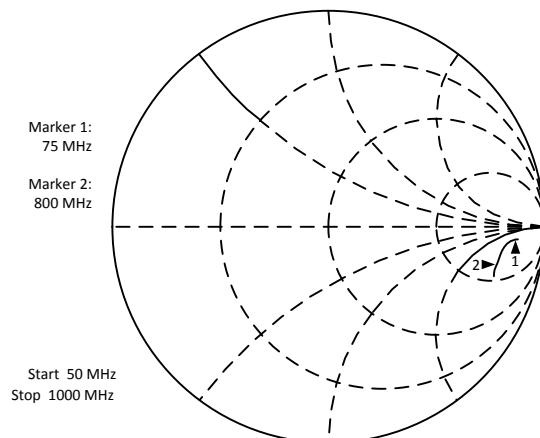


**Figure 11. FinIF Input Impedance**

**Table 2. IF PLL Input Impedance**

| FinIF INPUT IMPEDANCE |                   |                        |
|-----------------------|-------------------|------------------------|
| FREQUENCY (MHz)       | REAL ( $\Omega$ ) | IMAGINARY ( $\Omega$ ) |
| 50                    | 583               | -286                   |
| 75                    | 530               | -256                   |
| 100                   | 499               | -241                   |
| 200                   | 426               | -209                   |
| 300                   | 384               | -209                   |
| 400                   | 347               | -219                   |
| 500                   | 310               | -224                   |
| 600                   | 276               | -228                   |
| 700                   | 244               | -228                   |
| 800                   | 216               | -223                   |
| 900                   | 192               | -218                   |
| 1000                  | 173               | -208                   |

### 6.8.4 OSCin Input Impedance

Typical characteristics do not imply any sort of specification. Ensured specifications are in the [Electrical Characteristics](#) section.

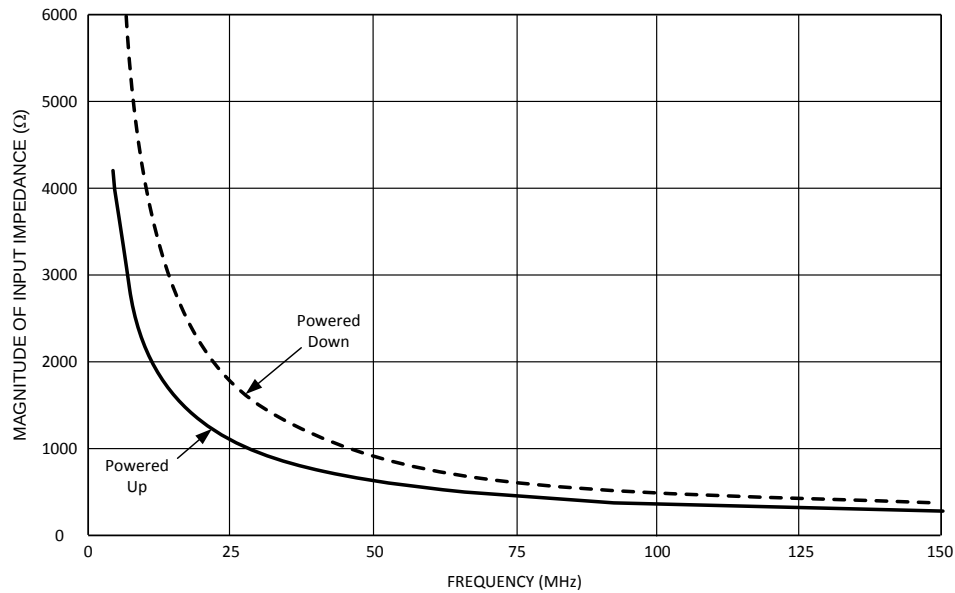

**Figure 12. OSCin Input Impedance Magnitude**

**Table 3. OSCin Input Impedance**

| FREQUENCY<br>(MHz) | POWERED-UP |           |           | POWERED-DOWN |           |           |
|--------------------|------------|-----------|-----------|--------------|-----------|-----------|
|                    | REAL       | IMAGINARY | MAGNITUDE | REAL         | IMAGINARY | MAGNITUDE |
| 5                  | 1730       | –3779     | 4157      | 392          | –8137     | 8146      |
| 10                 | 846        | –2236     | 2391      | 155          | –4487     | 4490      |
| 20                 | 466        | –1196     | 1284      | 107          | –2215     | 2217      |
| 30                 | 351        | –863      | 932       | 166          | –1495     | –1504     |
| 40                 | 316        | –672      | 742       | 182          | –1144     | 1158      |
| 50                 | 278        | –566      | 631       | 155          | –912      | 925       |
| 60                 | 261        | –481      | 547       | 153          | –758      | 774       |
| 70                 | 252        | –425      | 494       | 154          | –652      | 669       |
| 80                 | 239        | –388      | 456       | 147          | –576      | 595       |
| 90                 | 234        | –358      | 428       | 145          | –518      | 538       |
| 100                | 230        | –337      | 407       | 140          | –471      | 492       |
| 110                | 225        | –321      | 392       | 138          | –436      | 458       |
| 120                | 219        | –309      | 379       | 133          | –402      | 123       |
| 130                | 214        | –295      | 364       | 133          | –374      | 397       |
| 140                | 208        | –285      | 353       | 132          | –349      | 373       |
| 150                | 207        | –279      | 348       | 133          | –329      | 355       |

## 6.8.5 Currents

Typical characteristics do not imply any sort of specification. Ensured specifications are in the [Electrical Characteristics](#) section.

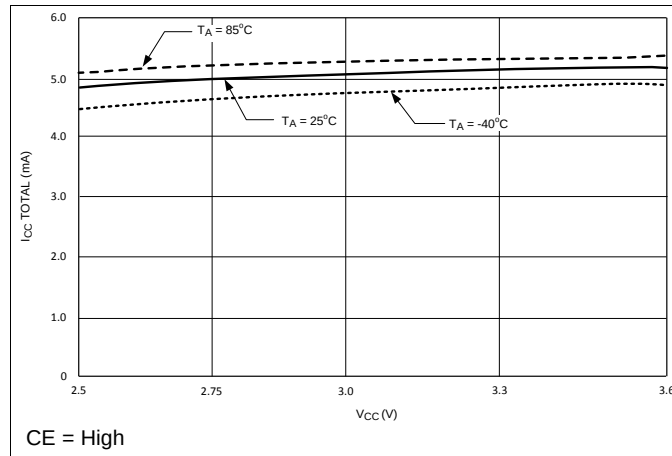


Figure 13. Power Supply Current

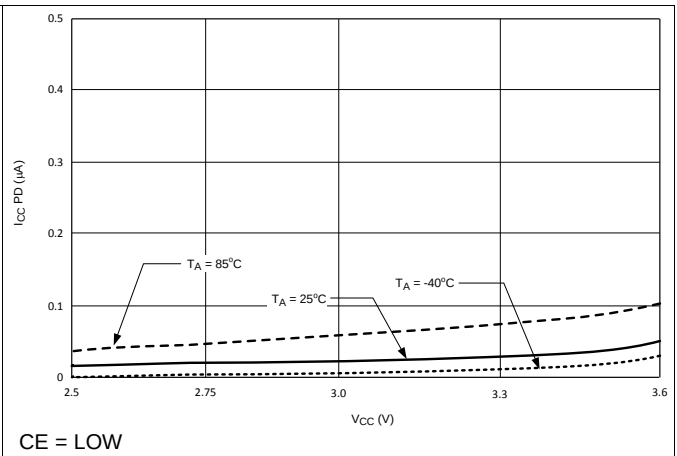


Figure 14. Power Supply Current

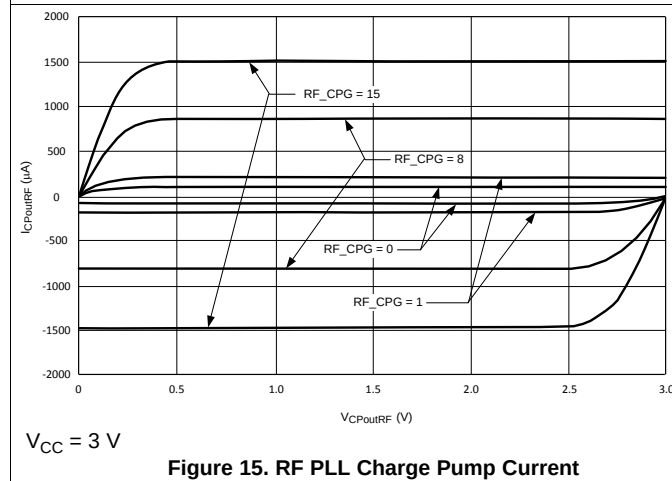


Figure 15. RF PLL Charge Pump Current

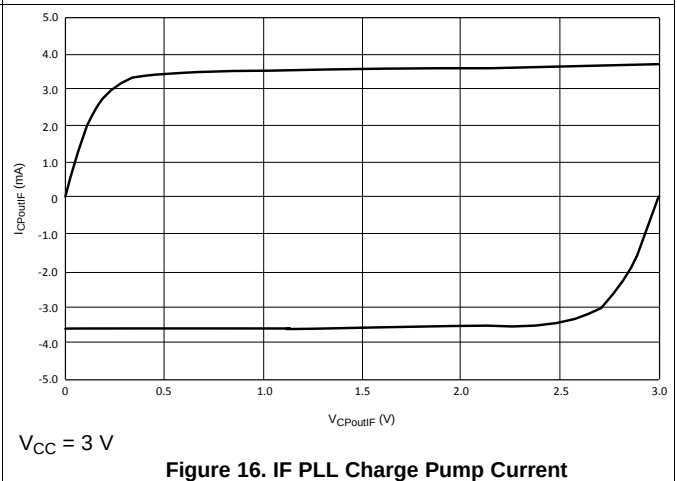


Figure 16. IF PLL Charge Pump Current

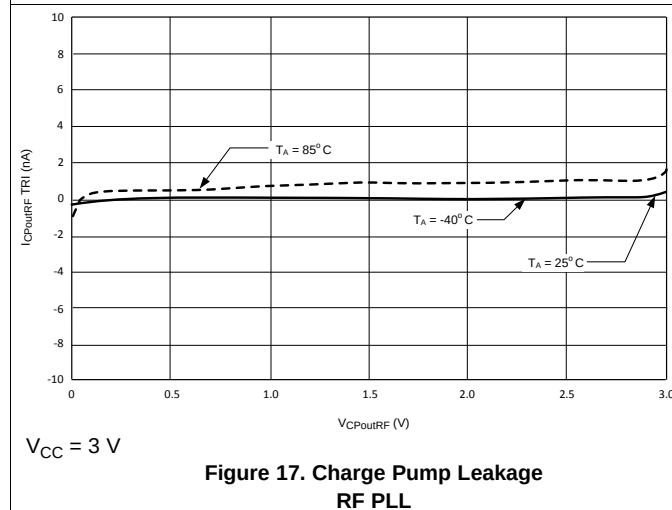


Figure 17. Charge Pump Leakage  
RF PLL


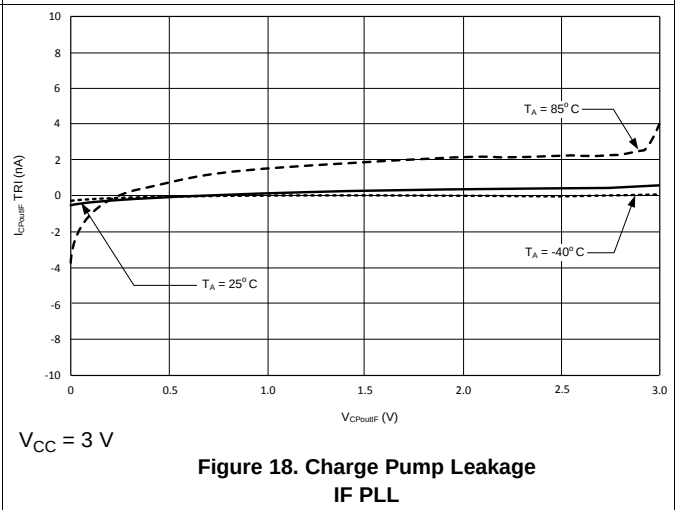


Figure 18. Charge Pump Leakage  
IF PLL

## 7 Parameter Measurement Information

### 7.1 Bench Test Set-Ups

#### 7.1.1 Charge Pump Current Measurement Procedure

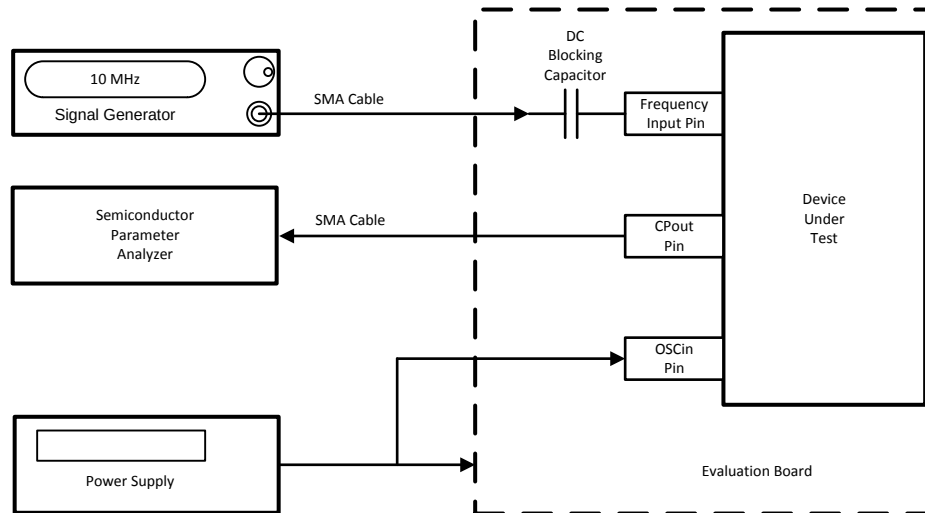

**Figure 19. Setup for Charge Pump Current Measurement**

Figure 19 shows the test procedure for testing the RF and IF charge pumps. These tests include absolute current level, mismatch, and leakage measurement. In order to measure the charge pump currents, a signal is applied to the high-frequency input pins. The reason for this is to specify that the phase detector gets enough transitions in order to be able to change states. If no signal is applied, it is possible that the charge pump current reading will be low due to the fact that the duty cycle is not 100%. The OSCin Pin is tied to the supply. The charge pump currents can be measured by simply programming the phase detector to the necessary polarity. For instance, in order to measure the RF charge pump, a 10-MHz signal is applied to the FinRF pin. The source current can be measured by setting the RF PLL phase detector to a positive polarity, and the sink current can be measured by setting the phase detector to a negative polarity. The IF PLL currents can be measured in a similar way.


#### NOTE

The magnitude of the RF PLL charge pump current is controlled by the RF\_CPG bit. Once the charge pump currents are known, the mismatch can be calculated as well. In order to measure leakage, the charge pump is set to a TRI-STATE mode by enabling the RF\_CPT and IF\_CPT bits. The table below shows a summary of the various charge pump tests.

**Table 4. Programmable Settings for Charge Pump Current Measurement**

| CURRENT TEST | RF_CPG  | RF_CPP | RF_CPT | IF_CPP | IF_CPT |
|--------------|---------|--------|--------|--------|--------|
| RF Source    | 0 to 15 | 0      | 0      | X      | X      |
| RF Sink      | 0 to 15 | 1      | 0      | X      | X      |
| RF TRI-STATE | X       | X      | 1      | X      | X      |
| IF Source    | X       | X      | X      | 0      | 0      |
| IF Sink      | X       | X      | X      | 1      | 0      |
| IF TRI-STATE | X       | X      | X      | X      | 1      |

## 7.1.2 Charge Pump Current Specification Definitions

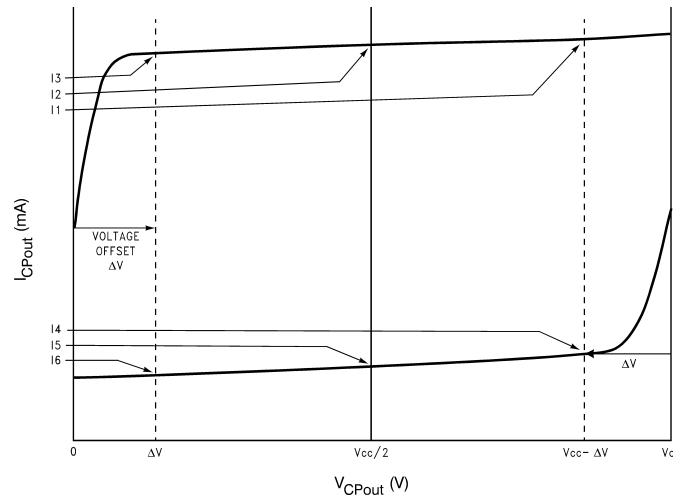

**Figure 20. Charge Pump Current Definitions**

I1 = Charge Pump Sink Current at  $V_{CPout} = V_{CC} - \Delta V$

I2 = Charge Pump Sink Current at  $V_{CPout} = V_{CC}/2$

I3 = Charge Pump Sink Current at  $V_{CPout} = \Delta V$

I4 = Charge Pump Source Current at  $V_{CPout} = V_{CC} - \Delta V$

I5 = Charge Pump Source Current at  $V_{CPout} = V_{CC}/2$

I6 = Charge Pump Source Current at  $V_{CPout} = \Delta V$

$\Delta V$  = Voltage offset from the positive and negative supply rails. Defined to be 0.5 V for this part.

$V_{CPout}$  refers to either  $V_{CPoutRF}$  or  $V_{CPoutIF}$

$I_{CPout}$  refers to either  $I_{CPoutRF}$  or  $I_{CPoutIF}$

### 7.1.2.1 Charge Pump Output Current Variation vs Charge Pump Output Voltage

$$I_{CPout} \text{ Vs } V_{CPout} = \frac{(|I1| - |I3|)}{(|I1| + |I3|)} \times 100\%$$

$$= \frac{(|I4| - |I6|)}{(|I4| + |I6|)} \times 100\%$$
(1)

### 7.1.2.2 Charge Pump Sink Current vs Charge Pump Output Source Current Mismatch


$$I_{CPout} \text{ Sink Vs } I_{CPout} \text{ Source} = \frac{|I2| - |I5|}{\frac{1}{2}(|I2| + |I5|)} \times 100\%$$
(2)

### 7.1.2.3 Charge Pump Output Current Variation vs Temperature

$$\begin{aligned}
 I_{CPout} \text{ Vs } T_A &= \frac{|I_2|_{T_A} - |I_2|_{T_A=25^\circ C}}{|I_2|_{T_A=25^\circ C}} \times 100\% \\
 &= \frac{|I_5|_{T_A} - |I_5|_{T_A=25^\circ C}}{|I_5|_{T_A=25^\circ C}} \times 100\%
 \end{aligned}
 \tag{3}$$



### 7.1.3 Sensitivity Measurement Procedure

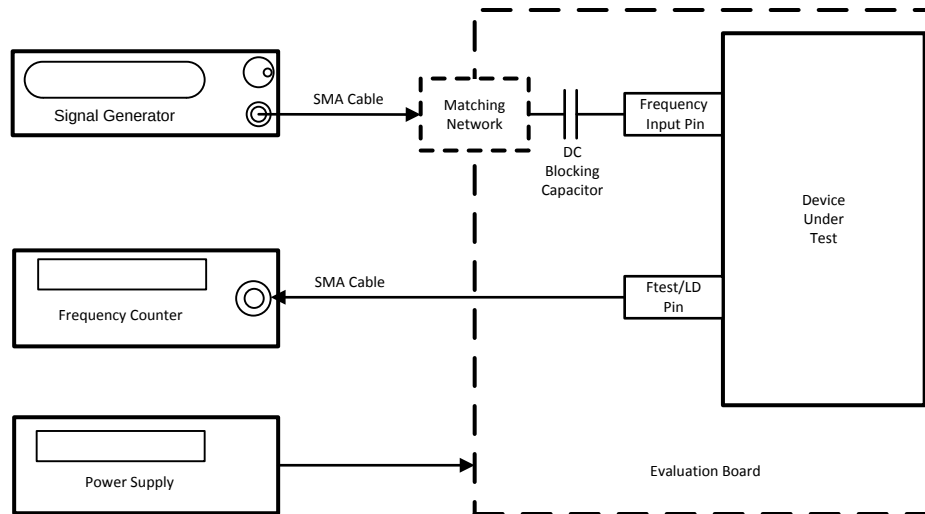

**Figure 21. Setup for Sensitivity Measurement**

**Table 5. Programmable Settings for Sensitivity Measurement**

| FREQUENCY INPUT PIN | DC-BLOCKING CAPACITOR | CORRESPONDING COUNTER | DEFAULT COUNTER VALUE   | MUX VALUE |
|---------------------|-----------------------|-----------------------|-------------------------|-----------|
| OSCI <sub>in</sub>  | 1000 pF               | RF_R / 2              | 50                      | 14        |
| FinRF               | 100 pF// 1000 pF      | RF_N / 2              | 502 + 2097150 / 4194301 | 15        |
| FinIF               | 100 pF                | IF_N / 2              | 534                     | 13        |
| OSCI <sub>in</sub>  | 1000 pF               | IF_R / 2              | 50                      | 12        |

Sensitivity is defined as the power level limits beyond which the output of the counter being tested is off by 1 Hz or more of its expected value. It is typically measured over frequency, voltage, and temperature. In order to test sensitivity, the MUX[3:0] word is programmed to the appropriate value. The counter value is then programmed to a fixed value and a frequency counter is set to monitor the frequency of this pin. The expected frequency at the Ftest/LD pin should be the signal generator frequency divided by twice the corresponding counter value. The factor of two comes in because the LMX2485Q-Q1 has a flip-flop which divides this frequency by two to make the duty cycle 50% in order to make it easier to read with the frequency counter. The frequency counter input impedance should be set to high impedance. In order to perform the measurement, the temperature, frequency, and voltage is set to a fixed value and the power level of the signal is varied.

#### NOTE


The power level at the part is assumed to be 4 dB less than the signal generator power level. This accounts for 1 dB for cable losses and 3 dB for the pad.

The power level range where the frequency is correct at the Ftest/LD pin to within 1-Hz accuracy is recorded for the sensitivity limits. The temperature, frequency, and voltage can be varied in order to produce a family of sensitivity curves. Because this is an open-loop test, the charge pump is set to TRI-STATE and the unused side of the PLL (RF or IF) is powered down when not being tested. For this part, there are actually four frequency input pins, although there is only one frequency test pin (Ftest/LD). The conditions specific to each pin are shown in above table.

#### NOTE

For the RF N counter, a fourth order fractional modulator is used in 22-bit mode with a fraction of 2097150 / 4194301 is used. The reason for this long fraction is to test the RF N counter and supporting fractional circuitry as completely as possible.

### 7.1.4 Input Impedance Measurement Procedure

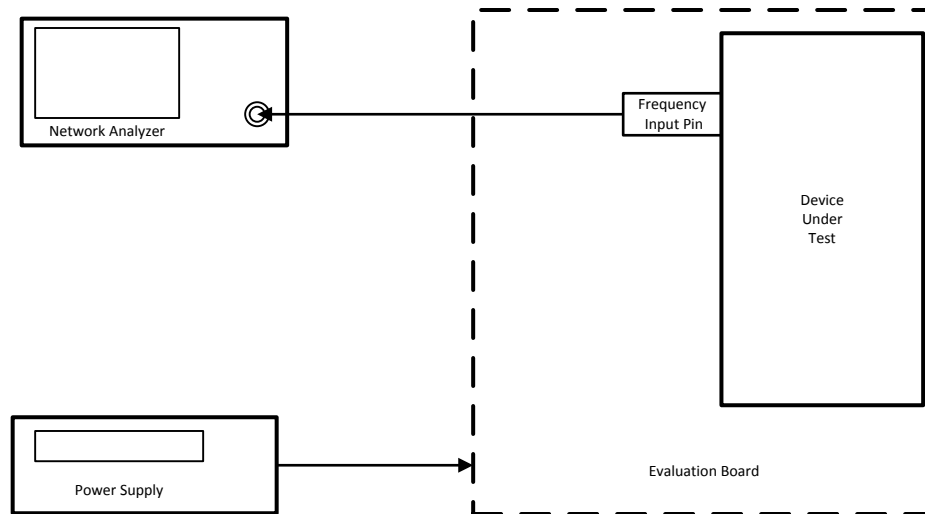

**Figure 22. Setup for Input Impedance Measurement**


Figure 22 shows the test set-up used for measuring the input impedance for the LMX2485Q-Q1. The DC-blocking capacitor used between the input SMA connector and the pin being measured must be changed to a 0- $\Omega$  resistor. This procedure applies to the FinRF, FinIF, and OSCin pins. The basic test procedure is to calibrate the network analyzer, ensure that the part is powered up, and then measure the input impedance. The network analyzer can be calibrated by using either calibration standards or by soldering resistors directly to the evaluation board. An open can be implemented by putting no resistor, a short can be implemented by soldering a 0- $\Omega$  resistor as close as possible to the pin being measured, and a short can be implemented by soldering two 100- $\Omega$  resistors in parallel as close as possible to the pin being measured. Calibration is done with the PLL removed from the PCB. This requires the use of a clamp down fixture that may not always be generally available. If no clamp down fixture is available, then this procedure can be done by calibrating up to the point where the DC-blocking capacitor usually is, and then implementing port extensions with the network analyzer. The 0- $\Omega$  resistor is added back for the actual measurement. Once the set-up is calibrated, it is necessary to ensure that the PLL is powered up. This can be done by toggling the power down bits (RF\_PD and IF\_PD) and observing that the current consumption indeed increases when the bit is disabled. Sometimes it may be necessary to apply a signal to the OSCin pin in order to program the part. If this is necessary, disconnect the signal once it is established that the part is powered up. It is useful to know the input impedance of the PLL for the purposes of debugging RF problems and designing matching networks. Another use of knowing this parameter is make the trace width on the PCB such that the input impedance of this trace matches the real part of the input impedance of the PLL frequency of operation. In general, it is good practice to keep trace lengths short and make designs that are relatively resistant to variations in the input impedance of the PLL.

## 8 Detailed Description

### 8.1 Overview

The LMX2485Q-Q1 consists of integrated N counters, R counters, and charge pumps. The TCXO, VCO and loop filter are supplied external to the chip.

### 8.2 Functional Block Diagram

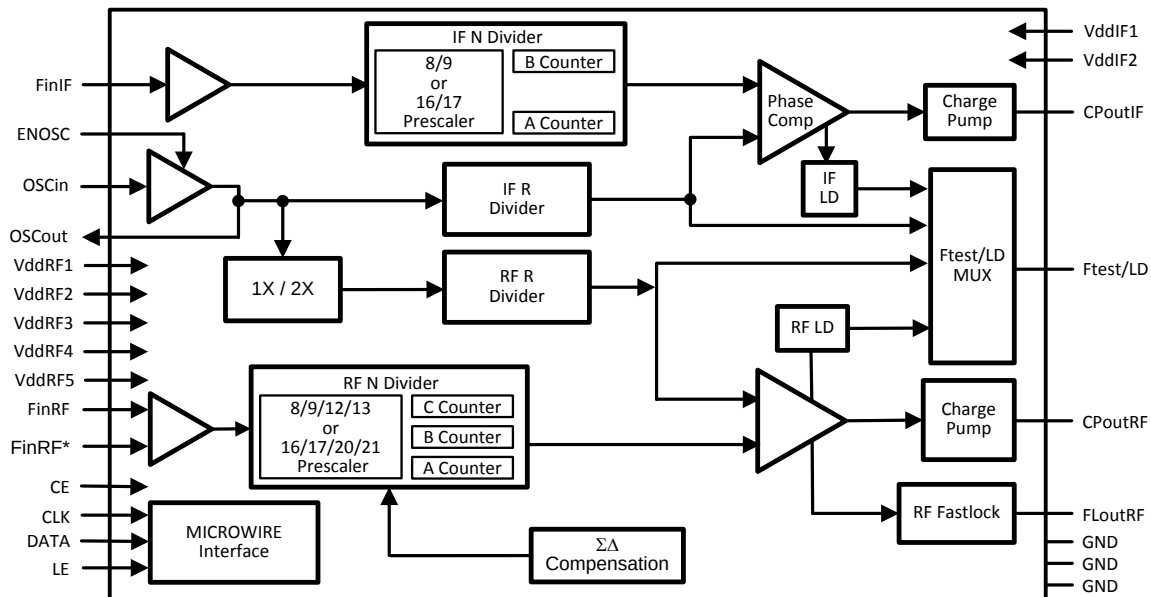

### 8.3 Feature Description

#### 8.3.1 Tcxo, Oscillator Buffer, and R Counter

The oscillator buffer must be driven single-ended by a signal source, such as a TCXO. The OSCout pin is included to provide a buffered output of this input signal and is active when the OSC\_OUT bit is set to one. The ENOSC pin can be also pulled high to ensure that the OSCout pin is active, regardless of the status of the registers in the LMX2485Q-Q1.

The R counter divides this TXCO frequency down to the comparison frequency.

#### 8.3.2 Phase Detector

The maximum phase detector operating frequency for the IF PLL is straightforward, but it is a little more involved for the RF PLL because it is fractional. The maximum phase detector frequency for the LMX2485Q-Q1 RF PLL is 50 MHz. However, this is not possible in all circumstances due to illegal divide ratios of the N counter. The crystal reference frequency also limits the phase detector frequency, although the doubler helps with this limitation. There are trade-offs in choosing the phase detector frequency. If this frequency is run higher, then phase noise will be lower, but lock time may be increased due to cycle slipping and the capacitors in the loop filter may become rather large.

#### 8.3.3 Charge Pump

For the majority of the time, the charge pump output is high impedance, and the only current through this pin is the TRI-STATE leakage. However, it does put out fast correction pulses that have a width that is proportional to the phase error presented at the phase detector.

The charge pump converts the phase error presented at the phase detector into a correction current. The magnitude of this current is theoretically constant, but the duty cycle is proportional to the phase error. For the IF PLL, this current is not programmable, but for the RF PLL it is programmable in 16 steps. Also, the RF PLL allows for a higher charge pump current to be used when the PLL is locking in order to reduce the lock time.

## Feature Description (continued)

### 8.3.4 Loop Filter

The loop filter design can be rather involved. In addition to the regular constraints and design parameters, delta-sigma PLLs have the additional constraint that the order of the loop filter should be one greater than the order of the delta sigma modulator. This rule of thumb comes from the requirement that the loop filter must roll off the delta sigma noise at 20 dB/decade faster than it rises. However, because the noise can not have infinite power, it must eventually roll off. If the loop bandwidth is narrow, this requirement may not be necessary. For the purposes of discussion in this datasheet, the pole of the loop filter at 0 Hz is not counted. So a second order filter has 3 components, a 3rd order loop filter has 5 components, and the 4th order loop filter has 7 components. Although a 5th order loop filter is theoretically necessary for use with a 4th order modulator, typically a 4th order filter is used in this case. The loop filter design, especially for higher orders can be rather involved, but there are many simulation tools and references available, such as the one given at the end of the functional description block.

### 8.3.5 N Counters and High Frequency Input Pins

The N counter divides the VCO frequency down to the comparison frequency. Because prescalers are used, there are limitations on how small the N value can be. The N counters are discussed in greater depth in the [Programming](#) section. Because the input pins to these counters (FinRF and FinIF) are high frequency, layout considerations are important.

#### 8.3.5.1 High Frequency Input Pins, FinRF and FinIF

It is generally recommended that the VCO output go through a resistive pad and then through a DC-blocking capacitor before it gets to these high frequency input pins. If the trace length is sufficiently short ( $< 1/10$ th of a wavelength), then the pad may not be necessary, but a series resistor of about  $39\ \Omega$  is still recommended to isolate the PLL from the VCO. The DC-blocking capacitor should be chosen at least to be 27 pF, depending on frequency. It may turn out that the frequency is above the self-resonant frequency of the capacitor, but because the input impedance of the PLL tends to be capacitive, it actually is a benefit to exceed the tune frequency. The pad and the DC-blocking capacitor should be placed as close to the PLL as possible

#### 8.3.5.2 Complementary High Frequency Pin, FinRF\*

These inputs may be used to drive the PLL differentially, but it is very common to drive the PLL in a single ended fashion. A shunt capacitor should be placed at the FinRF\* pin. The value of this capacitor should be chosen such that the impedance, including the ESR of the capacitor, is as close to an AC short as possible at the operating frequency of the PLL. 100 pF is a typical value, depending on frequency.

### 8.3.6 Digital Lock Detect Operation

The RF PLL digital lock detect circuitry compares the difference between the phase of the inputs of the phase detector to a RC generated delay of  $\epsilon$ . To indicate a locked state (Lock = HIGH) the phase error must be less than the  $\epsilon$  RC delay for 5 consecutive reference cycles. Once in lock (Lock = HIGH), the RC delay is changed to approximately  $\delta$ . To indicate an out of lock state (Lock = LOW), the phase error must become greater  $\delta$ . The values of  $\epsilon$  and  $\delta$  are dependent on which PLL is used and are shown in [Table 6](#):


**Table 6. Programmable Digital Lock Detect Settings**

| PLL | $\epsilon$ | $\delta$ |
|-----|------------|----------|
| RF  | 10 ns      | 20 ns    |
| IF  | 15 ns      | 30 ns    |

When the PLL is in the power-down mode and the Ftest/LD pin is programmed for the lock detect function, it is forced LOW. The accuracy of this circuit degrades at higher comparison frequencies. To compensate for this, the DIV4 word should be set to one if the comparison frequency exceeds 20 MHz. The function of this word is to divide the comparison frequency presented to the lock detect circuit by 4.

#### NOTE

If the MUX[3:0] word is set such as to view lock detect for both PLLs, an unlocked (LOW) condition is shown whenever either one of the PLLs is determined to be out of lock.

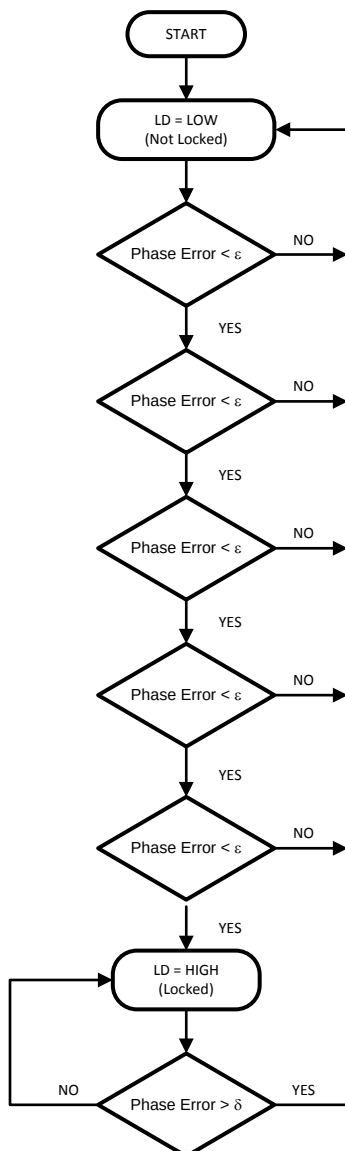

**Figure 23. Digital Lock Detect Flowchart**

### 8.3.7 Cycle Slip Reduction and Fastlock

The LMX2485Q-Q1 offers both cycle slip reduction (CSR) and Fastlock with timeout counter support. This means that it requires no additional programming overhead to use them. It is generally recommended that the charge pump current in the steady-state be 8X or less in order to use cycle slip reduction, and 4X or less in steady-state in order to use Fastlock. The next step is to decide between using Fastlock or CSR. This determination can be made based on the ratio of the comparison frequency ( $f_{\text{COMP}}$ ) to loop bandwidth (BW).

**Table 7. Cycle Slip/Fastlock Usage**

| COMPARISON FREQUENCY<br>( $f_{\text{COMP}}$ )           | FASTLOCK                   | CYCLE SLIP REDUCTION<br>(CSR)                                                          |
|---------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------|
| $f_{\text{COMP}} \leq 1.25 \text{ MHz}$                 | Noticeable better than CSR | Likely to provide a benefit, provided that<br>$f_{\text{COMP}} > 100 \times \text{BW}$ |
| $1.25 \text{ MHz} < f_{\text{COMP}} \leq 2 \text{ MHz}$ | Marginally better than CSR |                                                                                        |
| $f_{\text{COMP}} > 2 \text{ MHz}$                       | Same or worse than CSR     |                                                                                        |

#### 8.3.7.1 Cycle Slip Reduction (CSR)

Cycle slip reduction works by reducing the comparison frequency during frequency acquisition while keeping the same loop bandwidth, thereby reducing the ratio of the comparison frequency to the loop bandwidth. In cases where the ratio of the comparison frequency exceeds about 100 times the loop bandwidth, cycle slipping can occur and significantly degrade lock times. The greater this ratio, the greater the benefit of CSR. This is typically the case of high comparison frequencies. In circumstances where there is not a problem with cycle slipping, CSR provides no benefit. There is a glitch when CSR is disengaged, but because CSR should be disengaged long before the PLL is actually in lock, this glitch is not an issue. A good rule of thumb for CSR disengagement is to do this at the peak time of the transient response. Because this time is typically much sooner than Fastlock should be disengaged, it does not make sense to use CSR and Fastlock in combination.

#### 8.3.7.2 Fastlock

Fastlock works by increasing the loop bandwidth only during frequency acquisition. In circumstances where the comparison frequency is less than or equal to 2 MHz, Fastlock may provide a benefit beyond what CSR can offer. Because Fastlock also reduces the ratio of the comparison frequency to the loop bandwidth, it may provide a significant benefit in cases where the comparison frequency is above 2 MHz. However, CSR can usually provide an equal or larger benefit in these cases, and can be implemented without using an additional resistor. The reason for this restriction on frequency is that Fastlock has a glitch when it is disengaged. As the time of engagement for Fastlock decreases and becomes on the order of the fast lock time, this glitch grows and limits the benefits of Fastlock. This effect becomes worse at higher comparison frequencies. There is always the option of reducing the comparison frequency at the expense of phase noise in order to satisfy this constraint on comparison frequency. Despite this glitch, there is still a net improvement in lock time using Fastlock in these circumstances. When using Fastlock, it is also recommended that the steady-state charge pump state be 4X or less. Also, Fastlock was originally intended only for second order filters, so when implementing it with higher order filters, the third and fourth poles can not be too close in, or it will not be possible to keep the loop filter well optimized when the higher charge pump current and Fastlock resistor are engaged.

#### 8.3.7.3 Using Cycle Slip Reduction (CSR) to Avoid Cycle Slipping


Once it is decided that CSR is to be used, the cycle slip reduction factor needs to be chosen. The available factors are 1/2, 1/4, and 1/16. In order to preserve the same loop characteristics, TI recommends that [Equation 4](#) be satisfied:

$$(\text{Fastlock Charge Pump Current}) / (\text{Steady-State Charge Pump Current}) = \text{CSR} \quad (4)$$

In order to satisfy this constraint, the maximum charge pump current in steady-state is 8X for a CSR of 1/2, 4X for a CSR of 1/4, and 1X for a CSR of 1/16. Because the PLL phase noise is better for higher charge pump currents, it makes sense to choose CSR only as large as necessary to prevent cycle slipping. Choosing it larger than this will not improve lock time, and will result in worse phase noise.

Consider an example where the desired loop bandwidth in steady-state is 100 kHz and the comparison frequency is 20 MHz. This yields a ratio of 200. Cycle slipping may be present, but would not be too severe if it was there. If a CSR factor of 1/2 is used, this would reduce the ratio to 100 during frequency acquisition, which is probably sufficient. A charge pump current of 8X could be used in steady-state, and a factor of 16X could be used during frequency acquisition. This yields a ratio of 1/2, which is equal to the CSR factor and this satisfies the above constraint. In this circumstance, it could also be decided to just use 16X charge pump current all the time, because it would probably have better phase noise, and the degradation in lock time would not be too severe.

#### 8.3.7.4 Using Fastlock to Improve Lock Times



**Figure 24. Loop Filter with Fastlock Resistor**

Once it is decided that Fastlock is to be used, the loop bandwidth multiplier, K, is needed in order to determine the theoretical impact of Fastlock on the loop bandwidth and the resistor value, R2p, that is switched in parallel during Fastlock. This ratio is calculated in [Equation 5](#):

$$K = (\text{Fastlock Charge Pump Current}) / (\text{Steady-State Charge Pump Current}) \quad (5)$$

**Table 8. Fastlock Usage**

| K  | LOOP BANDWIDTH | R2P VALUE | LOCK TIME |
|----|----------------|-----------|-----------|
| 1  | 1.00 X         | Open      | 100 %     |
| 2  | 1.41 X         | R2/0.41   | 71 %      |
| 3  | 1.73 X         | R2/0.73   | 58%       |
| 4  | 2.00 X         | R2        | 50%       |
| 8  | 2.83 X         | R2/1.83   | 35%       |
| 9  | 3.00 X         | R2/2      | 33%       |
| 16 | 4.00 X         | R2/3      | 25%       |

The above table shows how to calculate the Fastlock resistor and theoretical lock time improvement, once the ratio, K, is known. This all assumes a second order filter (not counting the pole at 0 Hz). However, it is generally recommended that the loop filter order be one greater than the order of the delta sigma modulator, which means that a second order filter is never recommended. In this case, the value for R2p is typically about 80% of what it would be for a second order filter. Because the Fastlock disengagement glitch gets larger and it is harder to keep the loop filter optimized as the K value becomes larger, designing for the largest possible value for K usually, but not always yields the best improvement in lock time. To get a more accurate estimate requires more simulation tools, or trial and error.

#### 8.3.7.5 Capacitor Dielectric Considerations for Lock Time

The LMX2485Q-Q1 has a high fractional modulus and high charge pump gain for the lowest possible phase noise. One consideration is that the reduced N value and higher charge pump may cause the capacitors in the loop filter to become larger in value. For larger capacitor values, it is common to have a trade-off between capacitor dielectric quality and physical size. Using film capacitors or NPO/COG capacitors yields the best possible lock times, where as using X7R or Z5R capacitors can increase lock time by 0 – 500%. However, it is a general tendency that designs that use a higher compare frequency tend to be less sensitive to the effects of capacitor dielectrics. Although the use of lesser quality dielectric capacitors may be unavoidable in many circumstances, allowing a larger footprint for the loop filter capacitors, using a lower charge pump current, and reducing the fractional modulus are all ways to reduce capacitor values. Capacitor dielectrics have very little impact on phase noise and spurs.



### 8.3.8 Fractional Spur and Phase Noise Controls

Control of the fractional spurs is more of an art than an exact science. The first differentiation that needs to be made is between primary fractional and sub-fractional spurs. The primary fractional spurs are those that occur at increments of the channel spacing only. The sub-fractional spurs are those that occur at a smaller resolution than the channel spacing, usually one-half or one-fourth. There are trade-offs between fractional spurs, sub-fractional spurs, and phase noise. The rules of thumb presented in this section are just that. There will be exceptions. The bits that impact the fractional spurs are FM and DITH, and these bits should be set in this order.

The first step to do is choose FM, for the delta sigma modulator order. TI recommends to start with FM = 3 for a third order modulator and use strong dithering. In general, there is a trade-off between primary and sub-fractional spurs. Choosing the highest order modulator (FM = 0 for 4th order) typically provides the best primary fractional spurs, but the worst sub-fractional spurs. Choosing the lowest modulator order (FM = 2 for 2nd order), typically gives the worst primary fractional spurs, but the best sub-fractional spurs. Choosing FM = 3, for a 3rd order modulator is a compromise.

The second step is to choose DITH, for dithering. Dithering has a very small impact on primary fractional spurs, but a much larger impact on sub-fractional spurs. The only problem is that it can add a few dB of phase noise, or even more if the loop bandwidth is very wide. Disabling dithering (DITH = 0), provides the best phase noise, but the sub-fractional spurs are worst (except when the fractional numerator is 0, and in this case, they are the best). Choosing strong dithering (DITH = 2) significantly reduces sub-fractional spurs, if not eliminating them completely, but adds the most phase noise. Weak dithering (DITH = 1) is a compromise.

The third step is to tinker with the fractional word. Although 1/10 and 400/4000 are mathematically the same, expressing fractions with much larger fractional numerators often improve the fractional spurs. Increasing the fractional denominator only improves spurs to a point. A good practical limit could be to keep the fractional denominator as large as possible, but not to exceed 4095, so it is not necessary to use the extended fractional numerator or denominator.

These steps can be done in different orders and it might take a few iterations to find the optimum performance. Special considerations should be taken for lower frequencies that are below about 100 MHz. In addition squaring up the wave, it is often helpful to use lowest terms fractions instead of highest terms fractions. Also, dithering may turn out to not be so useful. All the things are to introduce a methodical way of thinking about optimizing spurs, not an exact method. There will be exceptions to all these rules.

---

#### NOTE

For more information concerning delta-sigma PLLs, loop filter design, cycle slip reduction, Fastlock, and many other topics, visit [ti.com/wireless](http://ti.com/wireless). Here there is the EasyPLL simulation tool and an online reference called *PLL Performance, Simulation, and Design*.

---



## 8.4 Device Functional Modes

### 8.4.1 Power Pins, Power Down, and Power Up Modes

TI recommends that all of the power pins be filtered with a series 18-Ω resistor and then placing two capacitors shunt to ground, thus creating a low pass filter. Although it makes sense to use large capacitor values in theory, the ESR (Equivalent Series Resistance) is greater for larger capacitors. For optimal filtering minimize the sum of the ESR and theoretical impedance of the capacitor. It is therefore recommended to provide two capacitors of very different sizes for the best filtering. 1 μF and 100 pF are typical values. The small capacitor should be placed as close as possible to the pin.

The power down state of the LMX2485Q-Q1 is controlled by many factors. The one factor that overrides all other factors is the CE pin. If this pin is low, the part will be powered down. Asserting a high logic level on this pin is necessary to power up the chip, however, there are other bits in the programming registers that can override this and put the PLL back in a power down state. Provided that the voltage on the CE pin is high, programming the RF\_PD and IF\_PD bits to zero specifies that the part will be powered up. Programming either one of these bits to one will power down the appropriate section of the synthesizer, provided that the ATPU bit does not override this.

**Table 9. Powerdown Modes**

| CE Pin | RF_PD | ATPU<br>BIT ENABLED + N Counter Write | PLL STATE                      |
|--------|-------|---------------------------------------|--------------------------------|
| Low    | X     | X                                     | Powered Down<br>(Asynchronous) |
| High   | X     | Yes                                   | Powered Up                     |
| High   | 0     | No                                    | Powered Up                     |
| High   | 1     | No                                    | Powered Down<br>(Asynchronous) |

## 8.5 Programming

The 24-bit data registers are loaded through a MICROWIRE Interface. These data registers are used to program the R counter, the N counter, and the internal mode control latches. The data format of a typical 24-bit data register is shown below. The control bits CTL [3:0] decode the register address. On the rising edge of LE, data stored in the shift register is loaded into one of the appropriate latches (selected by address bits). Data is shifted in MSB first.

### NOTE

It is best to program the N counter last, because doing so initializes the digital lock detector and Fastlock circuitry. Note that initialize means it resets the counters, but it does NOT program values into these registers. The exception is when 22-bit is not being used. In this case, it is not necessary to program the R7 register.

**Table 10. Programming Format**

| MSB         |  |   |   | LSB       |  |   |   |
|-------------|--|---|---|-----------|--|---|---|
| DATA [21:0] |  |   |   | CTL [3:0] |  |   |   |
| 23          |  | 4 | 3 | 2         |  | 1 | 0 |

### 8.5.1 Register Location Truth Table

The control bits CTL [3:0] decode the internal register address. The table below shows how the control bits are mapped to the target control register.

**Table 11. Programmable Registers**

| C3 | C2 | C1 | C0 | DATA Location |
|----|----|----|----|---------------|
| x  | x  | x  | 0  | R0            |
| 0  | 0  | 1  | 1  | R1            |
| 0  | 1  | 0  | 1  | R2            |
| 0  | 1  | 1  | 1  | R3            |
| 1  | 0  | 0  | 1  | R4            |
| 1  | 0  | 1  | 1  | R5            |
| 1  | 1  | 0  | 1  | R6            |
| 1  | 1  | 1  | 1  | R7            |

## 8.5.2 Control Register Content Map

Because the LMX2485Q-Q1 registers are complicated, they are organized into two groups, basic and advanced. The first four registers are basic registers that contain critical information necessary for the PLL to achieve lock. The last 5 registers are for features that optimize spur, phase noise, and lock time performance. The next page shows these registers.

Although it is highly recommended that the user eventually take advantage of all the modes of the LMX2485, the quick start register map is shown in order for the user to get the part up and running quickly using only those bits critical for basic functionality. The following default conditions for this programming state are a third order delta-sigma modulator in 12-bit mode with no dithering and no Fastlock.

**Table 12. Quick Start Register Map**

| REGISTER | 23                                                         | 22         | 21        | 20 | 19 | 18          | 17 | 16 | 15          | 14         | 13 | 12 | 11          | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3  | 2  | 1  | 0  |  |  |
|----------|------------------------------------------------------------|------------|-----------|----|----|-------------|----|----|-------------|------------|----|----|-------------|----|---|---|---|---|---|---|----|----|----|----|--|--|
|          | DATA[19:0] (Except for the RF_N Register, which is [22:0]) |            |           |    |    |             |    |    |             |            |    |    |             |    |   |   |   |   |   |   | C3 | C2 | C1 | C0 |  |  |
| R0       | RF_N[10:0]                                                 |            |           |    |    |             |    |    |             |            |    |    | RF_FN[11:0] |    |   |   |   |   |   |   |    |    | 0  |    |  |  |
| R1       | RF_PD                                                      | RF_P       | RF_R[5:0] |    |    |             |    |    | RF_FD[11:0] |            |    |    |             |    |   |   |   |   |   |   | 0  | 0  | 1  | 1  |  |  |
| R2       | IF_PD                                                      | IF_N[18:0] |           |    |    |             |    |    |             |            |    |    |             |    |   |   |   |   |   |   | 0  | 1  | 0  | 1  |  |  |
| R3       | 0001                                                       |            |           |    |    | RF_CPG[3:0] |    |    |             | IF_R[11:0] |    |    |             |    |   |   |   |   |   |   | 0  | 1  | 1  | 1  |  |  |
| R4       | 0                                                          | 0          | 1         | 0  | 0  | 0           | 0  | 0  | 1           | 1          | 0  | 0  | 0           | 1  | 1 | 1 | 0 | 0 | 0 | 0 | 1  | 0  | 0  | 1  |  |  |

The complete register map shows all the functionality of all registers, including the last five.

**Table 13. Complete Register Map**

| REGISTER | 23                                                         | 22         | 21        | 20          | 19          | 18 | 17        | 16           | 15          | 14     | 13      | 12           | 11     | 10   | 9        | 8 | 7      | 6      | 5      | 4      | 3  | 2  | 1  | 0  |   |   |
|----------|------------------------------------------------------------|------------|-----------|-------------|-------------|----|-----------|--------------|-------------|--------|---------|--------------|--------|------|----------|---|--------|--------|--------|--------|----|----|----|----|---|---|
|          | DATA[19:0] (Except for the RF_N Register, which is [22:0]) |            |           |             |             |    |           |              |             |        |         |              |        |      |          |   |        |        |        |        | C3 | C2 | C1 | C0 |   |   |
| R0       | RF_N[10:0]                                                 |            |           |             |             |    |           |              |             |        |         | RF_FN[11:0]  |        |      |          |   |        |        |        |        |    |    |    |    |   |   |
| R1       | RF_PD                                                      | RF_P       | RF_R[5:0] |             |             |    |           |              | RF_FD[11:0] |        |         |              |        |      |          |   |        |        |        | 0      | 0  | 1  | 1  |    |   |   |
| R2       | IF_PD                                                      | IF_N[18:0] |           |             |             |    |           |              |             |        |         |              |        |      |          |   |        |        |        | 0      | 1  | 0  | 1  |    |   |   |
| R3       | ACCESS[3:0]                                                |            |           |             | RF_CPG[3:0] |    |           |              | IF_R[11:0]  |        |         |              |        |      |          |   |        |        |        | 0      | 1  | 1  | 1  |    |   |   |
| R4       | ATP_U                                                      | 0          | 1         | 0           | 0           | 0  | DITH[1:0] | FM[1:0]      | 0           | OSC_2X | OSC_OUT | IF_CPP       | RF_CPP | IF_P | MUX[3:0] |   |        |        | 1      | 0      | 0  | 1  |    |    |   |   |
| R5       | RF_FD[21:12]                                               |            |           |             |             |    |           |              |             |        |         | RF_FN[21:12] |        |      |          |   |        |        |        |        |    |    | 1  | 0  | 1 | 1 |
| R6       | CSR[1:0]                                                   |            |           | RF_CPF[3:0] |             |    |           | RF_TOC[13:0] |             |        |         |              |        |      |          |   |        |        |        | 1      | 1  | 0  | 1  |    |   |   |
| R7       | 0                                                          | 0          | 0         | 0           | 0           | 0  | 0         | 0            | 0           | 0      | DIV4    | 0            | 1      | 0    | 0        | 1 | IF_RST | RF_RST | IF_CPT | RF_CPT | 1  | 1  | 1  | 1  |   |   |

## 8.6 Register Maps

### 8.6.1 R0 Register

#### NOTE

This register has only one control bit, so the N counter value to be changed with a single write statement to the PLL.

**Figure 25. R0 Register**

|            |    |    |   |             |
|------------|----|----|---|-------------|
| 23         | 13 | 12 | 1 | 0           |
| RF_N[10:0] |    |    |   | RF_FN[11:0] |
|            |    |    |   | 0           |

**Table 14. R0 Register Field Descriptions**

| BIT   | FIELD       | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 23-13 | RF_N[10:0]  | RF N Counter Value<br>The RF N counter contains an 8/9/12/13 and a 16/17/20/21 prescaler. The N counter value can be calculated as follows:<br>$N = RF\_P \cdot RF\_C + 4 \cdot RF\_B + RF\_A$ $RF\_C \geq \text{Max}\{RF\_A, RF\_B\}$ , for $N - 2^{FM-1} \dots N + 2^{FM}$ is a necessary condition.<br>This rule is slightly modified in the case where the RF_B counter has an unused bit, where this extra bit is used by the delta-sigma modulator for the purposes of modulation. Consult the tables below for valid operating ranges for each prescaler. |
| 12-1  | RF_FN[11:0] | Fractional Numerator for RF PLL<br>Refer to <a href="#">Table 33</a> for a more detailed description of this control word.                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**Table 15. Operation with the 8/9/12/13 Prescaler (RF\_P=0)**

| RF_N  | RF_N [10:0]                                                    |   |   |   |   |   |            |   |            |   |   |
|-------|----------------------------------------------------------------|---|---|---|---|---|------------|---|------------|---|---|
|       | RF_C [6:0]                                                     |   |   |   |   |   | RF_B [1:0] |   | RF_A [1:0] |   |   |
| <25   | N values less than 25 are prohibited.                          |   |   |   |   |   |            |   |            |   |   |
| 25-26 | Possible only with a second order delta-sigma engine.          |   |   |   |   |   |            |   |            |   |   |
| 27-30 | Possible only with a second or third order delta-sigma engine. |   |   |   |   |   |            |   |            |   |   |
| 31    | 0                                                              | 0 | 0 | 0 | 0 | 1 | 1          | 0 | 1          | 1 | 1 |
| ...   | .                                                              | . | . | . | . | . | .          | 0 | .          | . | . |
| 1023  | 1                                                              | 1 | 1 | 1 | 1 | 1 | 1          | 0 | 1          | 1 | 1 |
| >1023 | N values above 1023 are prohibited.                            |   |   |   |   |   |            |   |            |   |   |

**Table 16. Operation with the 16/17/20/21 Prescaler (RF\_P=1)**

| RF_N      | RF_N [10:0]                                               |   |   |   |   |   |            |   |            |   |   |
|-----------|-----------------------------------------------------------|---|---|---|---|---|------------|---|------------|---|---|
|           | RF_C [6:0]                                                |   |   |   |   |   | RF_B [1:0] |   | RF_A [1:0] |   |   |
| <49       | N values less than 49 are prohibited.                     |   |   |   |   |   |            |   |            |   |   |
| 49-50     | Possible only with a second order delta-sigma engine.     |   |   |   |   |   |            |   |            |   |   |
| 51-54     | Possible with a second or third order delta-sigma engine. |   |   |   |   |   |            |   |            |   |   |
| 55        | 0                                                         | 0 | 0 | 0 | 0 | 1 | 1          | 0 | 1          | 1 | 1 |
| ...       | .                                                         | . | . | . | . | . | .          | . | .          | . | . |
| 2039      | 1                                                         | 1 | 1 | 1 | 1 | 1 | 1          | 0 | 1          | 1 | 1 |
| 2040-2043 | Possible with a second or third order delta-sigma engine. |   |   |   |   |   |            |   |            |   |   |
| 2044-2045 | Possible only with a second order delta-sigma engine.     |   |   |   |   |   |            |   |            |   |   |
| >2045     | N values greater than 2045 are prohibited.                |   |   |   |   |   |            |   |            |   |   |

## 8.6.2 R1 Register

**Figure 26. R1 Register**

| 23        | 22   | 21        | 16 | 15 | 4           | 3 | 2 | 1 | 0 |   |   |
|-----------|------|-----------|----|----|-------------|---|---|---|---|---|---|
| RF_P<br>D | RF_P | RF_R[5:0] |    |    | RF_FD[11:0] |   |   | 0 | 0 | 1 | 1 |

**Table 17. R1 Register Field Descriptions**

| BIT   | FIELD       | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 23    | RF_PD       | RF Power Down Control Bit<br>When this bit is set to 0, the RF PLL operates normally. When it is set to one, the RF PLL is powered down and the RF Charge pump is set to a TRI-STATE mode. The CE pin and ATPU bit also control power down functions, and will override the RF_PD bit. The order of precedence is as follows. First, if the CE pin is LOW, then the PLL will be powered down. Provided this is not the case, the PLL will be powered up if the ATPU bit says to do so, regardless of the state of the RF_PD bit. After the CE pin and the ATPU bit are considered, then the RF_PD bit then takes control of the power down function for the RF PLL. |
| 22    | RF_P        | RF Prescaler bit<br>The prescaler used is determined by this bit.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 21-16 | RF_R[5:0]   | RF R Divider Value<br>The RF R Counter value is determined by this control word. Note that this counter does allow values down to one.<br>The RF R Counter value is determined by this control word. Note that this counter does allow values down to one.                                                                                                                                                                                                                                                                                                                                                                                                          |
| 15-4  | RF_FD[11:0] | RF PLL Fractional Denominator<br>The function of these bits are described in <a href="#">Table 34</a> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

**Table 18. RF\_R [5:0] -- RF R Divider Value**

| R Value | RF_R[5:0] |   |   |   |   |   |
|---------|-----------|---|---|---|---|---|
| 1       | 0         | 0 | 0 | 0 | 0 | 1 |
| ...     | .         | . | . | . | . | . |
| 63      | 1         | 1 | 1 | 1 | 1 | 1 |

### Table 19. RF\_P -- RF Prescaler Bit

| RF_P | PRESCALER   | MAXIMUM FREQUENCY |
|------|-------------|-------------------|
| 0    | 8/9/12/13   | 2000 MHz          |
| 1    | 16/17/20/21 | 3000 MHz          |

### 8.6.3 R2 Register

### Figure 27. R2 Register

|       |            |   |   |   |   |   |
|-------|------------|---|---|---|---|---|
| 23    | 22         | 4 | 3 | 2 | 1 | 0 |
| IF_PD | IF_N[18:0] | 0 | 1 | 0 | 1 |   |

### Table 20. R2 Register Field Descriptions

| BIT  | FIELD      | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 23   | IF_PD      | <p>IF Power Down Bit</p> <p>When this bit is set to 0, the IF PLL operates normally. When it is set to 1, the IF PLL powers down and the output of the IF PLL charge pump is set to a TRI-STATE mode. If the ATPU bit is set and register R0 is written to, the IF_PD will be reset to 0 and the IF PLL will be powered up. If the CE pin is held low, the IF PLL will be powered down, overriding the IF_PD bit.</p> |
| 22-4 | IF_N[18:0] | IF N Divider Value                                                                                                                                                                                                                                                                                                                                                                                                    |

**Table 21. IF\_N Counter Programming With the 8/9 Prescaler (IF\_P=0)**

| N<br>VALUE | IF_N[18:0]                                                                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |      |   |   |   |
|------------|--------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|------|---|---|---|
|            | IF_B                                                                           |   |   |   |   |   |   |   |   |   |   |   |   |   |   | IF_A |   |   |   |
| ≤23        | N values less than or equal to 23 are prohibited because IF_B ≥ 3 is required. |   |   |   |   |   |   |   |   |   |   |   |   |   |   |      |   |   |   |
| 24-55      | Legal divide ratios in this range are:<br>24-27, 32-36, 40-45, 48-54           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |      |   |   |   |
| 56         | 0                                                                              | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0    | 0 | 0 | 0 |
| 57         | 0                                                                              | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 0    | 0 | 0 | 1 |
| ...        | .                                                                              | . | . | . | . | . | . | . | . | . | . | . | . | . | . | .    | . | . | . |
| 262143     | 1                                                                              | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0    | 1 | 1 | 1 |

**Table 22. Operation With the 16/17 Prescaler (IF\_P=1)**

[illegible]

## 8.6.4 R3 Register

**Figure 28. R3 Register**

|             |    |    |    |             |   |   |   |            |   |
|-------------|----|----|----|-------------|---|---|---|------------|---|
| 23          | 20 | 19 | 16 | 15          | 4 | 3 | 2 | 1          | 0 |
| ACCESS[3:0] |    |    |    | RF_CPG[3:0] |   |   |   | IF_R[11:0] |   |
|             |    |    |    |             |   |   |   | 0          | 1 |
|             |    |    |    |             |   |   |   | 1          | 0 |

**Table 23. R3 Register Field Descriptions**

| BIT   | FIELD       | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 23-20 | ACCESS[3:0] | Register Access word<br>It is mandatory that the first 5 registers R0-R4 be programmed. The programming of registers R5-R7 is optional. The ACCESS[3:0] bits determine which additional registers need to be programmed. Any one of these registers can be individually programmed. According to the table below, when the state of a register is in default mode, all the bits in that register are forced to a default state and it is not necessary to program this register. When the register is programmable, it needs to be programmed through the MICROWIRE. Using this register access technique, the programming required is reduced up to 37%. |
| 19-16 | RF_CPG[3:0] | RF PLL Charge Pump Gain<br>This is used to control the magnitude of the RF PLL charge pump in steady-state operation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 15-4  | IF_R[11:0]  | IF R Divider Value<br>For the IF R divider, the R value is determined by the IF_R[11:0] bits in the R3 register. The minimum value for IF_R is 3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

**Table 24. IF\_R[11:0] -- IF R Divider Value**

| R<br>VALUE | IF_R[11:0] |   |   |   |   |   |   |   |   |   |   |   |
|------------|------------|---|---|---|---|---|---|---|---|---|---|---|
| 3          | 0          | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| ...        | .          | . | . | . | . | . | . | . | . | . | . | . |
| 4095       | 1          | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

**Table 25. RF\_CPG -- RF PLL Charge Pump Gain**

| RF_CPG | CHARGE PUMP STATE | TYPICAL RF CHARGE PUMP CURRENT<br>AT 3 VOLTS (µA) |
|--------|-------------------|---------------------------------------------------|
| 0      | 1X                | 95                                                |
| 1      | 2X                | 190                                               |
| 2      | 3X                | 285                                               |
| 3      | 4X                | 380                                               |
| 4      | 5X                | 475                                               |
| 5      | 6X                | 570                                               |
| 6      | 7X                | 665                                               |
| 7      | 8X                | 760                                               |
| 8      | 9X                | 855                                               |
| 9      | 10X               | 950                                               |
| 10     | 11X               | 1045                                              |
| 11     | 12X               | 1140                                              |
| 12     | 13X               | 1235                                              |
| 13     | 14X               | 1330                                              |
| 14     | 15X               | 1425                                              |
| 15     | 16X               | 1520                                              |

**Table 26. ACCESS -- Register Access word**

| ACCESS BIT | REGISTER LOCATION | REGISTER CONTROLLED |
|------------|-------------------|---------------------|
| ACCESS[0]  | R3[20]            | Must be set to 1    |
| ACCESS[1]  | R3[21]            | R5                  |
| ACCESS[2]  | R3[22]            | R6                  |
| ACCESS[3]  | R3[23]            | R7                  |

The default conditions the registers is shown below:

**Table 27. Default Register States**

| REGISTER | 23                              | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3  | 2  | 1  | 0  |
|----------|---------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|----|----|----|----|
|          | Data[19:0]                      |    |    |    |    |    |    |    |    |    |    |    |    |    |   |   |   |   |   |   | C3 | C2 | C1 | C0 |
| R4       | R4 Must be programmed manually. |    |    |    |    |    |    |    |    |    |    |    |    |    |   |   |   |   |   |   |    |    |    |    |
| R5       | 0                               | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 1  | 0  | 1  | 1  |
| R6       | 0                               | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 1  | 1  | 0  | 1  |
| R7       | 0                               | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0 | 1 | 0 | 0 | 0 | 0 | 1  | 1  | 1  | 1  |

This corresponds to the following bit settings.

**Table 28. Default Programmable States**

| REGISTER | BIT LOCATION | BIT NAME     | BIT DESCRIPTION                 | BIT VALUE | BIT STATE                 |
|----------|--------------|--------------|---------------------------------|-----------|---------------------------|
| R4       | R4[23]       | ATPU         | Autopowerup                     | 0         | Disabled                  |
|          | R4[17:16]    | DITH         | Dithering                       | 2         | Strong                    |
|          | R4[15:14]    | FM           | Modulation Order                | 3         | 3rd Order                 |
|          | R4[12]       | OSC_2X       | Oscillator Doubler              | 0         | Disabled                  |
|          | R4[11]       | OSC_OUT      | OSCOut Pin Enable               | 0         | Disabled                  |
|          | R4[10]       | IF_CPP       | IF Charge Pump Polarity         | 1         | Positive                  |
|          | R4[9]        | RF_CPP       | RF Charge Pump Polarity         | 1         | Positive                  |
|          | R4[8]        | IF_P         | IF PLL Prescaler                | 1         | 16/17                     |
|          | R4[7:4]      | MUX          | Ftest/LD Output                 | 0         | Disabled                  |
| R5       | R5[23:14]    | RF_FD[21:12] | Extended Fractional Denominator | 0         | Disabled                  |
|          | R5[13:4]     | RF_FN[21:12] | Extended Fractional Numerator   | 0         | Disabled                  |
| R6       | R6[23:22]    | CSR          | Cycle Slip Reduction            | 0         | Disabled                  |
|          | R6[21:18]    | RF_CPF       | Fastlock Charge Pump Current    | 0         | Disabled                  |
|          | R6[17:4]     | RF_TOC       | RF Timeout Counter              | 0         | Disabled                  |
| R7       | R7[13]       | DIV4         | Lock Detect Adjustment          | 0         | Disabled (Fcomp ≤ 20 MHz) |
|          | R7[7]        | IF_RST       | IF PLL Counter Reset            | 0         | Disabled                  |
|          | R7[6]        | RF_RST       | RF PLL Counter Reset            | 0         | Disabled                  |
|          | R7[5]        | IF_CPT       | IF PLL Tri-State                | 0         | Disabled                  |
|          | R7[4]        | RF_CPT       | RF PLL Tri-State                | 0         | Disabled                  |



## 8.6.5 R4 Register

This register controls the conditions for the RF PLL in Fastlock.

**Figure 29. R4 Register**

|         |        |        |      |    |          |           |    |         |    |    |        |
|---------|--------|--------|------|----|----------|-----------|----|---------|----|----|--------|
| 23      | 22     | 21     | 20   | 19 | 18       | 17        | 16 | 15      | 14 | 13 | 12     |
| ATPU    | 0      | 1      | 0    | 0  | 0        | DITH[1:0] |    | FM[1:0] |    | 0  | OSC_2X |
| 11      | 10     | 9      | 8    | 7  |          |           | 4  | 3       | 2  | 1  | 0      |
| OSC_OUT | IF_CPP | RF_CPP | IF_P |    | MUX[3:0] |           |    | 1       | 0  | 0  | 1      |

**Table 29. R4 Register Field Descriptions**

| BIT   | FIELD     | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 23    | ATPU      | <p>PLL Automatic Power Up</p> <p>When this bit is set to 1, both the RF and IF PLL power up when the R0 register is written to. When the R0 register is written to, the PD_RF and PD_IF bits are changed to 0 in the PLL registers. The exception to this case is when the CE pin is low. In this case, the ATPU function is disabled.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 17-16 | DITH[1:0] | <p>Dithering Control</p> <p>Dithering is a technique used to spread out the spur energy. Enabling dithering can reduce the main fractional spurs, but can also give rise to a family of smaller spurs. Whether dithering helps or hurts is application specific. Enabling the dithering may also increase the phase noise. In most cases where the fractional numerator is zero, dithering usually degrades performance.</p> <p>Dithering tends to be most beneficial in applications where there is insufficient filtering of the spurs. This often occurs when the loop bandwidth is very wide or a higher order delta-sigma modulator is used. Dithering tends not to impact the main fractional spurs much, but has a much larger impact on the sub-fractional spurs. If it is decided that dithering will be used, best results will be obtained when the fractional denominator is at least 1000.</p> <p>0 = Disabled<br/>1 = Weak Dithering<br/>2 = Strong Dithering<br/>3 = Reserved</p> |
| 15-14 | FM[1:0]   | <p>Fractional Mode</p> <p>Determines the order of the delta-sigma modulator. Higher order delta-sigma modulators reduce the spur levels closer to the carrier by pushing this noise to higher frequency offsets from the carrier. In general, the order of the loop filter should be at least one greater than the order of the delta-sigma modulator in order to allow for sufficient roll-off.</p> <p>0 = Fractional PLL mode with a 4th order delta-sigma modulator<br/>1 = Disable the delta-sigma modulator. Recommended for test use only.<br/>2 = Fractional PLL mode with a 2nd order delta-sigma modulator<br/>3 = Fractional PLL mode with a 3rd order delta-sigma modulator</p>                                                                                                                                                                                                                                                                                                       |
| 12    | OSC_2X    | <p>Oscillator Doubler Enable</p> <p>When this bit is set to 0, the oscillator doubler is disabled and the TCXO frequency presented to the IF R and RF R counters is equal to that of the input frequency of the OSCin pin. When this bit is set to 1, the TCXO frequency presented to the RF R counter is doubled. Phase noise added by the doubler is negligible.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 11    | OSC_OUT   | <p>Oscillator Output Buffer Enable</p> <p>0 = Disabled (High Impedance)<br/>1 = Buffered output of OSCin pin</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 10    | IF_CPP    | <p>IF PLL Charge Pump Polarity</p> <p>For a positive phase detector polarity, which is normally the case, set this bit to 1. Otherwise set this bit for a negative phase detector polarity.</p> <p>0 = Negative<br/>1 = Positive</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

**Table 29. R4 Register Field Descriptions (continued)**

| BIT | FIELD    | DESCRIPTION                                                                                                  |
|-----|----------|--------------------------------------------------------------------------------------------------------------|
| 9   | RF_CPP   | RF PLL Charge Pump Polarity<br>0 = Negative<br>1 = Positive (Default)                                        |
| 8   | IF_P     | IF Prescaler<br>When this bit is set to 0, the 8/9 prescaler is used. Otherwise the 16/17 prescaler is used. |
| 7-4 | MUX[3:0] | Frequency Out & Lock Detect MUX<br>These bits determine the output state of the Ftest/LD pin.                |

**Table 30. MUX[3:0] Frequency Out & Lock Detect MUX**

| MUX[3:0] |   |   |   | OUTPUT TYPE    | OUTPUT DESCRIPTION                           |
|----------|---|---|---|----------------|----------------------------------------------|
| 0        | 0 | 0 | 0 | High Impedance | Disabled                                     |
| 0        | 0 | 0 | 1 | Push-Pull      | General-purpose output, Logical "High" State |
| 0        | 0 | 1 | 0 | Push-Pull      | General-purpose output, Logical "Low" State  |
| 0        | 0 | 1 | 1 | Push-Pull      | RF & IF Digital Lock Detect                  |
| 0        | 1 | 0 | 0 | Push-Pull      | RF Digital Lock Detect                       |
| 0        | 1 | 0 | 1 | Push-Pull      | IF Digital Lock Detect                       |
| 0        | 1 | 1 | 0 | Open Drain     | RF & IF Analog Lock Detect                   |
| 0        | 1 | 1 | 1 | Open Drain     | RF Analog Lock Detect                        |
| 1        | 0 | 0 | 0 | Open Drain     | IF Analog Lock Detect                        |
| 1        | 0 | 0 | 1 | Push-Pull      | RF & IF Analog Lock Detect                   |
| 1        | 0 | 1 | 0 | Push-Pull      | RF Analog Lock Detect                        |
| 1        | 0 | 1 | 1 | Push-Pull      | IF Analog Lock Detect                        |
| 1        | 1 | 0 | 0 | Push-Pull      | IF R Divider divided by 2                    |
| 1        | 1 | 0 | 1 | Push-Pull      | IF N Divider divided by 2                    |
| 1        | 1 | 1 | 0 | Push-Pull      | RF R Divider divided by 2                    |
| 1        | 1 | 1 | 1 | Push-Pull      | RF N Divider divided by 2                    |

**Table 31. IF\_P -- IF Prescaler**

| IF_P | IF PRESCALER | MAXIMUM FREQUENCY |
|------|--------------|-------------------|
| 0    | 8/9          | 800 MHz           |
| 1    | 16/17        | 800 MHz           |

**Table 32. OSC2X -- Oscillator Doubler Enable**

| OSC2X | FREQUENCY PRESENTED TO RF R COUNTER | FREQUENCY PRESENTED TO IF R COUNTER |
|-------|-------------------------------------|-------------------------------------|
| 0     | $f_{\text{OSCIN}}$                  | $f_{\text{OSCIN}}$                  |
| 1     | $2 \times f_{\text{OSCIN}}$         |                                     |

## 8.6.6 R5 Register

**Figure 30. R5 Register**

|              |    |    |   |              |   |   |   |
|--------------|----|----|---|--------------|---|---|---|
| 23           | 14 | 13 | 4 | 3            | 2 | 1 | 0 |
| RF_FD[21:12] |    |    |   | RF_FN[21:12] |   |   |   |
|              |    |    |   |              | 1 | 0 | 1 |
|              |    |    |   |              |   |   | 1 |

In the case that the ACCESS[1] bit is 0, then the part operates in 12-bit fractional mode, and the RF\_FN2[21:12] bits become do not care bits. When the ACCESS[1] bit is set to 1, the part operates in 22-bit mode and the fractional numerator is expanded from 12 to 22-bits.

**Table 33. Fractional Numerator Determination { RF\_FN[21:12], RF\_FN[11:0], ACCESS[1] }**

| FRACTIONAL<br>NUMERATOR | RF_FN[21:12]<br>(These bits only apply in 22-bit mode)                                                       |   |   |   |   |   |   |   |   |   |   | RF_FN[11:0] |   |   |   |   |   |   |   |   |   |   |
|-------------------------|--------------------------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|---|-------------|---|---|---|---|---|---|---|---|---|---|
| 0                       | In 12-bit mode, these are do not care.<br>In 22-bit mode, for N <4096,<br>these bits should be all set to 0. |   |   |   |   |   |   |   |   |   |   | 0           | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1                       |                                                                                                              |   |   |   |   |   |   |   |   |   |   | 0           | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| ...                     |                                                                                                              |   |   |   |   |   |   |   |   |   |   | .           | . | . | . | . | . | . | . | . | . | . |
| 4095                    |                                                                                                              |   |   |   |   |   |   |   |   |   |   | 1           | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 4096                    | 0                                                                                                            | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0           | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| ...                     | .                                                                                                            | . | . | . | . | . | . | . | . | . | . | .           | . | . | . | . | . | . | . | . | . | . |
| 4194303                 | 1                                                                                                            | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1           | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

In the case that the ACCESS[1] bit is 0, then the part is operates in the 12-bit fractional mode, and the RF\_FD[21:12] bits become do not care bits. When the ACCESS[1] is set to 1, the part operates in 22-bit mode and the fractional denominator is expanded from 12 to 22-bits.

**Table 34. Fractional Denominator Determination { RF\_FD[21:12], RF\_FD[11:0], ACCESS[1]}**

| FRACTIONAL<br>DENOMINAT<br>OR | RF_FD[21:12]<br>(These bits only apply in 22-bit mode)                                                       |   |   |   |   |   |   |   |   |   |   | RF_FD[11:0] |   |   |   |   |   |   |   |   |   |   |
|-------------------------------|--------------------------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|---|-------------|---|---|---|---|---|---|---|---|---|---|
| 0                             | In 12-bit mode, these are do not care.<br>In 22-bit mode, for N <4096,<br>these bits should be all set to 0. |   |   |   |   |   |   |   |   |   |   | 0           | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1                             |                                                                                                              |   |   |   |   |   |   |   |   |   |   | 0           | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| ...                           |                                                                                                              |   |   |   |   |   |   |   |   |   |   | .           | . | . | . | . | . | . | . | . | . | . |
| 4095                          |                                                                                                              |   |   |   |   |   |   |   |   |   |   | 1           | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 4096                          | 0                                                                                                            | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0           | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| ...                           | .                                                                                                            | . | . | . | . | . | . | . | . | . | . | .           | . | . | . | . | . | . | . | . | . | . |
| 4194303                       | 1                                                                                                            | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1           | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

## 8.6.7 R6 Register

**Figure 31. R6 Register**

|          |             |              |    |    |   |   |   |   |   |
|----------|-------------|--------------|----|----|---|---|---|---|---|
| 23       | 22          | 21           | 18 | 17 | 4 | 3 | 2 | 1 | 0 |
| CSR[1:0] | RF_CPF[3:0] | RF_TOC[13:0] |    |    |   | 1 | 1 | 0 | 1 |

**Table 35. R6 Register Field Descriptions**

| BIT   | FIELD        | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 23-22 | CSR[1:0]     | RF Cycle Slip Reduction<br>CSR controls the operation of the Cycle Slip Reduction Circuit. This circuit can be used to reduce the occurrence of phase detector cycle slips. Note that the Fastlock charge pump current, steady-state current, and CSR control are all interrelated. Refer to <a href="#">Cycle Slip Reduction and Fastlock</a> for information on how to use this.                                                                                                                                                                                                                                                                                       |
| 21-18 | RF_CPF[3:0]  | RF PLL Fastlock Charge Pump Current<br>Specify the charge pump current for the Fastlock operation mode for the RF PLL. Note that the Fastlock charge pump current, steady-state current, and CSR control are all interrelated.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 17-4  | RF_TOC[13:0] | RF Time Out Counter and Control for FLoutRF Pin<br>The RF_TOC[13:0] word controls the operation of the RF Fastlock circuitry as well as the function of the FLoutRF output pin. When this word is set to a value between 0 and 3, the RF Fastlock circuitry is disabled and the FLoutRF pin operates as a general-purpose CMOS TRI-STATE I/O. When RF_TOC is set to a value between 4 and 16383, the RF Fastlock mode is enabled and the FLoutRF pin is utilized as the RF Fastlock output pin. The value programmed into the RF_TOC[13:0] word represents two times the number of phase detector comparison cycles the RF synthesizer will spend in the Fastlock state. |

**Table 36. RF\_TOC -- RF Time Out Counter and Control for FLoutRF Pin**

| RF_TOC | FASTLOCK MODE | Fastlock Period [CP events] | FLoutRF PIN FUNCTIONALITY                        |
|--------|---------------|-----------------------------|--------------------------------------------------|
| 0      | Disabled      | N/A                         | High Impedance                                   |
| 1      | Manual        | N/A                         | Logic 0 State.<br>Forces all Fastlock conditions |
| 2      | Disabled      | N/A                         | Logic 0 State                                    |
| 3      | Disabled      | N/A                         | Logic 1 State                                    |
| 4      | Enabled       | 4X2 = 8                     | Fastlock                                         |
| 5      | Enabled       | 5X2 = 10                    | Fastlock                                         |
| ...    | Enabled       | ...                         | Fastlock                                         |
| 16383  | Enabled       | 16383X2 = 32766             | Fastlock                                         |

**Table 37. RF\_CPF -- RF PLL Fastlock Charge Pump Current**

| RF_CPF | RF CHARGE PUMP STATE | TYPICAL RF CHARGE PUMP CURRENT AT 3 VOLTS (μA) |
|--------|----------------------|------------------------------------------------|
| 0      | 1X                   | 95                                             |
| 1      | 2X                   | 190                                            |
| 2      | 3X                   | 285                                            |
| 3      | 4X                   | 380                                            |
| 4      | 5X                   | 475                                            |
| 5      | 6X                   | 570                                            |
| 6      | 7X                   | 665                                            |
| 7      | 8X                   | 760                                            |
| 8      | 9X                   | 855                                            |
| 9      | 10X                  | 950                                            |
| 10     | 11X                  | 1045                                           |
| 11     | 12X                  | 1140                                           |
| 12     | 13X                  | 1235                                           |
| 13     | 14X                  | 1330                                           |
| 14     | 15X                  | 1425                                           |
| 15     | 16X                  | 1520                                           |

**Table 38. CSR[1:0] -- RF Cycle Slip Reduction**

| CSR | CSR STATE | SAMPLE RATE REDUCTION FACTOR |
|-----|-----------|------------------------------|
| 0   | Disabled  | 1                            |
| 1   | Enabled   | 1/2                          |
| 2   | Enabled   | 1/4                          |
| 3   | Enabled   | 1/16                         |

## 8.6.8 R7 Register

**Figure 32. R7 Register**

|        |        |        |        |    |    |    |    |
|--------|--------|--------|--------|----|----|----|----|
| 23     | 22     | 21     | 20     | 19 | 18 | 17 | 16 |
| 0      | 0      | 0      | 0      | 0  | 0  | 0  | 0  |
| 15     | 14     | 13     | 12     | 11 | 10 | 9  | 8  |
| 0      | 0      | DIV4   | 0      | 1  | 0  | 0  | 1  |
| 7      | 6      | 5      | 4      | 3  | 2  | 1  | 0  |
| IF_RST | RF_RST | IF_CPT | RF_CPT | 1  | 1  | 1  | 1  |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 39. R7 Register Field Descriptions**

| BIT | FIELD  | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 13  | DIV4   | RF Digital Lock Detect Divide By 4<br>Because the digital lock detect function is based on a phase error, it becomes more difficult to detect a locked condition for larger comparison frequencies. When this bit is enabled, it subdivides the RF PLL comparison frequency (it does not apply to the IF comparison frequency) presented to the digital lock detect circuitry by 4. This enables this circuitry to work at higher comparison frequencies. TI recommends that this bit be enabled whenever the comparison frequency exceeds 20 MHz and RF digital lock detect is being used. |
| 7   | IF_RST | IF PLL Counter Reset<br>When this bit is enabled, the IF PLL N and R counters are reset, and the charge pump is put in a Tri-State condition. This feature should be disabled for normal operation. Note that a counter reset is applied whenever the chip is powered up through software or CE pin.                                                                                                                                                                                                                                                                                        |
| 6   | RF_RST | RF PLL Counter Reset<br>When this bit is enabled, the RF PLL N and R counters are reset and the charge pump is put in a Tri-State condition. This feature should be disabled for normal operation. This feature should be disabled for normal operation. Note that a counter reset is applied whenever the chip is powered up through software or CE pin.                                                                                                                                                                                                                                   |
| 5   | IF_CPT | IF Charge Pump Tri-State<br>When this bit is enabled, the IF PLL charge pump is put in a Tri-State condition, but the counters are not reset. This feature is typically disabled for normal operation.                                                                                                                                                                                                                                                                                                                                                                                      |
| 4   | RF_CPT | RF Charge Pump Tri-State<br>When this bit is enabled, the RF PLL charge pump is put in a Tri-State condition, but the counters are not reset. This feature is typically disabled for normal operation.                                                                                                                                                                                                                                                                                                                                                                                      |

**Table 40. RF\_RST - IF PLL Counter Reset**

| IF_RST      | IF PLL N AND R COUNTERS | IF PLL CHARGE PUMP |
|-------------|-------------------------|--------------------|
| 0 (Default) | Normal Operation        | Normal Operation   |
| 1           | Counter Reset           | Tri-State          |

**Table 41. RF\_RST -- RF PLL Counter Reset**

| RF_RST      | RF PLL N AND R COUNTERS | RF PLL CHARGE PUMP |
|-------------|-------------------------|--------------------|
| 0 (Default) | Normal Operation        | Normal Operation   |
| 1           | Counter Reset           | Tri-State          |

**Table 42. RF\_TRI -- RF Charge Pump Tri-State**

| RF_TRI      | RF PLL N AND R COUNTERS | RF PLL CHARGE PUMP |
|-------------|-------------------------|--------------------|
| 0 (Default) | Normal Operation        | Normal Operation   |
| 1           | Normal Operation        | Tri-State          |

**Table 43. IF\_TRI -- IF Charge Pump Tri-State**

| IF_TRI      | IF PLL N AND R COUNTERS | IF PLL CHARGE PUMP |
|-------------|-------------------------|--------------------|
| 0 (Default) | Normal Operation        | Normal Operation   |
| 1           | Normal Operation        | Tri-State          |

## 9 Application and Implementation

---

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

---

### 9.1 Application Information

This device ideal for use in a broad class of applications, especially those requiring low current consumption and low fractional spurs. For applications that only need a single PLL, the unused PLL can be powered down and will not draw any extra current or generate any spurs or crosstalk. The automotive qualification on this device makes it ideal for automotive applications.



## 9.2 Typical Application

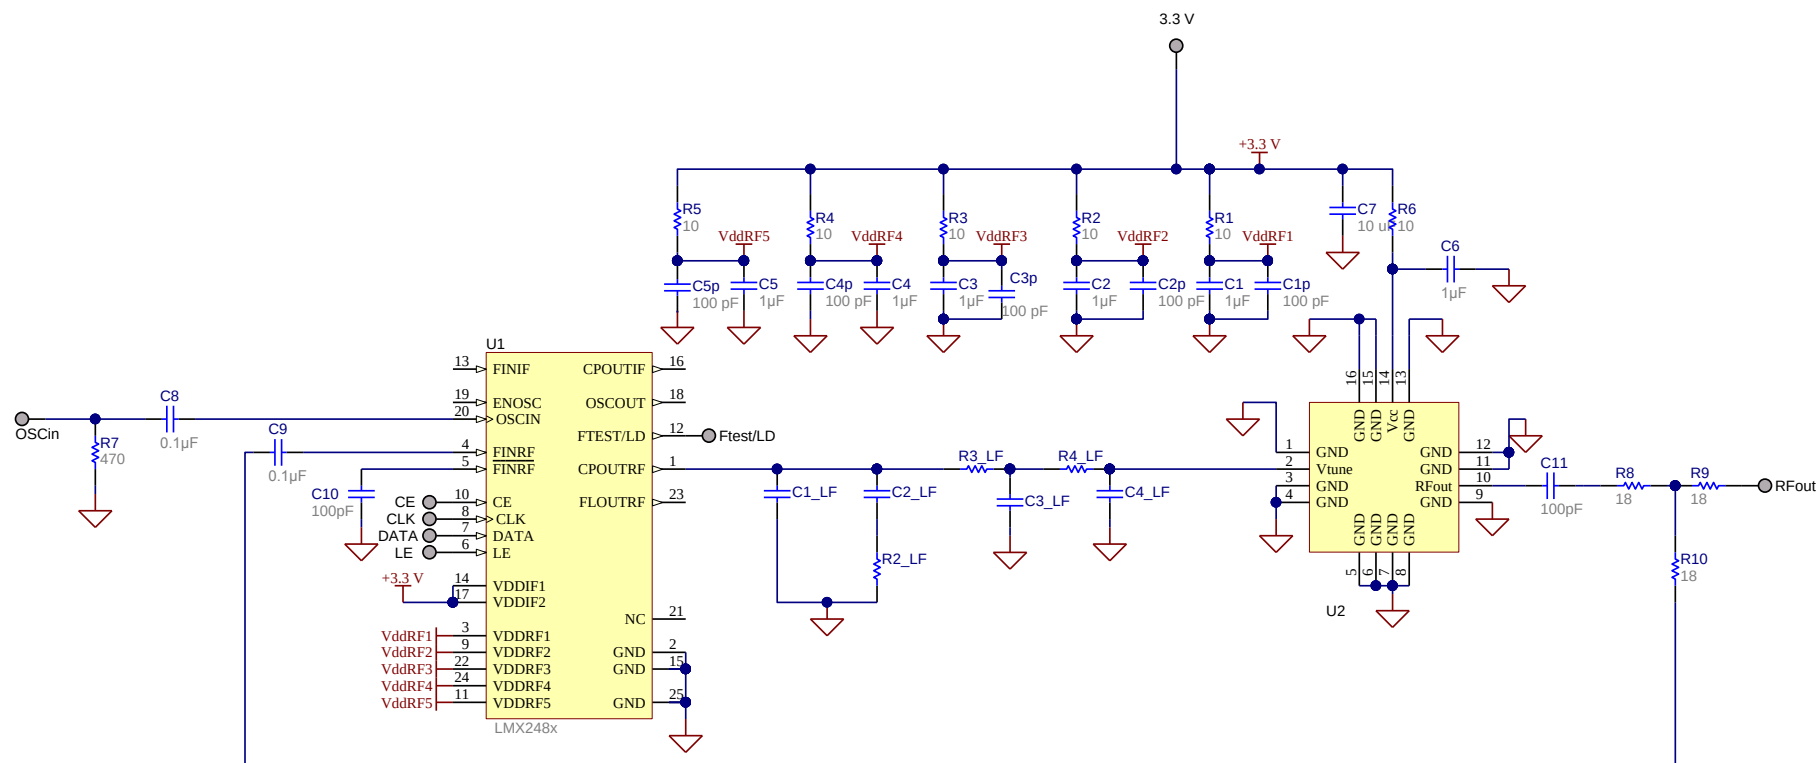


Figure 33. Typical Application With Only One Side Used

## LMX2485Q-Q1

SNOSCP7A – MARCH 2013 – REVISED JANUARY 2016

www.ti.com

### 9.2.1 Design Requirements

Table 44 lists the design parameters of the LMX2485Q-Q1.

Table 44. Design Parameters

| PARAMETER        |                          | VALUE           |
|------------------|--------------------------|-----------------|
| PM               | Phase Margin             | 48.3 degrees    |
| BW               | Loop Bandwidth           | 11.3 KHz        |
| T3/T1            | Pole Ratio               | 40.20%          |
| T4/T3            |                          | 36.30%          |
| K <sub>PD</sub>  | Charge Pump Gain         | 400 $\mu$ A     |
| f <sub>PD</sub>  | Phase Detector Frequency | 10 MHz          |
| f <sub>VCO</sub> | VCO Frequency            | 2400 – 2480 MHz |
| V <sub>CC</sub>  | Supply Voltage           | 3 V             |
| K <sub>VCO</sub> | VCO Gain                 | 55 MHz/V        |
| C <sub>VCO</sub> | VCO Input Capacitance    | 22 pF           |
| C1_LF            | Loop Filter Components   | 2.7 nF          |
| C2_LF            |                          | 47 nF           |
| C3_LF            |                          | 270 pF          |
| C4_LF            |                          | 180 pF          |
| R2_LF            |                          | 820 $\Omega$    |
| R3_LF            |                          | 3.9 k $\Omega$  |
| R4_LF            |                          | 5.6 k $\Omega$  |

### 9.2.2 Detailed Design Procedure

The design of the loop filter involves balancing requirements of lock time, spurs, and phase noise. This design is fairly involved, but the TI website has references, design tools, and simulation tools cover the loop filter design and simulation in depth.

### 9.2.3 Application Curves

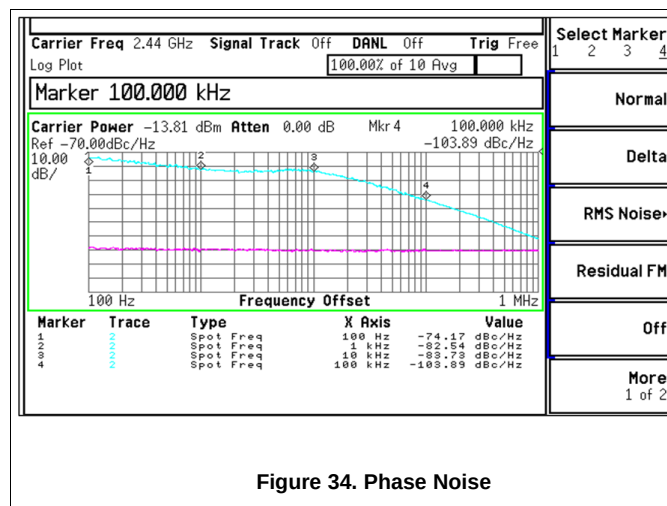


Figure 34. Phase Noise

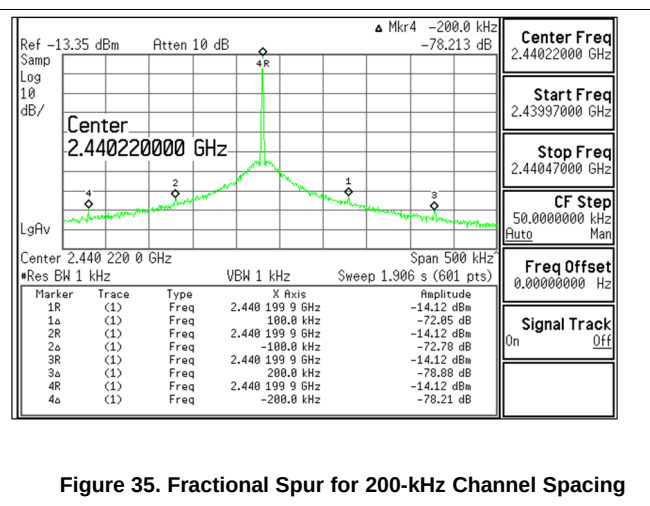


Figure 35. Fractional Spur for 200-kHz Channel Spacing

## 10 Power Supply Recommendations


Low noise regulators are generally recommended for the supply pins. It is OK to have one regulator supply the part, although it is best to put individual bypassing as shown in the Layout Guidelines for the best spur performance. If only using one PLL and not both DO NOT DISCONNECT OR GROUND power pins! For instance, the IF PLL supply pins also supply other blocks than just the IF PLL and they need to be connected. However, if the IF PLL is disabled, then one can eliminate all bypass capacitors from these pins.

## 11 Layout

### 11.1 Layout Guidelines

The critical pin is the high-frequency input pin that should have a short trace. In general, try to keep the ground and power planes 20 mils or more farther away from vias to supply pins to ensure that no spur energy can couple to them.

### 11.2 Layout Example

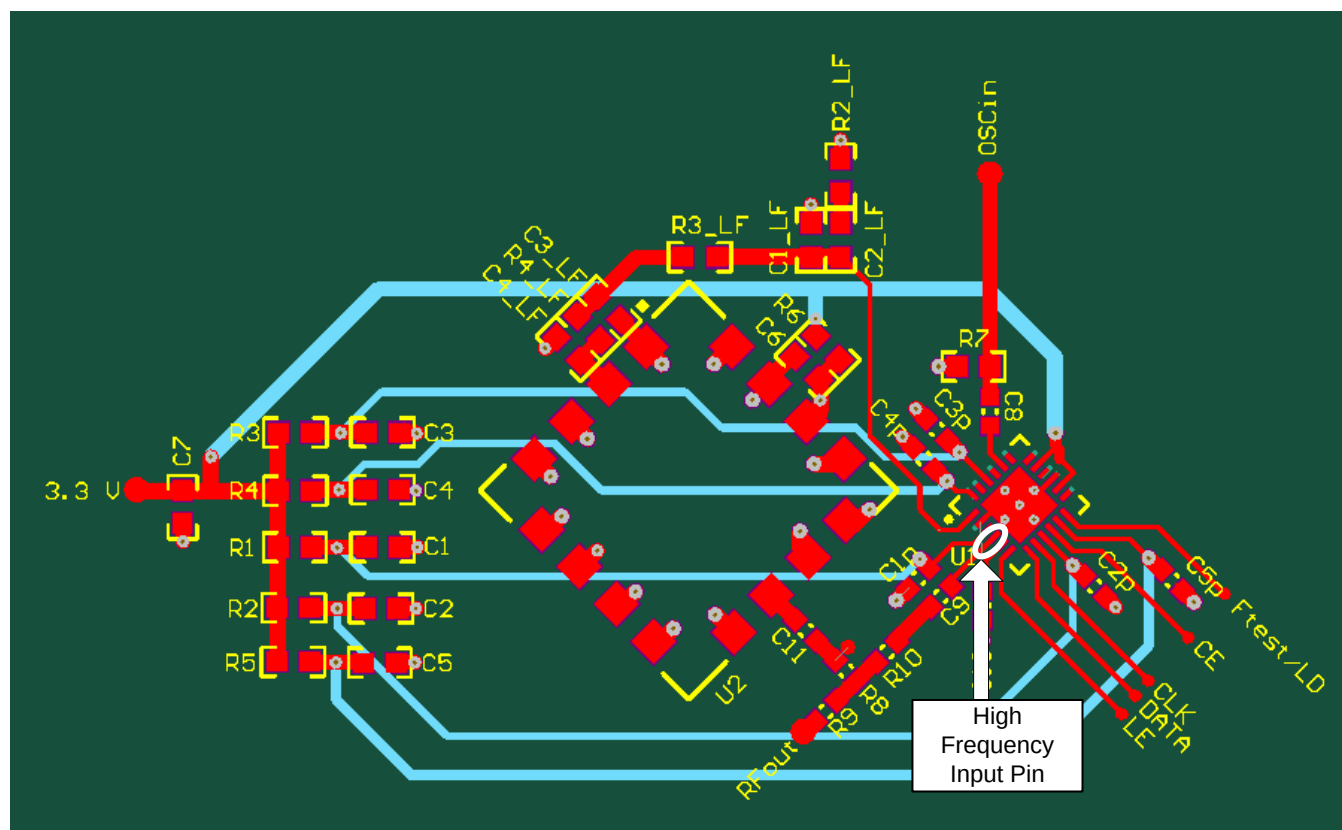

**Figure 36. Layout Example**

## 12 Device and Documentation Support

### 12.1 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.2 Trademarks

PLLatinum, E2E are trademarks of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 12.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 12.4 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| LMX2485QSQ/NOPB  | ACTIVE        | WQFN         | RTW                | 24   | 1000           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-3-260C-168 HR  | -40 to 105   | X2485Q                  | <a href="#">Samples</a> |
| LMX2485QSQX/NOPB | ACTIVE        | WQFN         | RTW                | 24   | 4500           | Green (RoHS<br>& no Sb/Br) | CU SN                   | Level-3-260C-168 HR  | -40 to 105   | X2485Q                  | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

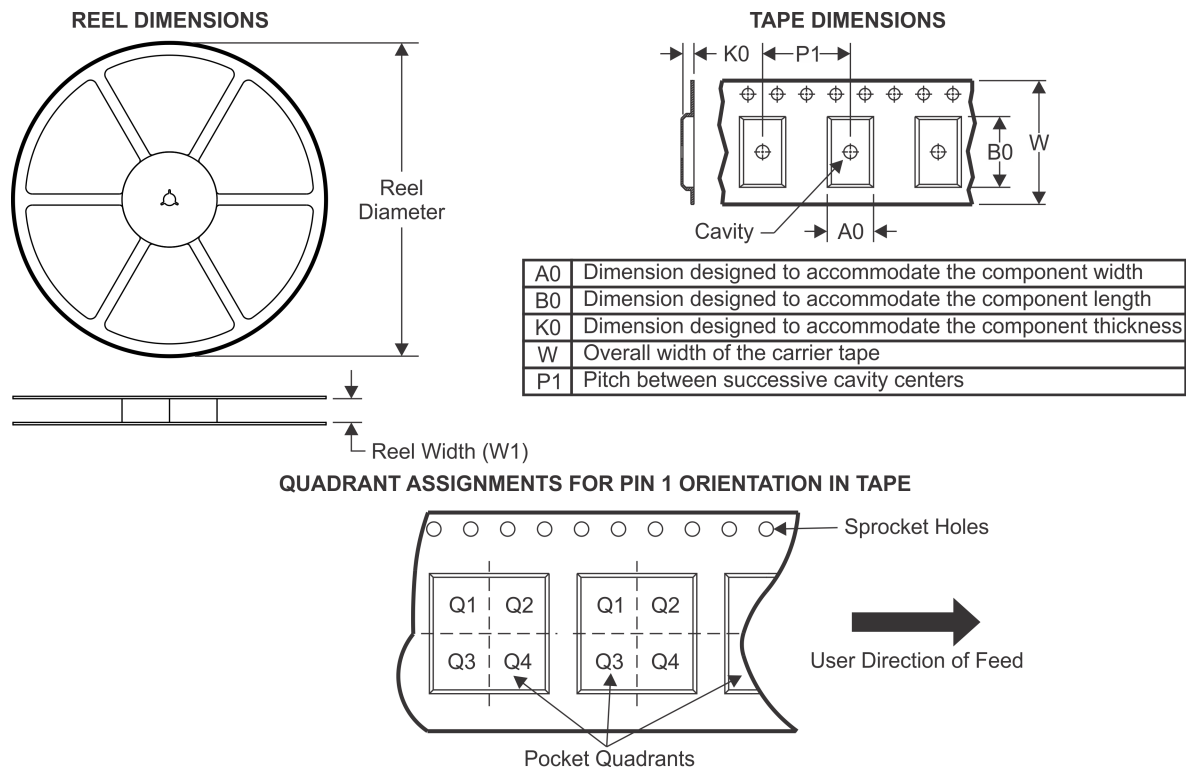**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LMX2485QSQ/NOPB  | WQFN         | RTW             | 24   | 1000 | 178.0              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |
| LMX2485QSQX/NOPB | WQFN         | RTW             | 24   | 4500 | 330.0              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |


## TAPE AND REEL BOX DIMENSIONS

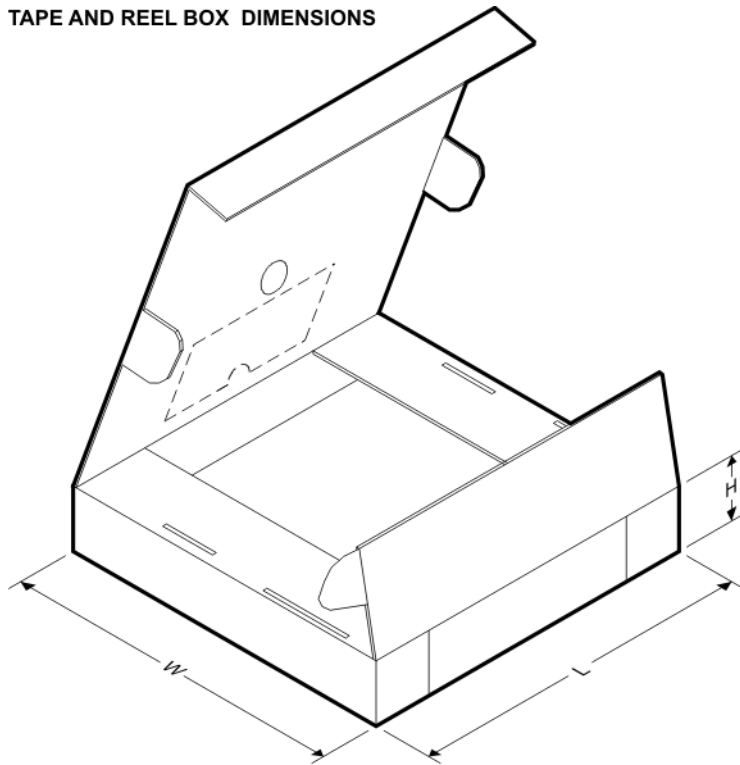

\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LMX2485QSQ/NOPB  | WQFN         | RTW             | 24   | 1000 | 213.0       | 191.0      | 55.0        |
| LMX2485QSQX/NOPB | WQFN         | RTW             | 24   | 4500 | 367.0       | 367.0      | 35.0        |



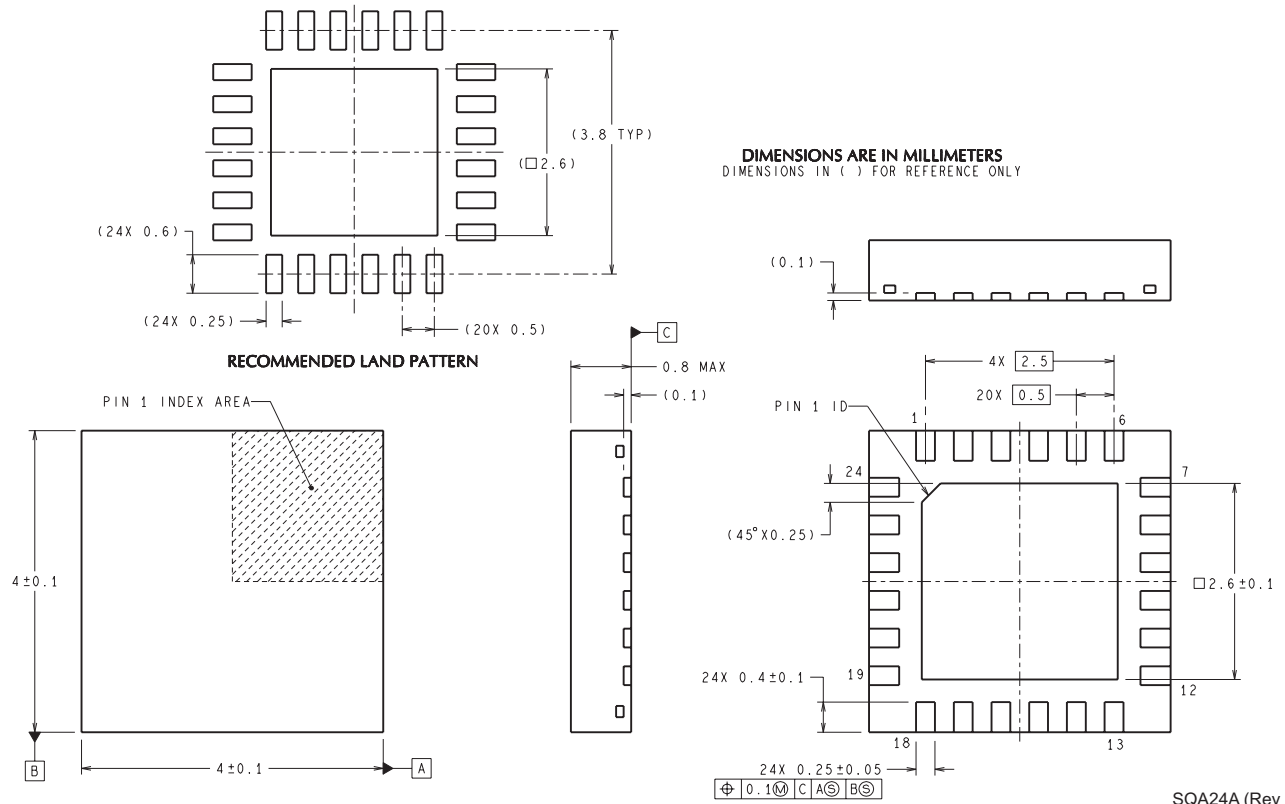

SQA24A (Rev B)

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)