



Vector Network Analyzers

MS46524A Series ShockLine™ Vector Network Analyzers

Introduction

The MS46524A is part of the ShockLine™ family of Vector Network Analyzers from Anritsu. It is a low-cost series of 4-port RF Vector Network Analyzers. It is available in two frequency ranges: 10 MHz to 4.5 GHz and 10 MHz to 7 GHz. It is capable of measuring 16 single-ended and mixed-mode s-parameters of passive multiport and differential devices.

The MS46524A series supports SCPI command programming and has software driver support for the most common programming environments. The MS46524A use industry standard LAN communications for robust remote control in test applications. ShockLine™ VNAs provide a powerful graphical user interface for manual testing of devices. The full-featured user interface is enabled by attaching a (user-supplied) touchscreen monitor, keyboard, and mouse.

This document provides detailed specifications for the MS46524A series Vector Network Analyzers (VNAs) and related options.

Instrument Models and Operating Frequencies

- Base Model: MS46524A, 4-Port ShockLine™ VNA
- Requires one Frequency Option:
 - MS46524A-004, 10 MHz to 4.5 GHz
 - MS46524A-007, 10 MHz to 7 GHz

Principal Options

- MS46524A-002, Time Domain



MS46524A 4-Port ShockLine™ VNA

Description	Page
Definitions	2
System Dynamic Range	3
Receiver Compression Levels	3
High Level Noise	3
Output Power Range	3
Output Default Power	3
Power Accuracy.	3
Setting Resolution.	3
Frequency Resolution, Accuracy, and Stability	3
Source Harmonics and Non-Harmonics (Spurious).	3
Uncorrected (Raw) Port Characteristics	3
VNA System Performance for MS46524A-004 and MS46524A-007 Frequency Options	4
Measurement Throughput Summary	5
Standard Capabilities.	5
Calibration and Correction Capabilities.	7
Optional Capabilities	7
Remote Operability	7
Front Panel Connections.	8
Rear Panel Connections	8
CPU, Memory, and Security Features.	9
Mechanical	9
Environmental	9
Electromagnetic Compatibility.	9
Safety	9
Warranty	9
Ordering Information.	10

Definitions

	All specifications and characteristics apply under the following conditions, unless otherwise stated:
Warm-Up Time	After 45 minutes of warm-up time, where the instrument is left in the ON state.
Temperature Range	Over the 25 °C ± 5 °C temperature range.
Error-Corrected Specifications	For error-corrected specifications, over 23 °C ± 3 °C, with < 1 °C variation from calibration temperature. For error-corrected specifications are warranted and include guard-bands, unless otherwise stated.
Frequency Bands in Tables	When a frequency is listed in two rows of the same table, the specification for the common frequency is taken from the lower frequency band.
User Cables	Specifications do not include effects of any user cables attached to the instrument.
Discrete Spurious Responses	Specifications may exclude discrete spurious responses.
Internal Reference Signal	All specifications apply with internal 10 MHz Crystal Oscillator Reference Signal.
Interpolation Mode	All specifications are with Interpolation Mode Off.
Standard	Refers to instruments without Options.
Typical Performance	Typical performance indicates the measured performance of an average unit. It does not include guard-bands and is not covered by the product warranty. Typical specifications are shown in parenthesis, such as (-102 dB), or noted as Typical. Dynamic Range specification is typical from 2300 MHz to 2500 MHz. High Level Noise specification is typical from 1450 MHz to 1550 MHz.
Characteristic Performance	Characteristic performance indicates a performance designed-in and verified during the design phase. It does include guard-bands and is not covered by the product warranty.
Recommended Calibration Cycle	12 months (Residual specifications also require calibration kit calibration cycle adherence.)
Specifications Subject to Change	All specifications subject to change without notice.

System Dynamic Range

System dynamic range is calculated as the difference between the maximum specified source power and the noise floor (RMS) at the specified reference plane at 10 Hz IF Bandwidth.

Frequency Range	Standard (dB)	Typical (dB)
10 MHz to 7 GHz	> 110	115

Receiver Compression Levels

Port power level beyond which the response may be compressed more than 0.3 dB relative to the normalization level. Measured at 300 Hz IF bandwidth. Match not included. Performance is typical.

Frequency Range	Standard (dBm)
10 MHz to 7 GHz	+10

High Level Noise

Measured at 100 Hz IF bandwidth and at default power level, RMS.

Frequency	Magnitude (dB)	Phase (deg)
10 MHz to 7 GHz	< 0.006	< 0.1

Output Power Range

Minimum to maximum rated power level. Performance is characteristic.

Frequency	Standard (dBm)
10 MHz to < 6 GHz	-30 to +15
6 GHz to 7 GHz	-30 to +12

Output Default Power

Instrument default power is +5 dBm. For maximum rated power, refer to Output Power Range above.

Power Accuracy

Performance is typical.

Output Power	Accuracy (dB)
At +5 dBm	± 1.0
At 0 dBm	± 1.0
At -30 dBm	± 3.0

Setting Resolution

Output Power	Setting Resolution (dB)
10 MHz to 7 GHz	0.01

Frequency Resolution, Accuracy, and Stability

All specifications typical.

Resolution	Accuracy	Stability/Temperature	Stability/Time
1 Hz	± 1.0 ppm (at time of calibration)	± 0.1ppm/10° C to 70° C	± 0.02 ppm/24 Hr. ± 0.2 ppm/1 Mo. ± 1.0 ppm/1 Yr. ± 2.0 ppm/3 Yr.

Source Harmonics and Non-Harmonics (Spurious)

Measured at 0 dBm. All specifications typical.

Frequency	Harmonics (second and third) (dBc)	Non-Harmonic Spurious (dBc)	Phase Noise @ 10 kHz Offset (dBc/Hz)
10 MHz to < 50 MHz	< -20	< -30	> 60
50 MHz to 7 GHz	< -30	< -30	> 60

Uncorrected (Raw) Port Characteristics

All specifications typical. User and system correction off.

Frequency Range	Directivity (dB)	Port Match (dB) ^a
10 MHz to < 1 GHz	> 9	> 15
1 GHz to < 4 GHz	> 7	> 7
4 GHz to 7 GHz	> 4	> 7

a. Port Match is defined as the worst of source and load match.

Error-Corrected Specifications


With 12-term SOLT Calibration using the 3653A N Type Connector Calibration Kit.

Frequency Range	Directivity (dB)	Source Match (dB)	Load Match ^a (dB)	Reflection Tracking ^a (dB)	Transmission Tracking ^a (dB)
10 MHz to < 30 MHz	> 42	> 35	> 38	±0.15	±0.09
30 MHz to < 5 GHz	> 42	> 35	> 38	±0.08	±0.05
5 GHz to 7 GHz	> 36	> 35	> 33	±0.08	±0.05

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at 0 dBm or default port power, whichever is less. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

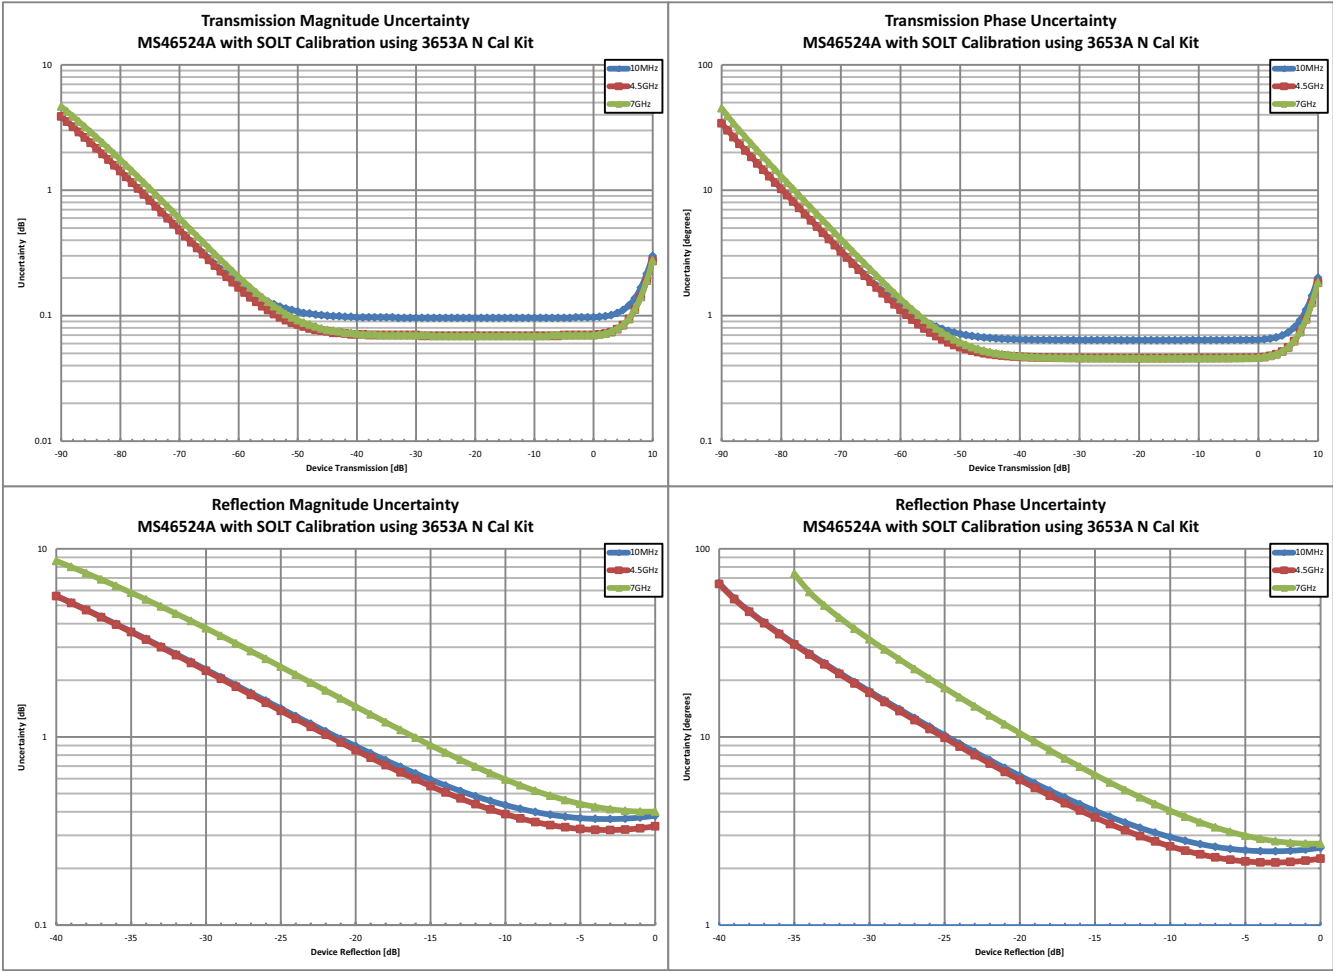

Measurement Throughput Summary

Cycle Time for Measurement Completion (ms)

Number of traces = 1; system error correction on. Typical performance data.

Number of Points	500 kHz IF Bandwidth				100 kHz IF Bandwidth				1 kHz IF Bandwidth			
	51	201	401	1601	51	201	401	1601	51	201	401	1601
Start 1 GHz, stop 1.2 GHz												
Uncorrected	6	17	31	116	7	18	34	130	61	229	454	1810
2-Port Cal	12	32	60	232	12	35	67	258	121	460	911	3623
4-Port Cal	25	67	125	466	28	72	134	512	241	919	1822	7247
Start 10 MHz, stop 4.5 GHz												
Uncorrected	9	19	33	118	8	21	36	132	61	231	457	1811
2-Port Cal	15	36	64	234	14	40	71	261	124	464	916	3626
4-Port Cal	30	74	131	473	30	79	143	520	248	928	1832	7253
Start 10 MHz, stop 7 GHz												
Uncorrected	9	20	33	117	9	22	37	133	66	231	457	1812
2-Port Cal	15	37	65	236	15	40	72	262	125	465	917	3628
4-Port Cal	31	75	143	475	32	81	145	522	249	929	1834	7255

Data Transfer Time (ms)

Transferred complex S11 data, using "CALC:DATA:SDATA?" command. Typical performance data.^a

Number of Points	51	201	401	1601
SCPI over LAN				
REAL 64	4	4	4	8
REAL 32	4	4	4	8
ASCII	14	34	60	209

a. Data transfer time varies depending on the PC and control software used with the VNA.

Standard Capabilities

Operating Frequencies

MS46524A-004	10 MHz to 4.5 GHz
MS46524A-010	10 MHz to 7 GHz

Measurement Parameters

4-Port Measurements	16 single-ended S-parameters, and any user-defined combination of a_{1-4} , b_{1-4} , and 1. 16 mixed-mode S-parameters (DD, CC, DC, CD); uses the superposition technique.
Domains	Frequency Domain, and Time (Distance) Domain

Sweeps

Frequency Sweep Types	Linear, Log, or Segmented
Power Sweep Types	Linear

Display Graphs

Single Rectilinear Graph Types	Log Magnitude, Phase, Group Delay, Linear Magnitude, Real, Imaginary, SWR, and Impedance
Circular Graph Types	Smith Chart (Impedance)

Measurements Data Points

Maximum Data Points	2 to 20,001 points
---------------------	--------------------

Limit Lines

Limit Lines	Single or segmented. 2 limit lines per trace. 50 segments per trace.
Single Limit Readouts	Uses interpolation to determine the intersection frequency.
Test Limits	Both single and segmented limits can be used for PASS/FAIL testing.

Averaging

Point-by-Point	Point-by-point (default), maximum number of averages = 4096
Sweep-by-Sweep	Sweep-by-sweep, maximum number of averages = 4096

IF Bandwidth

10, 20, 30, 50, 70, 100, 200, 300, 500, 700 Hz
1, 2, 3, 5, 7, 10, 20, 30, 50, 70, 100, 200, 300, 500 kHz

Reference Plane

Line Length or Time Delay	The reference planes of a calibration or other normalization can be changed by entering a line length or time delay.
Dielectric Constants	Dielectric constants may be entered for different media so the length entry can be physically meaningful.
Attenuations	Attenuations (with frequency slope) and constant phase offsets can be entered to better describe any reference plane distortions.

Measurement Frequency Range

Frequency Range Change	Frequency range of the measurement can be narrowed within the calibration range without recalibration.
CW Mode	CW mode permits single frequency measurements also without recalibration.
Interpolation Not Activated	If interpolation is not activated, the subset frequency range is forced to use calibration frequency points.
Interpolation Activated	If interpolation is activated, any frequency range that is a subset of the calibration frequency range can be used, but there may be some added interpolation error.

Group Delay

Group Delay Aperture	Defined as the frequency span over which the phase change is computed at a given frequency point.
Aperture	The aperture can be changed without recalibration.
Minimum Aperture	The minimum aperture is the frequency range divided by the number of points in calibration and can be increased to 20 % of the frequency range.
Group Delay Range	< 180° of phase change within the aperture

Display and Traces

Traces	Up to 16 traces
Display Colors	Unlimited colors for data traces, memory, text, markers, graticules, and limit lines
Trace Memory and Math	A separate memory for each trace can be used to store measurement data for later display or subtraction, addition, multiplication or division with current measurement data. The trace data can be saved and recalled.
Intra-trace Math	Any two traces within a channel can be combined (via addition, subtraction, multiplication, or division) and displayed on another trace.

Scale Resolution

	Minimum per division, varies with graph type.
Log Magnitude	0.001 dB
Linear Magnitude	10 μ U
Phase	0.01°
Group Delay	0.1 ps
Time	0.0001 ps
Distance	0.1 μ m
SWR	10 μ U
Power	0.01 dB

Markers

Markers	12 markers + 1 reference marker per trace
Marker Coupling	Coupled or decoupled
Marker Data	Data displayed in graph area or in table form
Reference Marker	Additional marker per trace for reference
Marker Statistics	Mean, maximum, minimum, standard deviation Per trace or over a marker region
Marker Search and Tracking	Search and/or track for minimum, maximum, peak, or target value

Other

Filter Parameters	Display bandwidth (user-selectable loss value), corner and center frequencies, loss, Q, and shape factors.
-------------------	--

Calibration and Correction Capabilities

Calibration Methods

Short-Open-Load-Through (SOLT)
 Short-Open-Load-Reciprocal (SOLR)
 Line-Reflect-Line (LRL) / Line-Reflect-Match (LRM)
 Thru Update available

Correction Models

4-port Cals (uses two Full 2-port Cals and up to 4 additional Thru/Reciprocal, minimum of 1)
 3-port Cals (uses one Full 2-port Cal, one Full 1-port Cal, and up to 2 additional Thru/Reciprocal, minimum of 1)
 2-Port (Forward, Reverse, or both directions)
 1-Port (S_{11} , S_{22} , or both)
 Transmission Frequency Response (Forward, Reverse, or both directions)
 Reflection Frequency Response (S_{11} , S_{22} , or both)

Coefficients for Calibration Standards

Use the Anritsu calibration kit USB memory device to load kit coefficients and characterization files.
 Enter coefficients into user-defined locations.
 Use complex load models.

Interpolation

Allows interpolation between calibration frequency points.

Adapter Removal Calibration

Characterizes and "removes" an adapter that is used during calibration that will not be used for subsequent device measurements; for accurate measurement of non-insertable devices.

Dispersion Compensation

Selectable as Coaxial, other non-dispersive (e.g., for coplanar waveguide), Waveguide, or Microstrip

Embedding/De-embedding

The MS46524A is equipped with an Embedding/De-embedding system.

De-embedding is generally used for removal of test fixture contributions, modeled networks, and other networks described by S-parameters (s2p files) from measurements.

Similarly, the Embedding function can be used to simulate matching circuits for optimizing amplifier designs or simply adding effects of a known structure to a measurement.

Multiple Networks Multiple networks can be embedded/de-embedded and changing the port and network orientations is handled easily.

Optional Capabilities

Time Domain Measurements
 Option 002

Displays all S-parameters and overlays with Frequency Domain, Low-pass Mode with added harmonics frequency list flexibility, Band-pass Mode, Phasor Impulse Mode, Windowing, Gating (pass-band or reject-band), and Frequency with Time Gate.

Remote Operability

ShockLine supports several remote operability options.

Communication Type	Data Format	Performance	Description
Via LAN	Using VXI-11 Protocol	Gigabit Data Transfer Speed	Use SCPI commands
Driver for LAN	Please contact Anritsu Customer Service (ShockLineVNA.support@Anritsu.com) for details.		
Triggering	Start Trigger	Software and digital edge	
	Input Range	+3.3 V logic level (+5 V tolerant)	
	Minimum Trigger Width	50 ns	
	Trigger Delay	6 μ s, typical	

Front Panel Connections

Test Ports 1 and 2	
MS46524A-004	N(f)
MS46524A-007	N(f)
Damage Input Levels	+27 dBm maximum, 50 VDC maximum
USB Ports	
Two type A USB 2.0 Ports for peripherals such as keyboard, mouse, memory stick, hardware key, and similar devices.	
Chassis Grounding Port	
Banana(f)	



MS46524A Front Panel

Rear Panel Connections



MS46524A Rear Panel

AC Power Input		AC Input connector, with On/Off switch, and fuses 350 VA maximum, 90 to 264 VAC, 47 to 63 Hz (power factor controlled)
USB and LAN		
	USB Ports	Two type A USB 2.0 ports and two type A USB 3.0 ports for peripherals such as keyboard, mouse, flash drive, hardware key.
	LAN Port	Gigabit Ethernet
HDMI Port		Video output, touchscreen compatible
10 MHz In		Signal presence is auto-sensing (better than 10 ppm frequency accuracy is recommended).
	Connector Type	BNC(f)
	Signal	+0 dBm, typical; 50 Ω, nominal
External Trigger Input		
	Connector Type	BNC(f)
	Voltage Input	0 to 3.3 V input (5 V tolerant)
	Impedance	High impedance (> 100 kΩ)
	Pulse Width	50 ns minimum input pulse width
	Edge Trigger	Programmable edge trigger
	Trigger Delay	6 μs typical

CPU, Memory, and Security Features

CPU	Intel Core™ i5
Storage	Serial-ATA (SATA) Solid State Drive (SSD), for OS, Programs, and Data (> 30 GB).

Security Features

Virus Protection, Best Practices	If the VNA is attached to a network, best practices recommend installing anti-virus software.
----------------------------------	---

Mechanical

Dimensions

	Dimensions listed are for the instrument body without rack mount option attached.
H x W x D	108 mm x 484 mm x 590 mm

Weight

< 12.5 kg (< 28 lb), typical weight for a fully-loaded MS46524A-007 VNA

Environmental

Operating

	Specification Conforms to MIL-PRF-28800F (class 3)
Temperature Range	0 °C to +50 °C
Relative Humidity	5 % to 95 % at +40 °C, Non-condensing

Non-Operating

Temperature Range	-40 °C to +75 °C
Relative Humidity	0 % to 90 % at +65 °C, Non-condensing

Electromagnetic Compatibility

EMI Conforms to and meets the requirements of:

EMC Directive	2004/108/EC
Low Voltage Directive	2006/95/EC
Emissions	EN55011:2009+A1:2010 Group 1 Class A
Immunity	EN 61000-4-2:2009, 4 kV CD, 8 kV AD EN 61000-4-3:2006+A2:2010, 3 V/m EN 61000-4-4:2004, 0.5 kV S-L, 1 kV P-L EN 61000-4-5:2006, 0.5 kV S-L, 1 kV L-E EN 61000-4-6:2009, 3 V EN 61000-4-11:2004, 100% @ 20 ms

Safety

European Union	CE Mark
Standard	EN 61010-1:2010

Warranty

Instrument and Built-In Options	3 years from the date of shipment (standard warranty)
Calibration Kits	Typically 1 year from the date of shipment
Test Port Cables	Typically 1 year from the date of shipment
Warranty Options	Additional warranty available

Ordering Information

Instrument Models

Base Model	MS46524A, 4-Port ShockLine™ VNA
Requires One Frequency Option	MS46524A-004, 50 kHz to 4.5 GHz MS46524A-007, 50 kHz to 7 GHz

Included Accessories

	Each VNA comes with a set of included accessories.
User Documentation	The user documentation USB flash drive includes Adobe Acrobat PDF files for the ShockLine Operation Manual, User Interface Reference Manual, Programming Manual, and the Technical Data Sheet and Configuration Guide.
Power	Power Cord

Main VNA Options

MS46524A-001	Rack Mount, adds handles and removes feet for shelf-mounting into a 19 inch universal rack
MS46524A-002	Time Domain with Time Gating

Calibration Options

MS46524A-098	Standard Calibration, ISO 17025 compliant, without data
MS46524A-099	Premium Calibration, ISO 17025 compliant, with data

Mechanical Calibration Kits

3650	SMA/3.5 mm Calibration Kit
3653A	N Calibration Kit, Without Sliding Loads
TOSLN50A-8	Precision N Male Through/Open/Short/Load Mechanical Calibration Tee
TOSLNF50A-8	Precision N Female Through/Open/Short/Load Mechanical Calibration Tee
TOSLN50A-18	Precision N Male Through/Open/Short/Load Mechanical Calibration Tee
TOSLNF50A-18	Precision N Female Through/Open/Short/Load Mechanical Calibration Tee
TOSLK50A-20	Precision K Male Through/Open/Short/Load Mechanical Calibration Tee
TOSLKF50A-20	Precision K Female Through/Open/Short/Load Mechanical Calibration Tee

RF Cables and Adapters

N120-6	RF Cables, Semi-Rigid, N(m) to N(m), 1 each, 0.01 to 18 GHz, 50 Ω, 15 cm (5.9 in)
NS120MF-6	RF Cables, Semi-Rigid, N(f) to N(f), 1 each, 0.01 to 18 GHz, 50 Ω, 15 cm (5.9 in)
1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NFN50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω
34NK50	Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω
34NKF50	Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω
34NFK50	Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω
34NKF50	Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω

Test Port Cables, Flexible, Ruggedized, Phase Stable

15NNF50-1.0B	Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.0 m
15NNF50-1.5B	Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.5 m
15NN50-1.0B	Test Port Cable, Flexible, Phase Stable, N(m) to N(m), 1.0 m
15LL50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(m), 1.0 m, 50 Ω
15LLF50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(f), 1.0 m, 50 Ω
15KK50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(m), 1.0 m, 50 Ω
15KKF50-1.0A	Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(f), 1.0 m, 50 Ω
SC8267	Cable, K(m) to K(f), 40 GHz, 36 inches

Phase-Stable 18 GHz and 40 GHz Semi-Rigid Cables (Armored)

3670N50-1	0.3 m (12"), DC to 18 GHz, N(f) to N(m), 50 Ω
3670NN50-1	0.3 m (12"), DC to 18 GHz, N(m) to N(m), 50 Ω
3670N50-2	0.6 m (24"), DC to 18 GHz, N(f) to N(m), 50 Ω
3670NN50-2	0.6 m (24"), DC to 18 GHz, N(m) to N(m), 50 Ω

Transit Case

760-269	ShockLine™ VNA Transit Case, Hard plastic with wheels
---------	---

Tools

01-200	Calibrated Torque End Wrench, GPC-7 and Type N
01-201	Torque End Wrench, 5/16 in, 0.9 N·m (8 lbf·in), For tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors
01-204	End Wrench, 5/16 in, Universal, Circular, Open-ended, For SMA, 3.5 mm, 2.4 mm, K and V connectors

Documentation

User Documentation	Soft copies of the manuals as Adobe Acrobat PDF files are included on the User Documentation USB flash drive provided with the instrument. The Maintenance Manual is available from Anritsu Customer Service. For more information, please contact ShockLineVNA.support@Anritsu.com .
10410-00330	MS46522A/524A Series VNA Operation Manual (OM)
10410-00332	MS46522A/524A Series VNA User Interface Reference Manual (UIRM)
10410-00333	MS46522A/524A Series VNA Programming Manual (PM), for IEEE 488.2 and SCPI Commands

Notes



Anritsu

• United States

Anritsu Company

1155 East Collins Blvd., Suite 100,
Richardson, TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120,
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 Paraíso, São Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU,
U.K.
Phone: +44-1582-433280
Fax: +44-1582-731303

• France

Anritsu S.A.

12 Avenue du Québec,
Bâtiment Iris 1-Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Borgafjordsgatan 13A, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu Finland

Teknobulevardi 3-5, 01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu AB (for Test & Measurement)

Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech
(Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu India Pvt. Ltd.

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

27th Floor, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, Xu Hui Di District,
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• Hong Kong

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower,
Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi,
Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu,
Seongnam-si,
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill
Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20140429



© Anritsu All trademarks are registered trademarks of their respective companies. Data subject to change without notice.
For the most recent specifications visit: www.anritsu.com
Anritsu utilizes recycled paper and environmentally conscious inks and toner.

MS46524A ShockLine™ TDS
Copyright May 2014 Anritsu Company, USA
All Rights Reserved



11410-00791



B