

N-M CRIMP LMR240 CRIMP, CAPTIVE PIN

SC9112

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-11 GHZ
VSWR 1.3:1 MAX
IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: Ni PLATED BRASS 100μ"
CENTER CONTACT: BRASS
CONTACT PLATING: Au 5μ"
DIELECTRIC: PTFE
INTERFACE: MIL-STD-348B
ROHS COMPLIANT
OP. TEMP RANGE: -55°C- +155°C

CABLES: LMR240

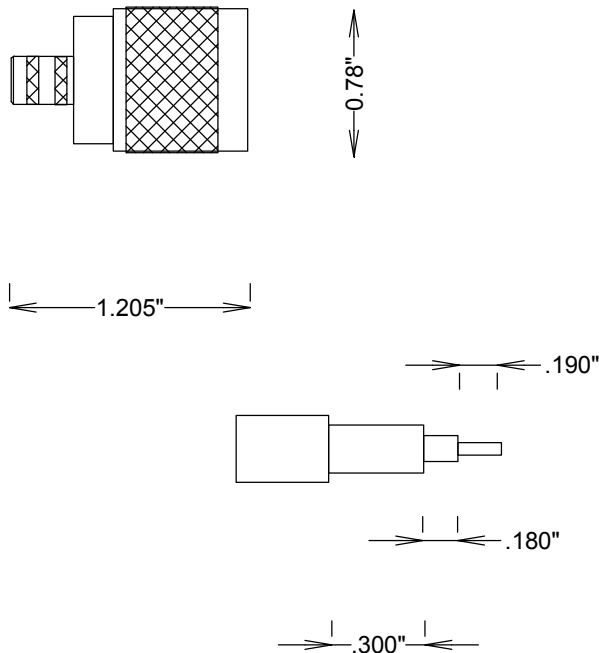

STRIPPING DIMENSIONS

TRIM CABLE, INSERT INTO BODY, CRIMP OUTER SHIELD

					FAIRVIEW MICROWAVE INC.		
					ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		
					TITLE		
					N-M CRIMP LMR240 CRIMP, CAPTIVE PIN		
		SIZE	CAGE CODE	DWG NO			
		A	3FKR5	SC9112			
		SCALE				SHEET	REV