



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Tao-Yuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet for Product Specification

Issued Date:

Product Name: 575MHz IF SAW Filter (BW=30MHz)

TST Parts No.: TB0759A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Andy Yu *Andy Yu*

Approval by: _____ Francis Chen *Francis Chen*

Date: _____ 04/20/2009



TAI-SAW TECHNOLOGY CO., LTD.

No.3, Industrial 2nd Rd., Ping-Chen Industrial District, Taoyuan, Taiwan, R.O.C.

TEL: 886-3-4690038

FAX: 886-3-4697532

E-mail: tstsales3@mail.taisaw.com Web: www.taisaw.com

SAW Filter 575MHz (SMD 5.0×5.0 mm)

MODEL NO.: TB0759A

Rev. NO. 1.0

A. MAXIMUM RATING:

1. Operating Temperature: -20 °C ~ +75 °C
2. Storage Temperature: -40 °C ~ +85 °C
3. Input power: 10dBm

RoHS Compliant
Lead free
Lead-free soldering


B. Characteristics :

Ambient Temperature: 25 °C


Characteristics		Value			Note
		Min.	Typ.	Max.	
Center frequency	F _c MHz	-	575.0	-	-
Minimum Insertion loss	I.L. dB	-	13.2	14.0	-
Amplitude Ripple	(560~590 MHz) dB	-	0.8	1.5	
Group Delay Variation	(560~590 MHz) ns	-	10	45	
Absolute group delay	(560~590 MHz) ns	-	290	-	-
Attenuation (Reference level from 0 dB)					
0 ~ 506	MHz dB	50	65	-	-
506 ~ 536	MHz dB	50	62	-	-
536 ~ 548	MHz dB	45	60	-	-
638 ~ 656	MHz dB	45	65	-	-
717 ~ 1000	MHz dB	50	70		
1000 ~ 1500	MHz dB	40	63		
Temp Coefficient	ppm/K	-	-23	-	-
Matching:					
1.The input of the filter will be matched to <u>50 ohm</u>					
2.The output of the filter will be matched to <u>50 ohm</u>					

C. FREQUENCY CHARACTERISTICS:


(1) S21 Response:(span 300MHz)

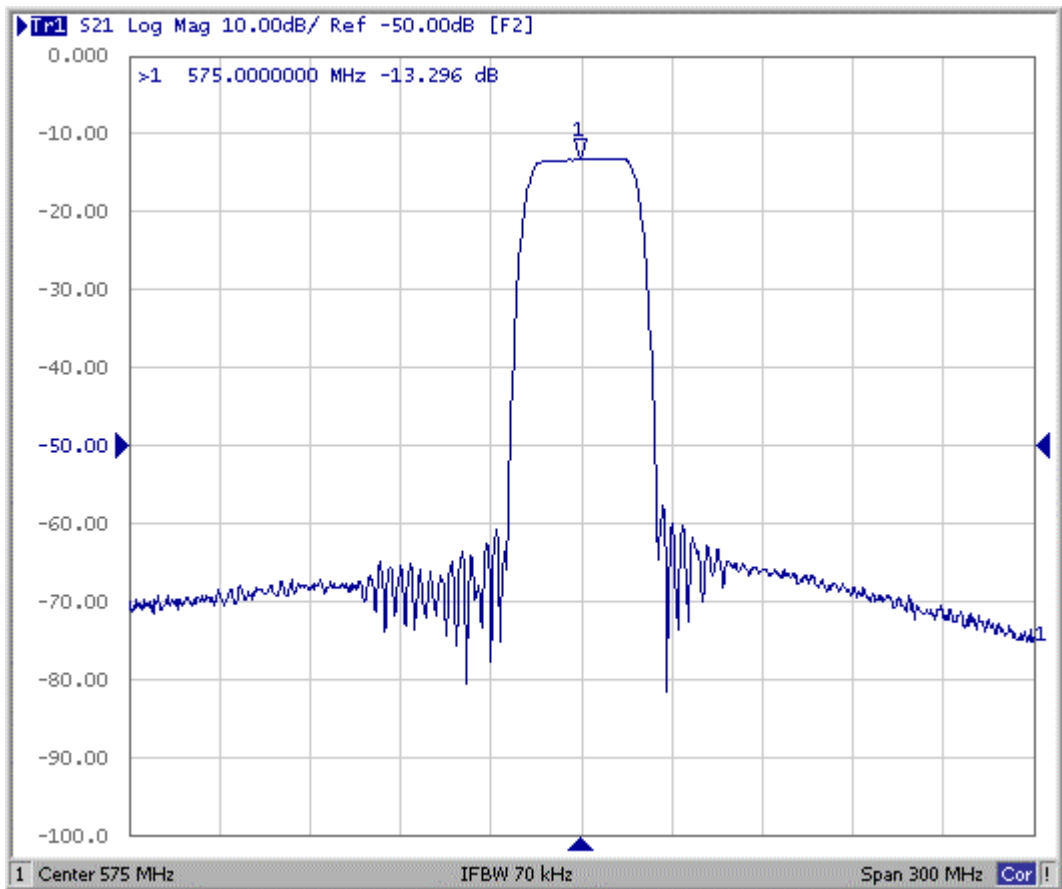


(2) S21 Response:(span 1.5GHz)

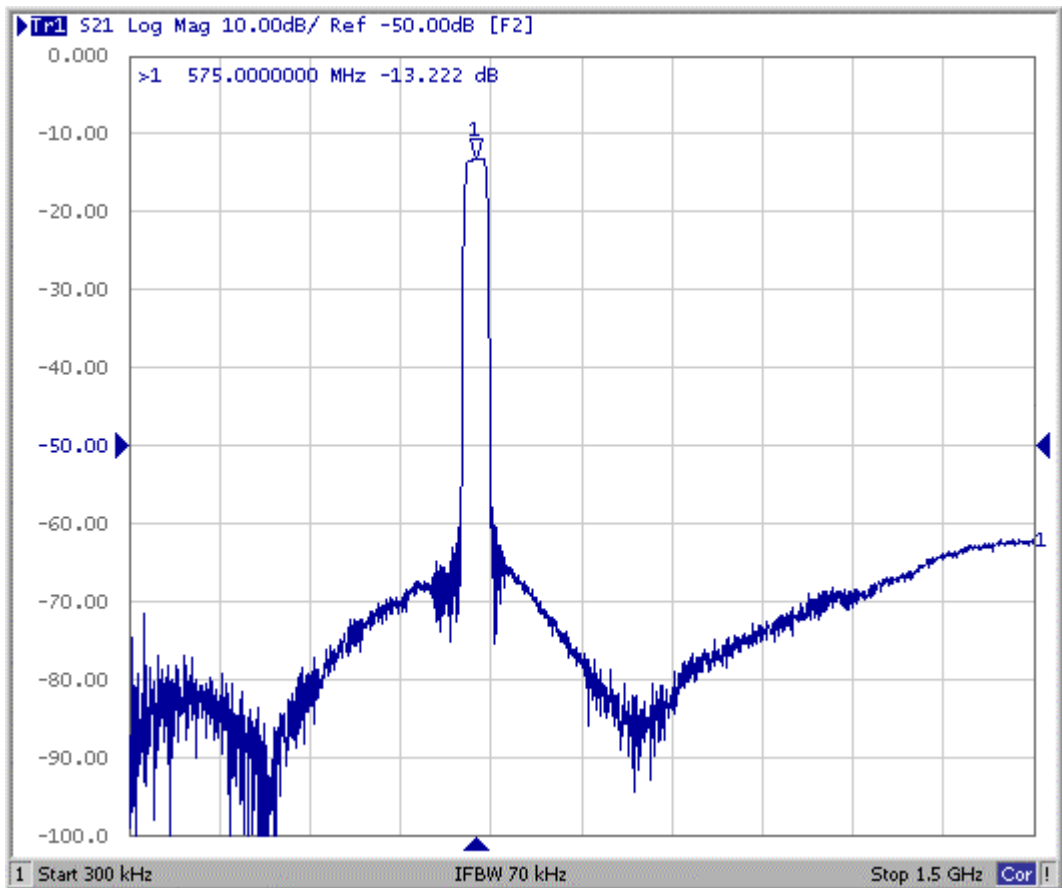


(3) Passband of Response: (span: 40MHz)

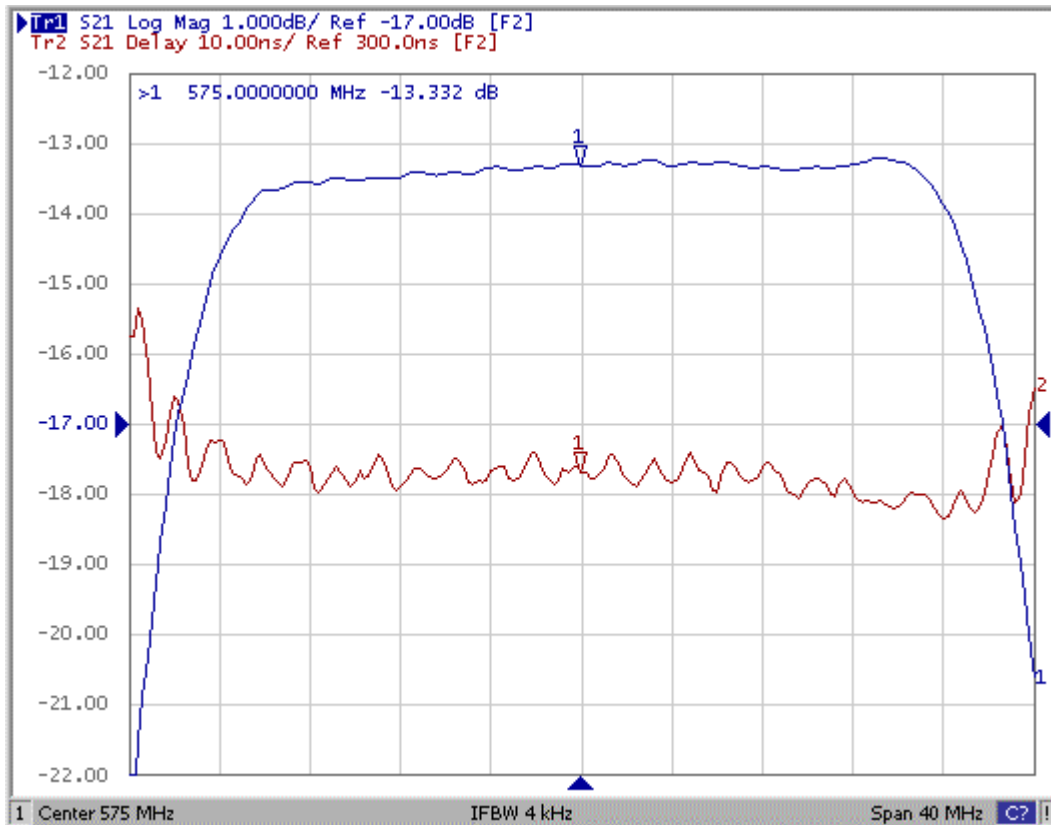


(4) S11 Smith Chart: (span 300MHz)

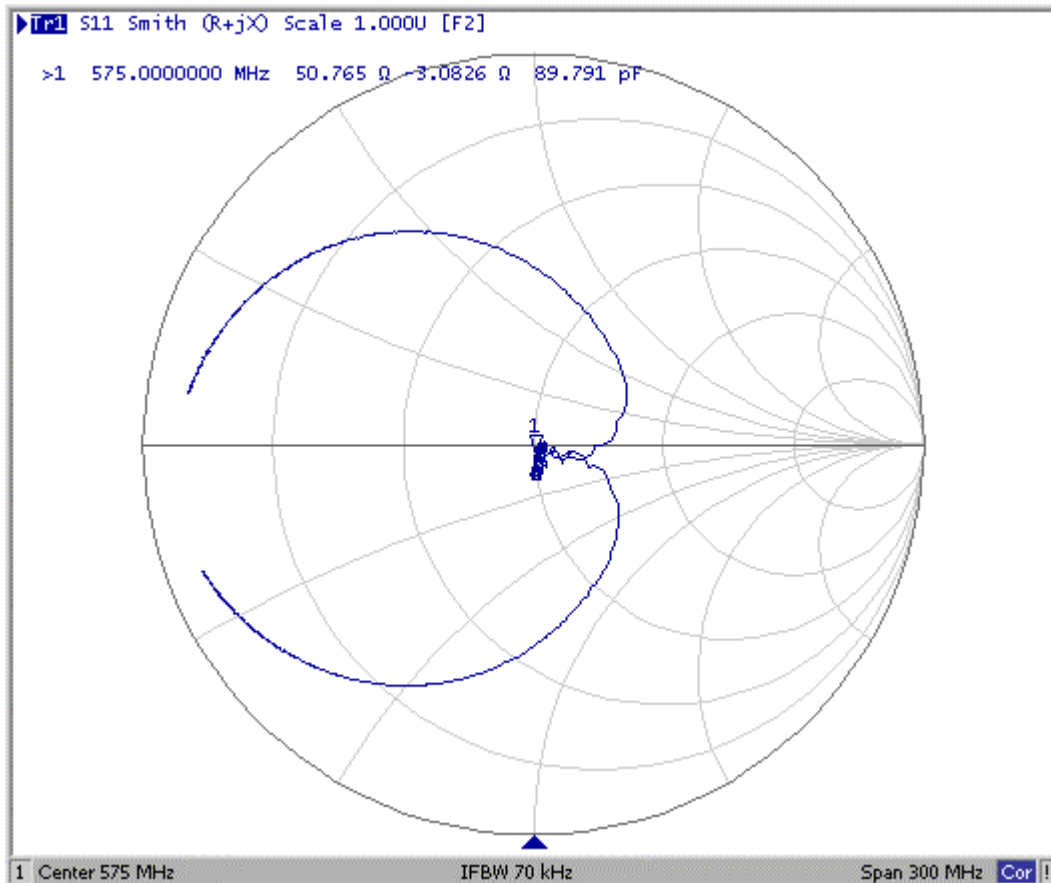

(5) S22 Smith Chart: (span 300MHz)

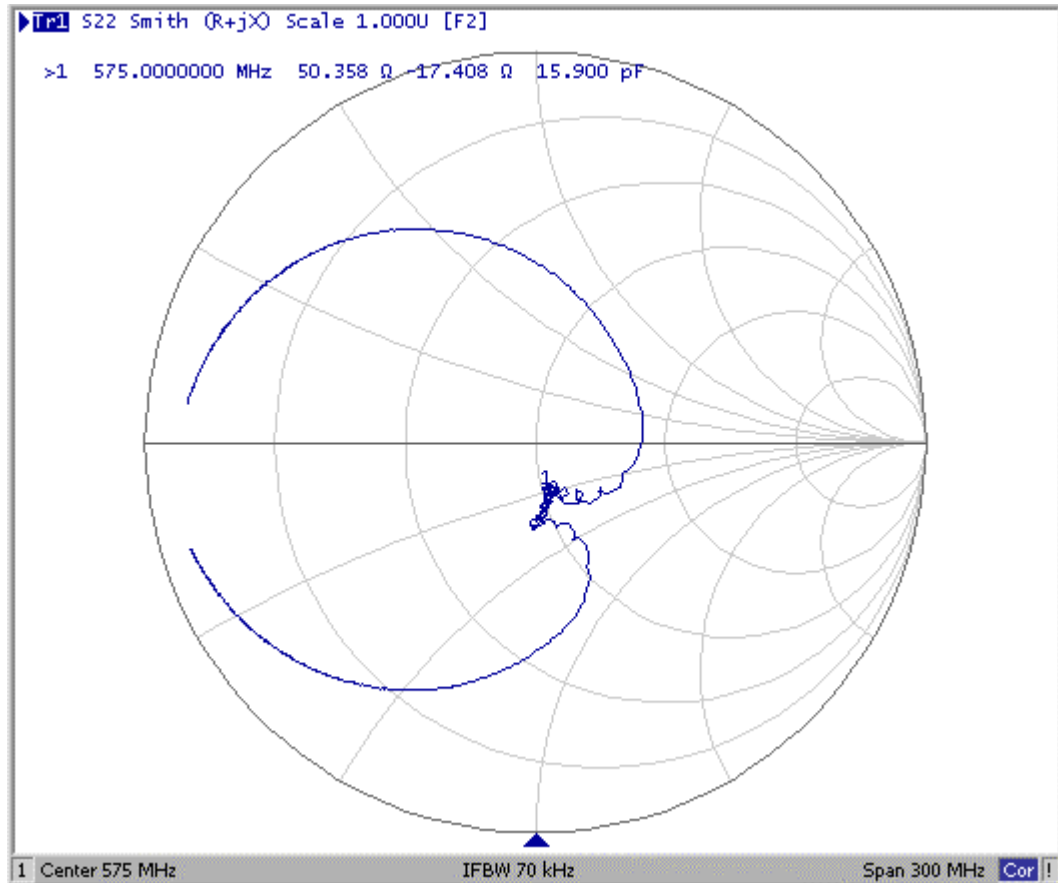


D. TEST CIRCUIT:

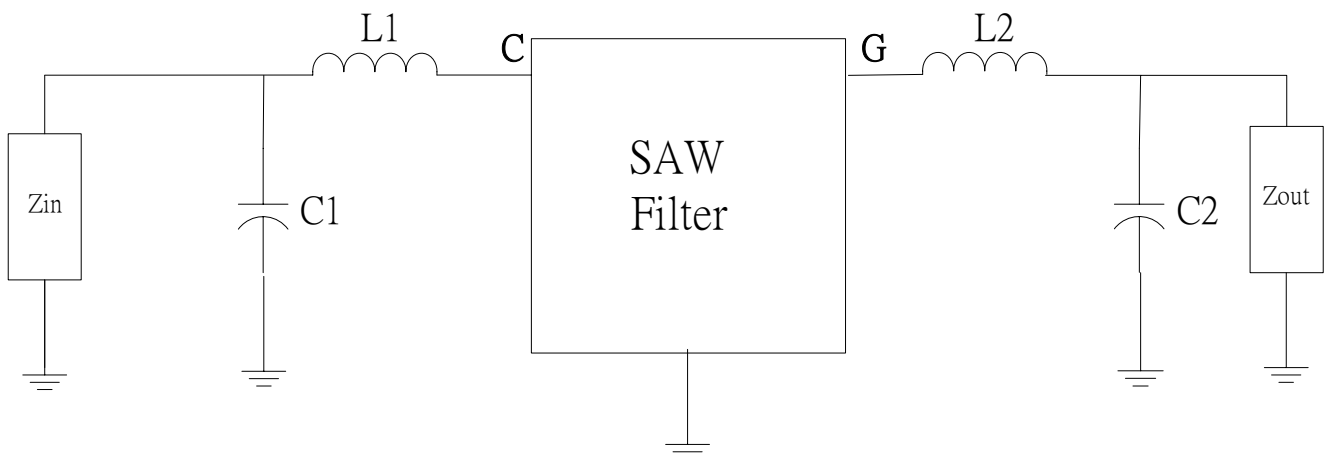

Zin and Zout are 50Ω

L1=6.8nH, C1=12pF, L2=10nH, C2=12pF

E. OUTLINE DRAWING:

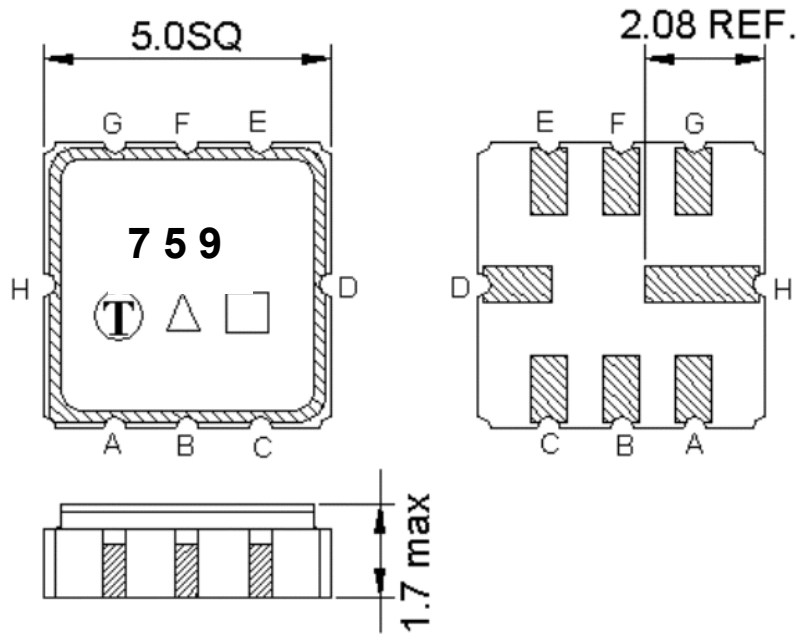

Pin C: RF input

Pin G: RF output

Pin H,D: Case Ground

Pin A, B, E, F: Ground

□ : Week Code (Follow the table from planner each year)


Unit : mm

△ : Product / Year Code


Year	2005 2009	2006 2010	2007 2011	2008 2012
Product Code	B	b	<u>B</u>	<u>b</u>

F. PACKING:

1. REEL DIMENSION

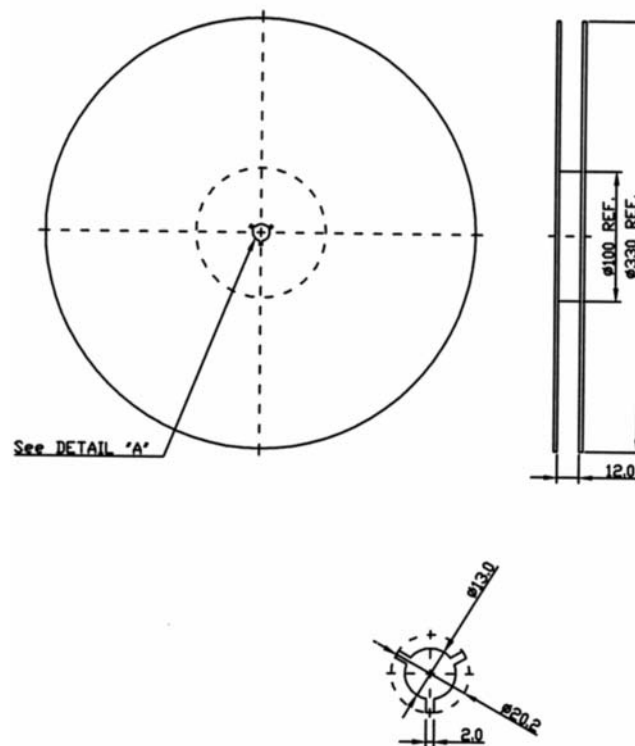

2. TAPE DIMENSION

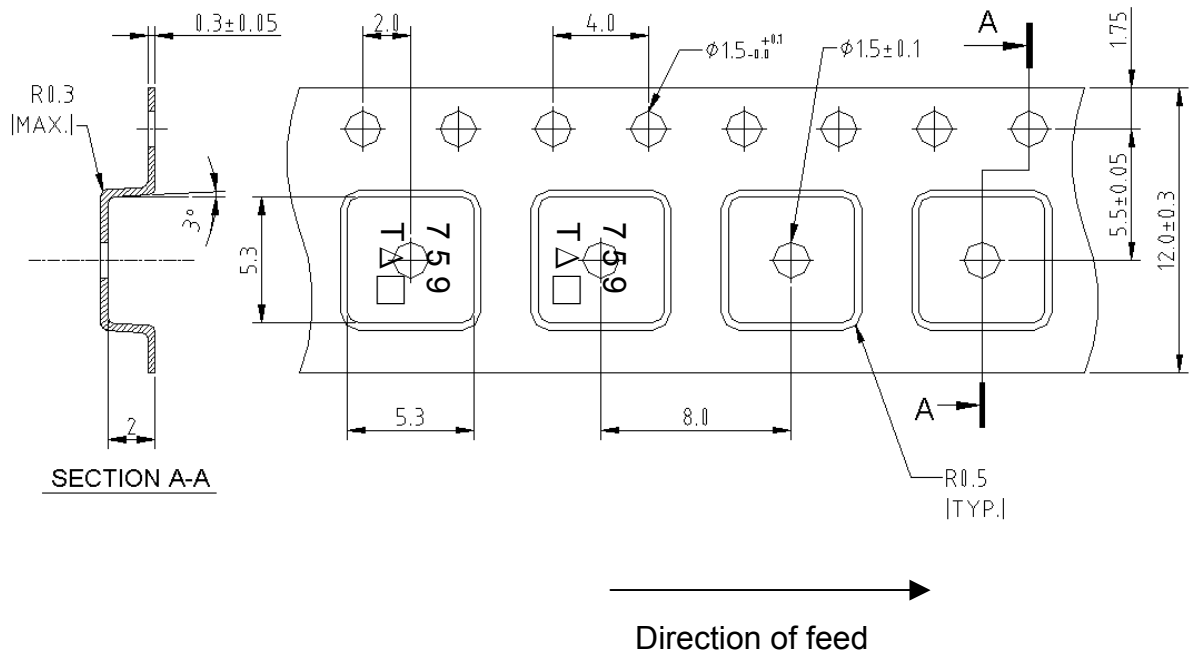

G. Recommended Reflow Profile:

