


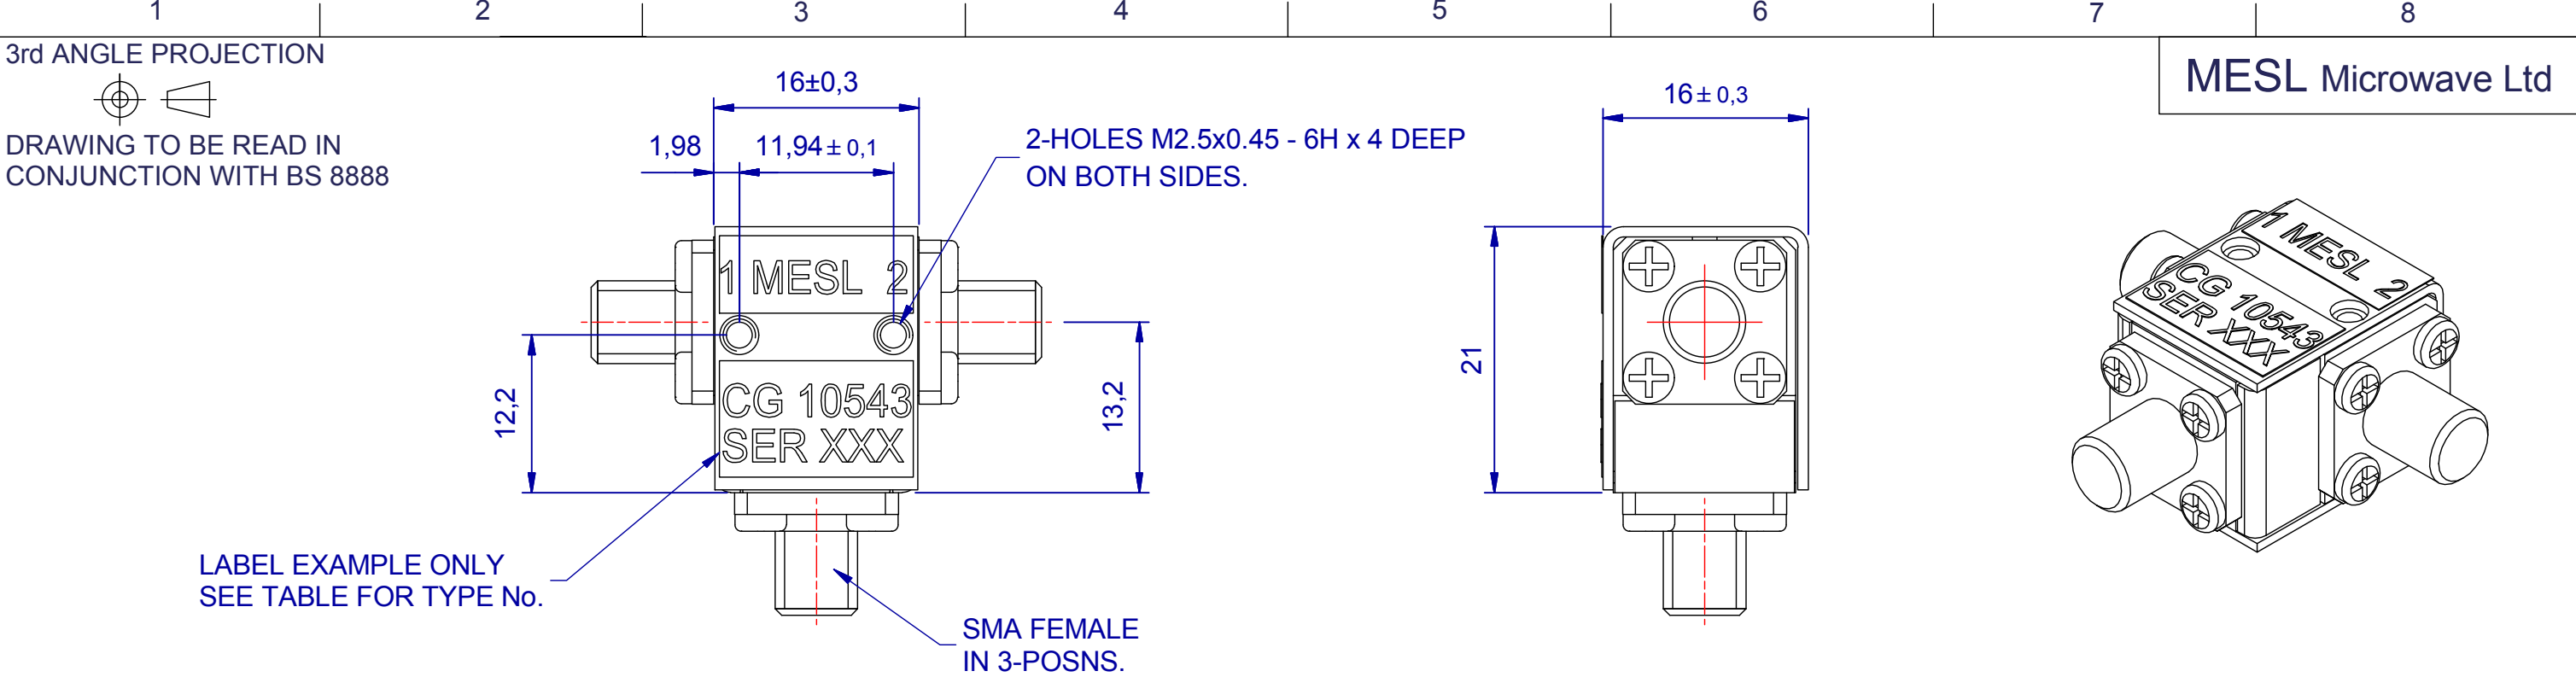

TYPE NUMBER	FREQUENCY (GHz.)	TYPICAL			-10°C to +65°C.		
		INSERTION LOSS (dB Max.)	RETURN LOSS (dB Min.)	ISOLATION (dB Min.)	INSERTION LOSS (dB Max.)	RETURN LOSS (dB Min.)	ISOLATION (dB Min.)
CG 10543	5.6 - 6.4	0.3	23	23	0.4	20	20
CG 10544	6.4 - 7.2	0.3	23	23	0.4	20	20
CG 10545	7.2 - 8.0	0.3	23	23	0.4	20	20
XG 10560	6.0 - 12.0	0.4	20	20	0.5	18	18
XG 10561	8.0 - 16.0	0.6	16	16	0.7	14	14
XG 10562	8.0 - 9.6	0.3	23	23	0.4	20	20
XG 10563	9.6 - 11.2	0.3	23	23	0.4	20	20
XG 10564	12.2 - 12.8	0.3	23	23	0.4	20	20
JG 10580	7.5 - 18.0	0.7	16	16	0.8	15	15
JG 10581	12.0 - 14.0	0.4	23	23	0.5	20	20
JG 10582	14.0 - 16.0	0.4	23	23	0.5	20	20
JG 10583	16.0 - 18.0	0.4	23	23	0.5	20	20

Q.A.

DATE

PROD.REL.

DATE

ENG.APP.

DATE

C	02.02.12	DRN VARIOUS
ISSUE	DATE	MOD NUMBER

NOTES : THIS UNIT IS RoHS COMPLIANT by DESIGN.
LIGHTLY REMOVE ALL BURRS AND SHARP EDGES U.O.S.

THIS DRAWING IS MESL Microwave Ltd. PROPERTY.
IT MAY NOT BE COPIED OR EXHIBITED WITHOUT WRITTEN PERMISSION.

A 3

MECH.ENG.

DATE

ORIGINAL SCALE 2:1

DO NOT SCALE PRINT

MATERIAL

SPECIFICATION

GENERAL TOLERANCE U.O.S. (ISO2768-fH)
0 - 6,0 : ±0,05 120,0 - 400,0 : ±0,2
6,0 - 30,0 : ±0,1 400,0 - 1000,0 : ±0,3
30,0 - 120,0 : ±0,15 1000,0 - 2000,0 : ±0,5
Angular Dim : ±0,5° Symmetry ±0,05

RESPONSIBLE AUTHORITY

TITLE

SECURITY CLASSIFICATION

CONTRACTORS DRAWING NUMBER

SERVICE DRAWING NUMBER

SHEET No. 1 OFF 1

DRAWN AB.

DATE 23/12/09

MASS (kg): N/A

DENSITY (g/cm^3): N/A

FINISH

SPECIFICATION

FINISH TO BE 1.6 U.O.S.

DIMENSION IN mm

5.6-18GHz COAXIAL CIRCULATOR

OUTLINE TYPE No SEE TABLE

BODY / LID : SurTec 650 Chromi

PLATES : BRIGHT NICKEL.