

手动步进衰减器

面板安装, 测试和测量应用

N

**概述:**

AC 系列是宽带、大功率的便携式手动步进衰减器, 其工作频率覆盖 DC-18GHz, 最大功率为 50W(CW), 衰减范围为 20-89dB, 步进量为 1dB 和 10dB。

特点:

- ⊕ 提高工作效率——集成化的设计可以适应更多测试要求
- ⊕ 提高测试精度和可重复性
- ⊕ 体积小巧, 便于携带和保管
- ⊕ 应用广泛
 - ✓ 现场测量各种发射机
 - ✓ 实验室应用
 - ✓ 配合频谱仪或者功率计使用

指标:



型号:	AC18-50-69N	
接口:	N(f)	
阻抗:	50Ω	
工作频率:	DC-18GHz	
衰减量:	0-69dB	
VSWR:	1.75 max.	
功率容量:	50W	
步进量:	1,10dB	
固有损耗:	24dB max.	
衰减偏差:	衰减值(dB)	偏差值(±dB)
	1-9	1.5
	10-19	2.0
	20-29	2.2
	30-39	2.4
	40-49	2.5
	50-59	2.9
	60-69	3.0
尺寸:	259(W)×102(H)×200(D)mm	
重量:	3.1kg	
工作温度:	0~+50°C	

订货:

P/N	描述
AC18-50-69N	手动步进衰减器,DC-18GHz,50W,20-89dB


相关产品:

P/N	描述
TC18-03-03-1000	测试电缆组件,DC-18GHz,Nm-Nm, 1 米

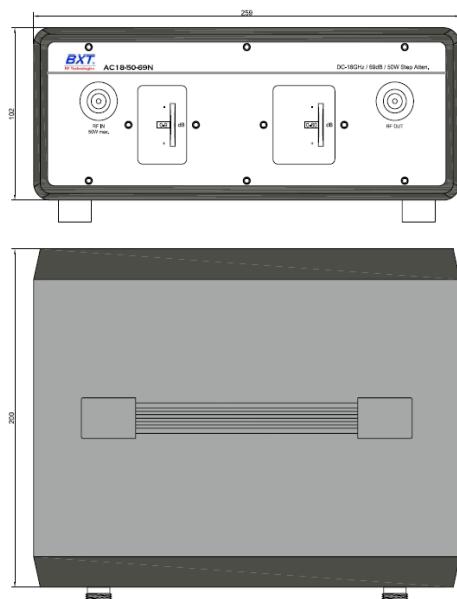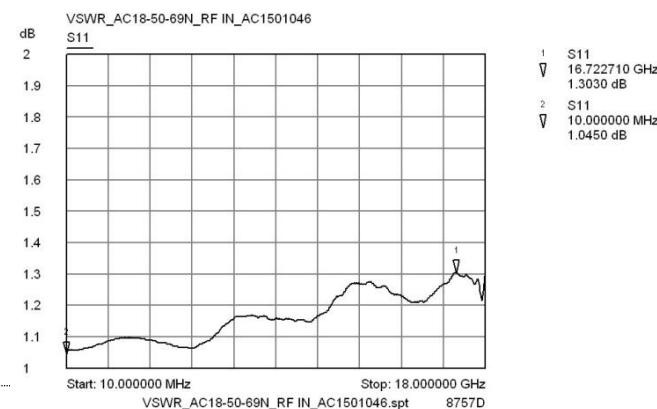
外观:**AC18-50-69N 驻波曲线:**

AC18-50-69N 的固有损耗和衰减偏差:


20dB:

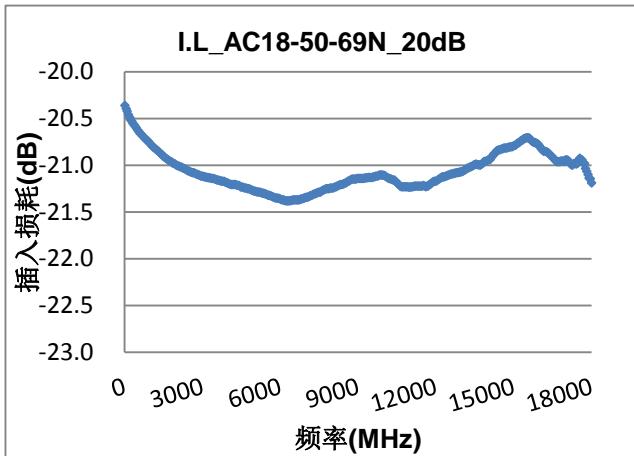


26dB:

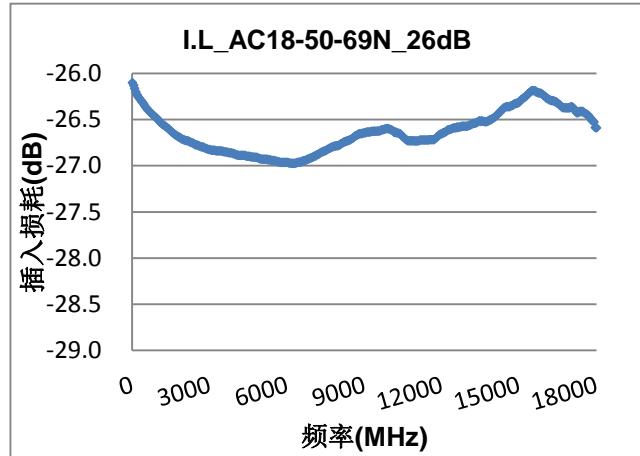


22dB:

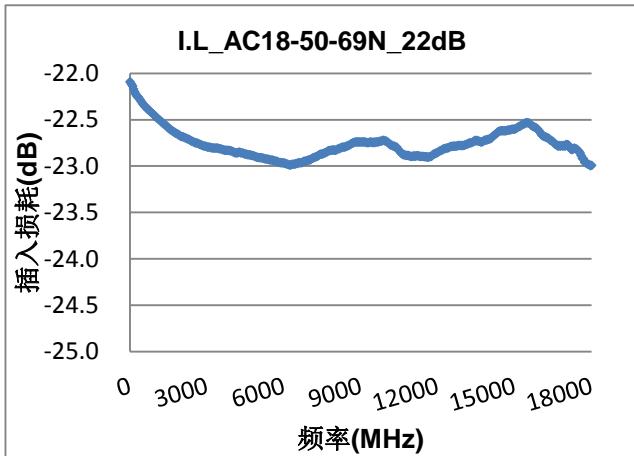


28dB:

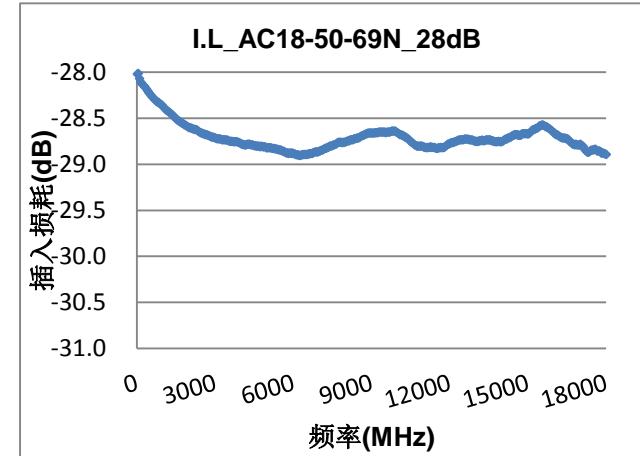

24dB:

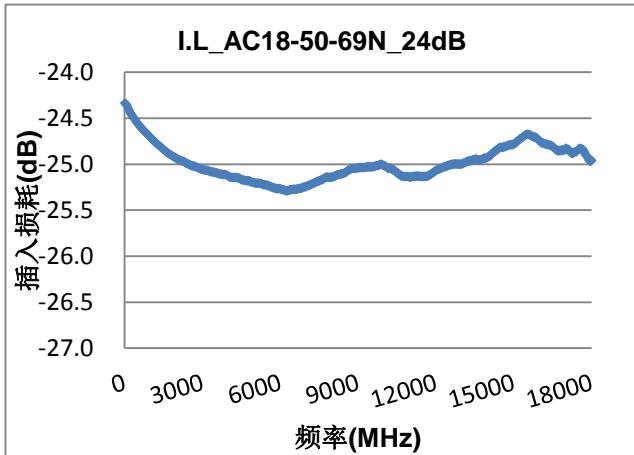

30dB:

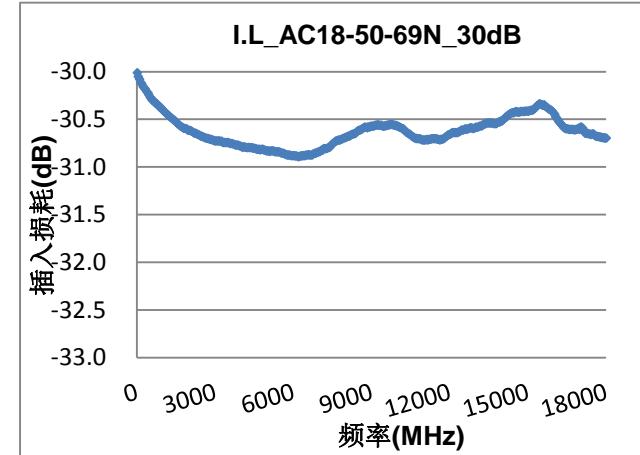


手动步进衰减器

DC-18GHz/50W


面板安装, 测试和测量应用

N


40dB:

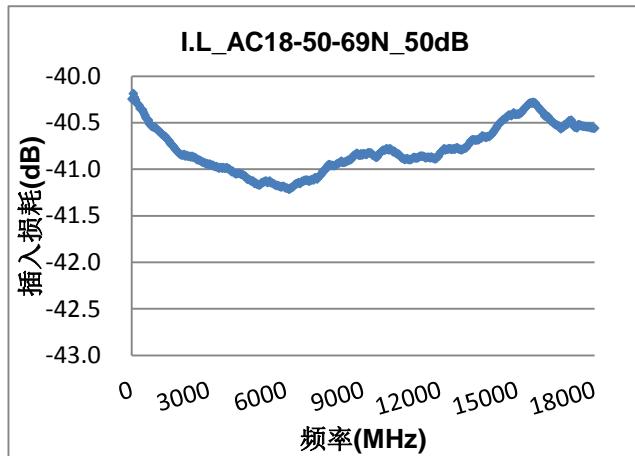


70dB:

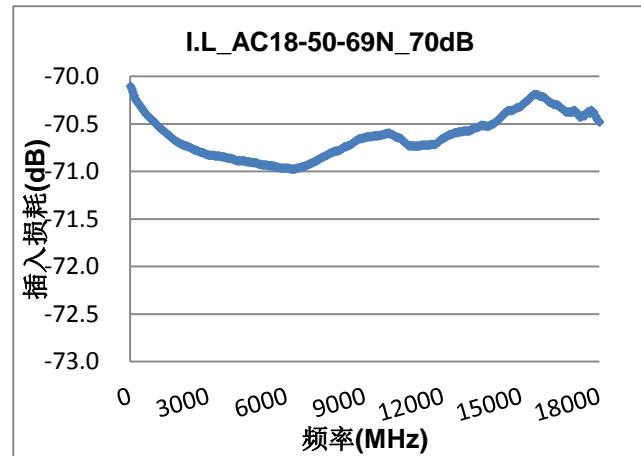

50dB:

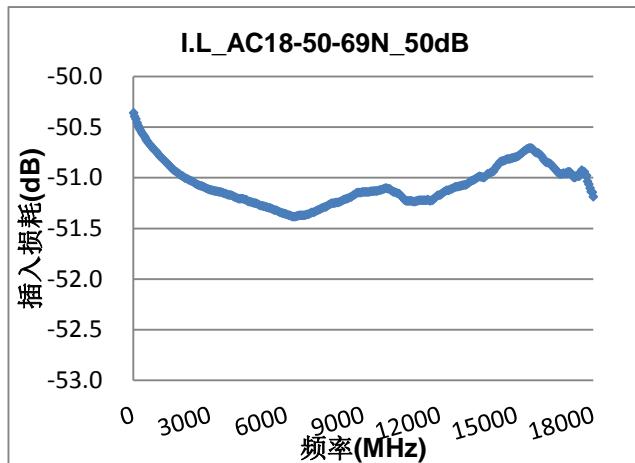

80dB:

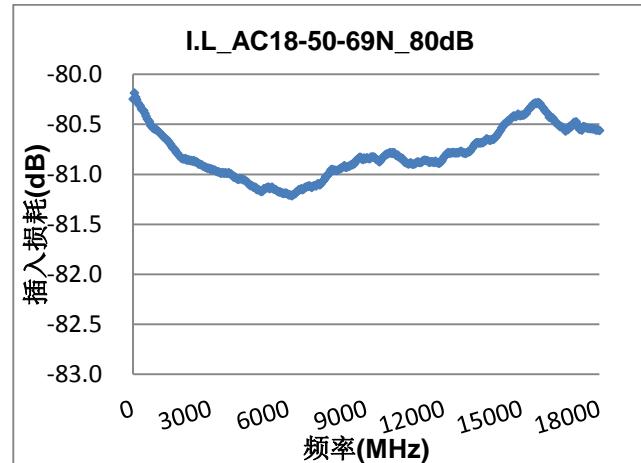

60dB:

