


Uncontrolled Drawing

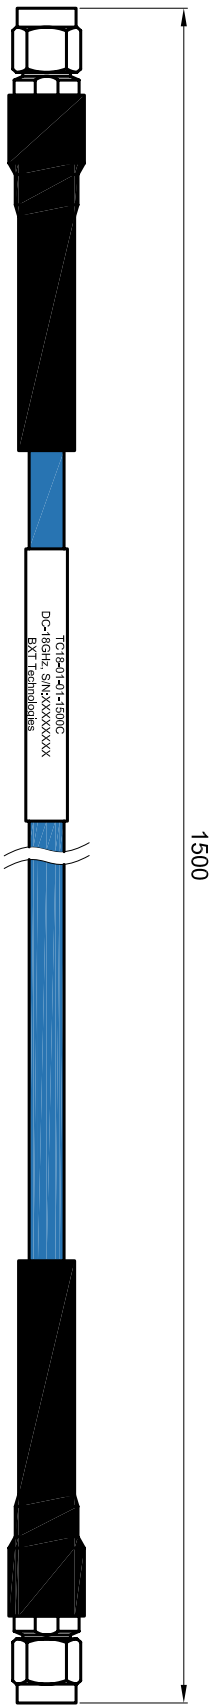

Type SMA male

Type SMA male

Specification:

- 1. Model: TC18-01-01-1500C
- 2. Nominal Impedance: 50Ω
- 3. Frequency Range: DC-18GHz, Ext. to 20GHz
- 4. VSWR: 1.10@DC-6GHz, 1.20@6-13GHz, 1.25@13-18GHz, 1.30@18-20GHz
- 5. Insertion Loss: 1.25dB@DC-3GHz, 1.80dB@3-6GHz, 2.90dB@6-13GHz, 3.90dB@13-18GHz, 5.10dB@18-20GHz
- 6. Power Capacity(sea level 25°C ambient temperature): ≤20W@18GHz
- 7. Min. One Time Bend Radius: 25.4mm
- 8. Phase stability vs Flexure: ≤±2°@18GHz; 360 degree bend, 38mm radius
- 9. Temperature Range: -50°C~+80°C
- 10. Connector: SMAm-SMAm, Stainless Steel
- 11. Length: 1.5m

参 考 信 息		制 图 / 检 查 / 批 准 / 材 料 表 达 等		图 号		505.2203					
设计	DESIGNED_ ZYY	校对	CHECKED_ ZH	审核 - 日期	APPROVED_	文 档 名	FILENAME	日 期	10/9/19	比 例	1:1
BXT Technologies						Microwave Test Cable Assembly					
RF Technologies						TC18-01-01-1500C					
Tel:0591-83789500						版 本					
www.bxt-technologies.cn						EDITION					
						图 纸					
						SHEET					