

ULTRA-BROADBAND DOUBLE-BALANCED MIXER

M4-100M10

The M4-100M10 features 100 MHz to 10 GHz ultra-broadband LO/RF performance. While other M4 mixers are limited to about 500 MHz at the low end, the M4-100M10, with its ferrite-assisted broadband balun construction, performs down to 100 MHz. The multi-decade performance of the LO/RF makes this mixer ideal for Phase Detection, Phase Noise, Amplitude Noise, Noise Figure, and other measurements requiring broad bandwidth and low IF frequencies.



Electrical Specifications - Specifications guaranteed from -55 to +100°C, measured in a 50-Ohm system.

Parameter	LO (GHz)	RF (GHz)	IF (MHz)	Min	Typ	Max	Diode Option LO drive level (dBm)
Conversion Loss (dB)	.10-10	.10-10	DC-50 50-120		7 dB 8 dB	11 13	
Isolation (dB) LO-RF LO-IF RF-IF	.10-10	.10-10			See Plots		
Input 1 dB Compression (dBm)	.10-10	.10-10			+3 +6		L (+10 to +13) M (+13 to +16)
Input Two-Tone Third Order Intercept Point (dBm)	.10-10	.10-10			+13 +16		L (+10 to +13) M (+13 to +16)

Part Number Options

Please specify diode level and package style by adding to model number.			
Package Style		Example	
M4-100M10LJ			
Connectorized	<u>J</u>	<u>M</u> -100M10 (Model)	<u>L</u> (Diode-Level)
			<u>J</u> (Package)

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com








ULTRA-BROADBAND DOUBLE-BALANCED MIXER

M4-100M10

Page 2

**LO/RF 100 MHz to 10 GHz
IF DC to 120 MHz**

Typical Performance

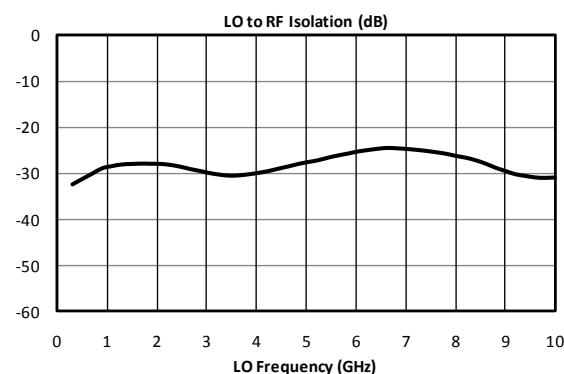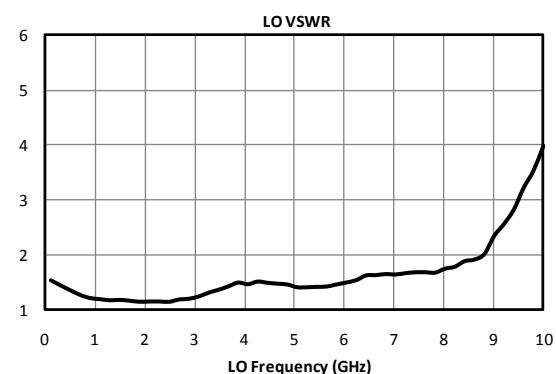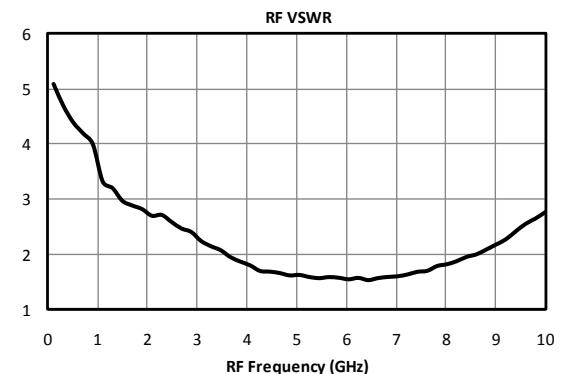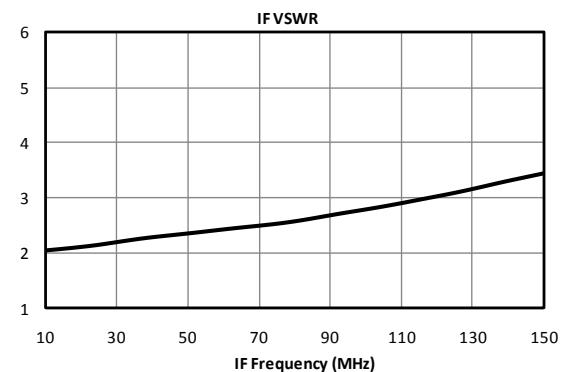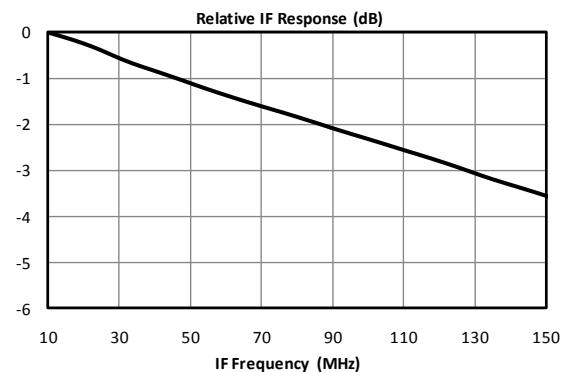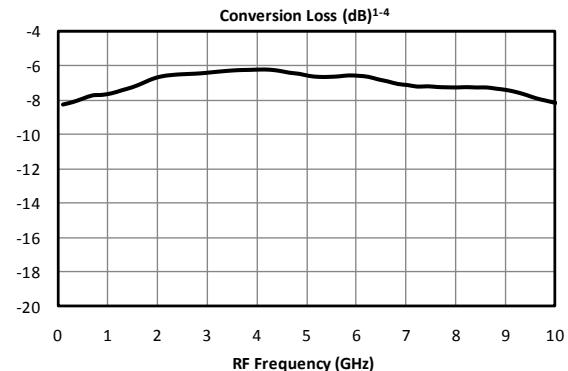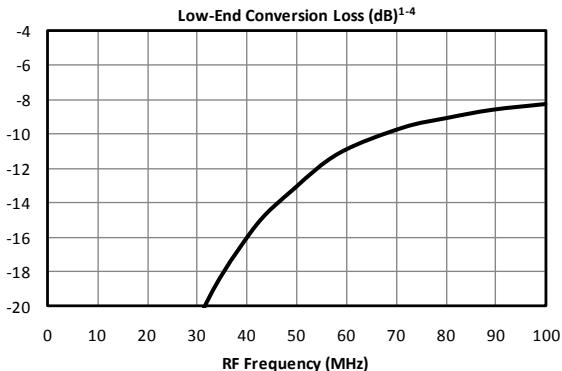







ULTRA-BROADBAND DOUBLE-BALANCED MIXER

M4-100M10

Page 3

**LO/RF 100 MHz to 10 GHz
IF DC to 120 MHz**

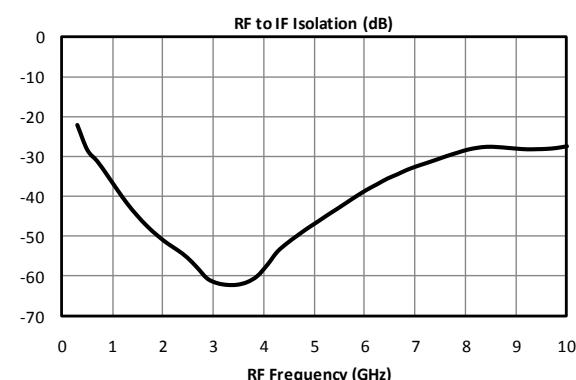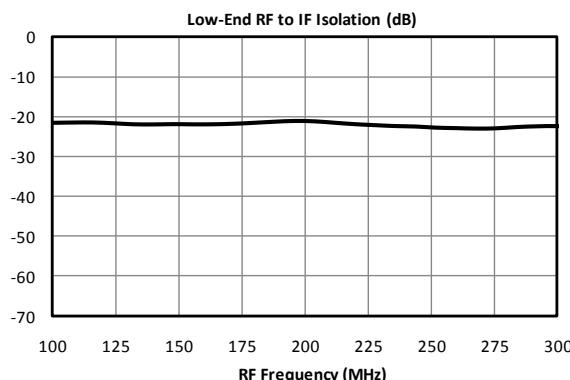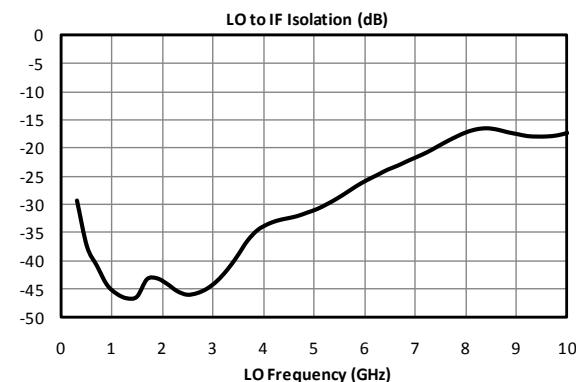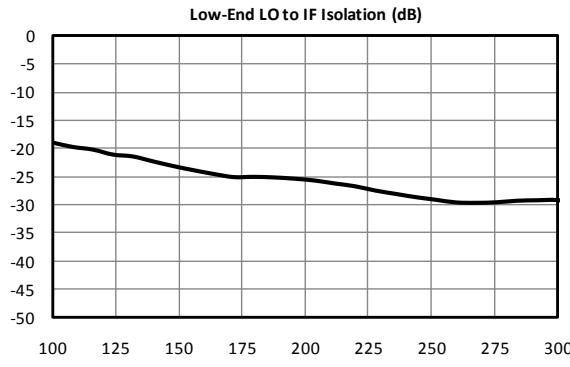

DATA SHEET NOTES:

1. Mixer Conversion Loss Plot is done with an IF frequency of 10 MHz.
2. Mixer Noise Figure typically measures within +0.5 dB of conversion loss for IF frequencies greater than 5 MHz.
3. Conversion Loss typically degrades less than 0.5 dB for LO drives 2 dB below the lowest and 3 dB above highest nominal LO drive levels.
4. Conversion Loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
5. Maximum input power is +23 dBm at +25°C, derated linearly to +20 dBm at +100°C.
6. Specifications are subject to change without notice. Contact Marki Microwave for the most recent specifications and data sheets.
7. Catalog mixer circuits are continually improved. Configuration control requires custom mixer model numbers and specifications.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com