




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

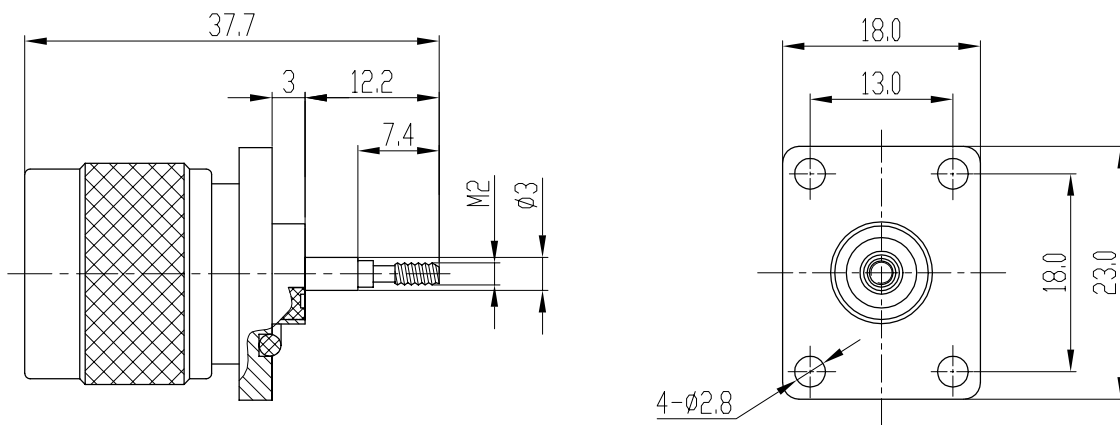

Electrical Characteristics:

- 1.Characteristic Impedance: 50Ω
- 2.Frequency range: DC~11Ghz
- 3.Contact resistance
Center conductor: $\leq 1.0\text{ m}\Omega$
Out conductor: $\leq 0.2\text{ m}\Omega$
- 4.Insulation resistance: $\geq 5000\text{ M}\Omega$
- 5.Insulator withstanding: 1500V
- 6.Durability: 500cycles

主要性能指标:

- 1.特性阻抗: 50Ω
- 2.频率范围: DC~11Ghz
- 3.接触电阻:
中心导体: $\leq 1.0\text{ m}\Omega$
外导体: $\leq 0.2\text{ m}\Omega$
- 4.绝缘电阻: $\geq 5000\text{ M}\Omega$
- 5.介质耐压: 1500V
- 6.插拔次数: 500次

Application:MIL-C-39012/1E

执行标准:MIL-C-39012/1E

Material&Finishing

- 1.Center contact :
Male:brass, gold plated
- 2.Bodies:brass, nickel plated
- 3.Insulators:PTFE
- 4.Gasket:silicone rubber

材料和镀层

- 1.中心接触件:
插针:黄铜, 镀金
- 2.壳体:黄铜, 镀镍
- 3.绝缘子:聚四氟乙烯
- 4.密封圈:硅橡胶

				SCALE		N-JFD9 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
				1.5:1			
		NAME		DATE			
DRAWN							
CHECKED						西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
APPROVED							