

Frequency Mixer

Level 4 (LO Power +4 dBm) 1200 to 2400 MHz

Maximum Ratings



Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded	

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Outline Drawing

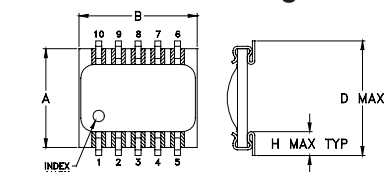

PCB Land Pattern




Suggested Layout,
Tolerance to be within ± 0.02
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F	G	H	
.250	.300	.095	.290	.050	.015	.050	.060	
6.35	7.62	2.41	7.37	1.27	0.38	1.27	1.52	
J	K	L	M	N	P	Q	R	wt
.030	.080	.300	.100	.020	.015	.070	.014	grams
0.76	2.03	7.62	2.54	0.51	0.38	1.78	0.36	0.3

Demo Board MCL P/N: TB-99
Suggested PCB Layout (PL-066)

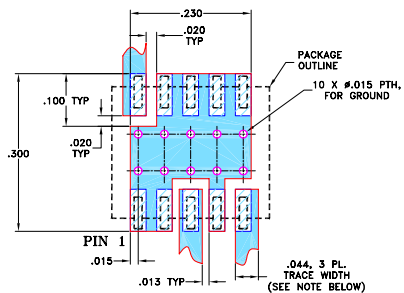

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B
WITH DIELECTRIC THICKNESS $0.020" \pm 0.0015"$.
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED
TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK
OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- excellent temperature stability
- excellent performance repeatability
- leads with strain relief
- very low cost
- ultra low height, 0.07"
- aqueous washable
- protected by US Patent 5,534,830

Applications

- wireless local loop
- PCN/PCS/wideband CDMA
- WLAN
- satellite communication
- ISM band
- PCMCIA

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF	IF								
f_L - f_U		$\overline{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	
1200-2400	DC-600	6.5	0.1	8.5	27	15	20	10	10

1 dB COMP.: 0 dBm typ.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm
1200.00	1230.00	7.05	30.80	13.30	3.79	3.71
1250.00	1280.00	7.08	30.00	14.10	3.21	3.57
1300.00	1330.00	6.41	30.10	14.90	3.06	3.50
1350.00	1380.00	6.42	29.80	16.10	2.72	3.01
1400.00	1430.00	6.02	29.60	16.80	2.49	2.76
1450.00	1480.00	6.12	29.00	17.50	2.37	2.55
1500.00	1530.00	5.89	27.90	18.70	2.25	2.37
1600.00	1630.00	5.74	27.00	20.20	1.94	1.99
1700.00	1730.00	5.56	27.50	21.70	1.73	1.66
1800.00	1830.00	5.69	27.00	22.00	1.52	1.46
1900.00	1930.00	5.64	27.00	21.70	1.35	1.25
2000.00	2030.00	5.79	27.10	21.00	1.29	1.11
2100.00	2130.00	5.78	26.50	19.90	1.26	1.03
2150.00	2180.00	5.82	25.70	19.30	1.26	1.02
2200.00	2230.00	6.01	25.60	19.10	1.32	1.02
2250.00	2280.00	6.13	25.20	18.40	1.44	1.02
2300.00	2330.00	6.43	25.30	17.60	1.64	1.02
2350.00	2380.00	6.88	25.00	17.00	1.80	1.06
2400.00	2430.00	7.16	24.60	16.30	1.87	1.09
2500.00	2530.00	6.70	24.10	14.90	1.94	1.21

Electrical Schematic

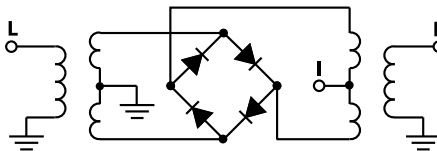

CASE STYLE: SM2
PRICE: \$6.95 ea. QTY (10-49)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.



Performance Charts

MBA-15L+ MBA-15L

