

Solid State Broadband High Power Amplifier

2031 - BBS2E3KKO

20 – 500 MHz / 100 Watts

The BBS2E3KKO (SKU 2031) is suitable for FM, VHF & UHF broadband and band specific linear applications. This amplifier utilizes push-pull MOSFET and LDMOS power devices that provide high gain, wide dynamic range, low distortions, and good linearity. Exceptional performance, long-term reliability, and high efficiency are achieved by employing advanced broadband RF matching networks and combining techniques, built in high quality power supply, EMI/RFI filters, machined housing, and qualified components. Empower RF's ISO9001 Quality Assurance Program assures consistent performance and the highest reliability.



Shown with option package 06

- Solid-state linear design
- Instantaneous ultra broadband
- Small and lightweight
- Standard front panel manual gain adjust
- Suitable for CW, AM, and FM (Consult factory for other modulation types)
- 50 ohm input/output impedance
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS @ 120V_{AC}, 25°C, 50Ω system

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	20		500	MHz
Output Power CW	P _{SAT}	100	120		Watt
Output Power @ 1dB Gain Compression	P _{1dB}	80	100		Watt
Power Gain @ 1dB Gain Compression	G _{1dB}	50			dB
Input Power for Rated P _{SAT}	P _{IN}		0		dBm
Small Signal Gain Flatness	ΔG		±1.0	±1.5	dB
Gain Adjustment Range	FGA	20	25		dB
Input Return Loss	S ₁₁			-10	dB
Noise Figure	NF			10	dB
Third Order Intercept Point 2-Tone @ 40dBm/Tone, 100kHz Spacing	IP3		+56		dBm
Harmonics @ P _{OUT} = 80W	2 ND /3 RD		-40/-15		dBc
Spurious Signals	Spur			-60	dBc
Operating Voltage (single phase)	V _{AC}	100		240	Volt
Power Consumption @ 100W CW	P _D			500	Watt

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Limits
Dimensions	19 x 3.5 x 18	Inch	Max
Weight	30	lb.	Max
RF Connectors Input/Output	Type-N, Female		
Cooling	Built-in internal forced air cooling system		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Symbol	Min	Typ	Max	Unit
Operating Ambient Temperature	T _A	0		+50	°C
Non-operating Temperature	T _{STG}	-40		+85	°C
Relative Humidity (non-condensing)	RH			95	%
Altitude (MIL-STD-810F Method 500.4)	ALT			30,000	Feet
Vibration/Shock MIL-STD-810F - Method 514.5/516.5 – Proc I	VI/SH		Airborne		

Solid State Broadband High Power Amplifier

2031 - BBS2E3KKO

20 – 500 MHz / 100 Watts

LIMITS

Input RF drive level without damage	+10 dBm	Max
Load VSWR @ P _{OUT} = 80W	∞ @ all load phase & amplitude for duration of 1 minute 3:1 @ all load phase & amplitude continuous	-
Thermal Overload	85°C shutdown	Max

AVAILABLE OPTIONS - Refer to www.empowerrf.com for detailed available options


Option	Number	Description	Price
FGA	061	Front panel manual gain adjustment 10 turns	Standard
LCD	062	Touchscreen Digital Display, including FWD/REV Power indication (dBm or Watt scale), Gain Adjustment, ALC Fast/Slow, On/Off, Standby mode, Fault indication, Rear panel HPIB/GPIB IEEE-488.2 and Half Duplex RS-232 or Full Duplex RS-422 remote interface. Note: Output Power is lowered by 0.5 - 0.75 dB with this option.	Call
FCN	051	Front Panel Type-N, Female	N/C
RCN	052	Rear Panel Type-N, Female	N/C

Available Option Packages: 03, 04, 05, 06

I/O INTERFACE CONNECTOR – D-sub 9-pin, Female

Pin #	Description	Specifications	Options	
			FGA	LCD
1	Forward Test Point	Analog Voltage 0-5V _{DC} relative to Forward Power Level		√
2	Reverse Test Point	Analog Voltage 0-5V _{DC} relative to Reverse Power Level		√
3	5V Test Point	Output +5.0V _{DC} ±0.2V	√	√
4	VVA Test Point	VVA Gain Control +5.6V _{DC} ±0.2V	√	
5	EXT Shutdown	Amplifier Disable: TTL Logic High (5V) (Internally Pulled-Low)	√	√
6	12V Test Point	Output +12.0V _{DC} ± 0.5V	√	√
7	P/S Test Point	Power Supply Output voltage +26.0-30.0V _{DC}	√	√
8&9	GND	Ground	√	√

SYSTEM OUTLINE SHOWN WITH OPTION PACKAGE 06

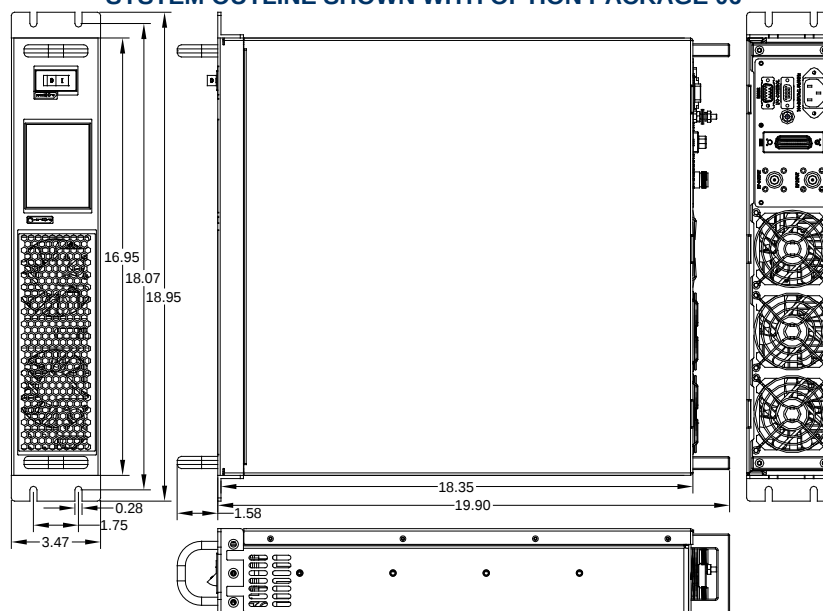

Solid State Broadband High Power Amplifier

2031 - BBS2E3KKO

20 – 500 MHz / 100 Watts

TYPICAL PERFORMANCE PLOTS


Plot 1 – Small Signal Gain and P_{1dB}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{1dB} , $P_{IN} = -3.0dBm$
 Reference: 51dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.



Plot 2 – Small Signal Gain and P_{SAT}

Top Curve: Small Signal Gain @ $P_{IN} = -20dBm$
 Middle Curve: Power Gain @ P_{SAT} , $P_{IN} = 0dBm$
 Reference: 51dB, 1dB/div.
 Bottom Curve: Input Return Loss
 Reference: 0dB, 10dB/div.

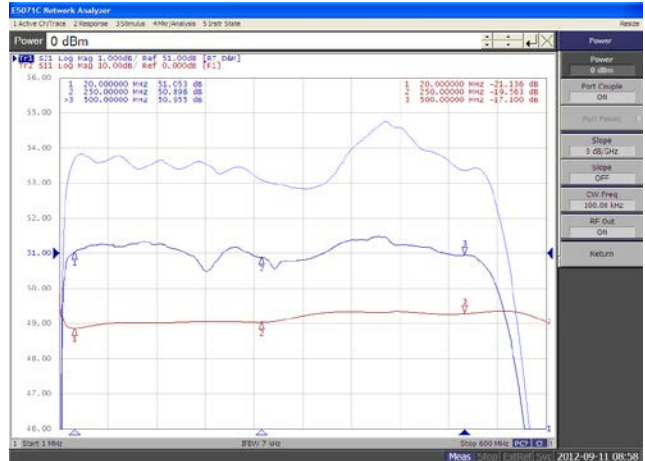

Plot 3 – Gain Adjustment Range

Top Curve: Maximum Gain @ $P_{IN} = -20dBm$
 Middle Curve: VVA @ Minimum Gain
 Reference: 20dB, 10dB/div.
 Bottom Curve: Input Return Loss @ Minimum Gain
 Reference: 0dB, 10dB/div.

