






Standards
NF C 96-315
MIL-DTL-39030

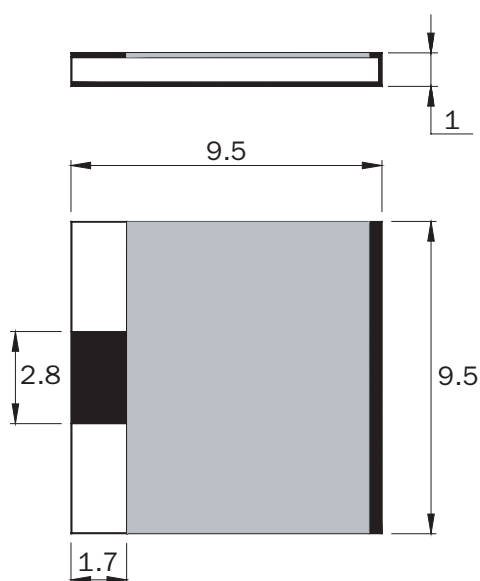

Substrate	AlN
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Silver over Nickel barrier



Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
45-0015Y	2.2	250	50	1.10
45-0059Y	0.5	250	100	1.67*

* VSWR ≤ 1.94 at 0.15GHz

mm	inch
1	0.039
1.7	0.067
2.8	0.110
9.5	0.374



Available on Tap and Reel Packaging

