


※ 型号描述 How to Order

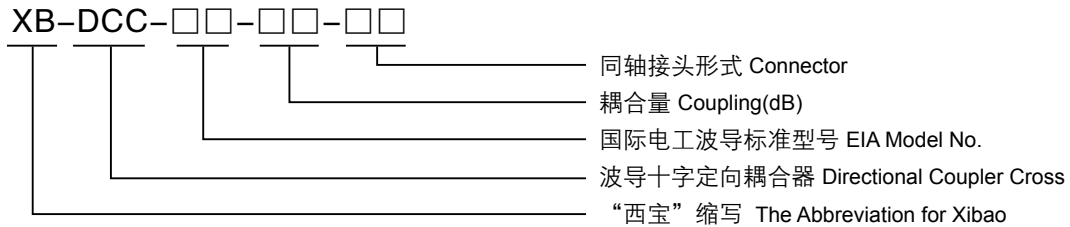

※ 型号及指标 Model & Specifications

| 型号 Model | 频率范围 Freq (GHz) | 带宽 $\Delta F/F$ Bandwidth | 法兰 Flange | 耦合量 Coupling (dB) | 驻波 VSWR (Main) | 方向性 Directivity (dB) | 接头 Connector Type |
|-----------------|-----------------|---------------------------|-------------|-------------------|------------------|----------------------|-------------------|
| XB-DCC340-□□-□□ | 1.72~2.61 | 20% | FDP/FDM | 20~50 | ≤ 1.08 | ≥ 18 | L29 / N |
| XB-DCC284-□□-□□ | 2.60~3.95 | 20% | FDP/FDM | 20~50 | ≤ 1.08 | ≥ 18 | L29 / N |
| XB-DCC229-□□-□□ | 3.22~4.90 | 20% | FDP/FDM | 20~50 | ≤ 1.08 | ≥ 18 | N |
| XB-DCC187-□□-□□ | 3.94~5.99 | 20% | FDP/FDM | 20~50 | ≤ 1.08 | ≥ 18 | N |
| XB-DCC159-□□-□□ | 4.64~7.05 | 20% | FDP/FDM | 20~50 | ≤ 1.08 | ≥ 18 | N |
| XB-DCC137-□□-□□ | 5.38~8.17 | 20% | FDP/FDM | 20~50 | ≤ 1.08 | ≥ 18 | N |
| XB-DCC112-□□-□□ | 6.57~9.99 | 20% | FBP/FBM/FBE | 20~50 | ≤ 1.08 | ≥ 18 | N |
| XB-DCC90-□□-□□ | 8.20~12.40 | 20% | FBP/FBM/FBE | 20~50 | ≤ 1.08 | ≥ 18 | N / SMA |
| XB-DCC75-□□-□□ | 9.84~15.0 | 20% | FBP/FBM/FBE | 20~50 | ≤ 1.08 | ≥ 18 | N / SMA |
| XB-DCC62-□□-□□ | 11.9~18.0 | 20% | FBP/FBM/FBE | 20~50 | ≤ 1.08 | ≥ 18 | SMA |
| XB-DCC51-□□-□□ | 14.5~22.0 | 20% | FBP/FBM/FBE | 20~50 | ≤ 1.08 | ≥ 18 | SMA |
| XB-DCC42-□□-□□ | 18.0~26.5 | 20% | FBP/FBM/FBE | 20~50 | ≤ 1.08 | ≥ 18 | SMA / APC3.5 / K |
| XB-DCC34-□□-□□ | 21.7~33.0 | 20% | FBP/FBM/FBE | 20~50 | ≤ 1.08 | ≥ 18 | APC3.5 / K |
| XB-DCC28-□□-□□ | 26.5~40.0 | 20% | FBP/FBM/FBE | 20~50 | ≤ 1.08 | ≥ 18 | K / OS2.4 |
| XB-DCC22-□□-□□ | 33.0~50.0 | 20% | UG383/U | 20~50 | ≤ 1.10 | ≥ 16 | OS2.4 |
| XB-DCC19-□□-□□ | 39.2~59.6 | 20% | UG383/U-Mod | 20~50 | ≤ 1.10 | ≥ 10 | V1.85 |

※ 以上只是常规产品，其它品种的频率覆盖范围可从 1.45~110GHz，波导型号可从 WR510 (BJ18) ~WR10 (BJ900)

※ Other Products: F=1.45~110GHz, Waveguide WR510 (BJ18)~WR10 (BJ900)