



Product Features

- E-pHEMT chip on board
- No matching circuit needed
- 30 ~ 2200MHz Wideband Amplifier
- Higher linearity
- Surface Mount Hybrid package
- CP-16A Tape & Reel Package
- Pb Free / RoHS Standard

Applications

- CATV
- Radio systems
- Satellite
- RF Sub-Systems



Package Type : CP-16A

Description

RFHIC's Low Noise Amplifier series are all hybrid LNA type products which includes all matching for the convenience of customers. WL series are a wideband LNA used for up to 4GHz. All LNA hybrids are possible to have custom frequency & spec without any additional NRE cost involved.

Electrical Specifications

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Operating Frequency	MHz	30	-	2200	-
Gain	dB	13	15.5	-	-
Gain Flatness	dB	-	1.2	1.5	30 ~ 2200MHz
Input Return Loss	dB	-	-15	-	-
Output Return Loss	dB	-	-20	-	-
1dB Compression Point	dBm	13	17	-	30 ~ 2200MHz
Output IP3	dBm	-	30	-	30 ~ 1000MHz
		-	26	-	1000 ~ 2200MHz
Noise Figure	dB	-	1.4	-	30 ~ 1000MHz
		-	1.7	-	1000 ~ 2200MHz
DC Current	mA	-	50	-	Vdd = 5.0V

Note


1. Test conditions unless otherwise noted. Test Freq = 1-500MHz, T=25℃, Vdd=5V, 50Ω system
2. OIP3 measured with 2 tones at an output power of +5dBm/tone separated by 1MHz, Test Freq = 30 and 2200MHz

Absolute Maximum Ratings


PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Supply Voltage	VDC	-	5	9	-
Operating Temperature	℃	-40	-	85	-
Storage Temperature	℃	-50	-	125	-

Typical Performance @ VDD=5V, IDS=50mA, T=25°C, 50ohm System


S-Parameter

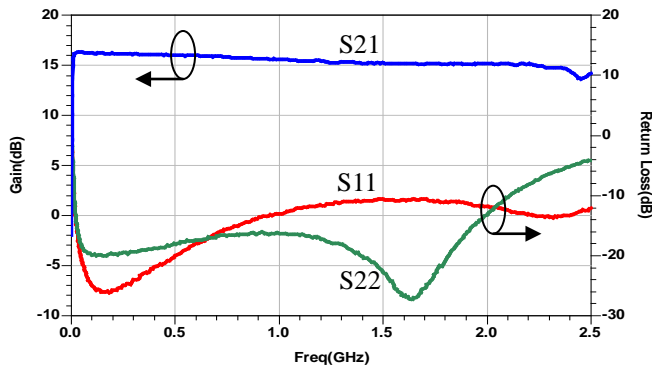


Frequency vs. Noise Figure

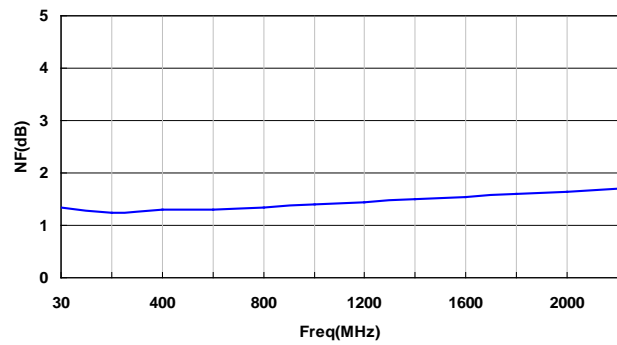


Frequency vs. P1dB

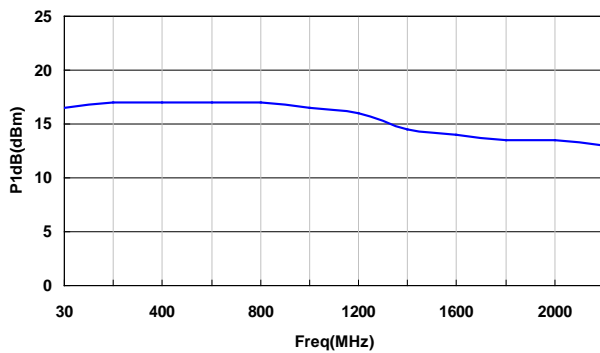

Frequency vs. OIP3

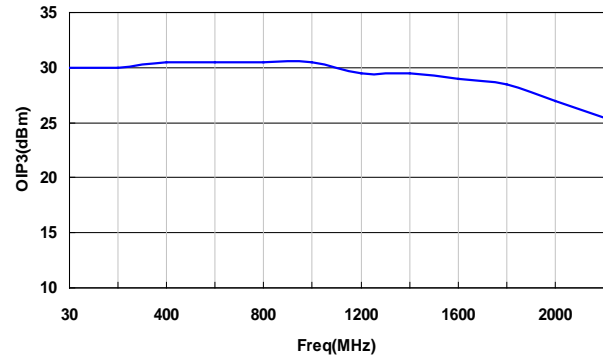

Block Diagram

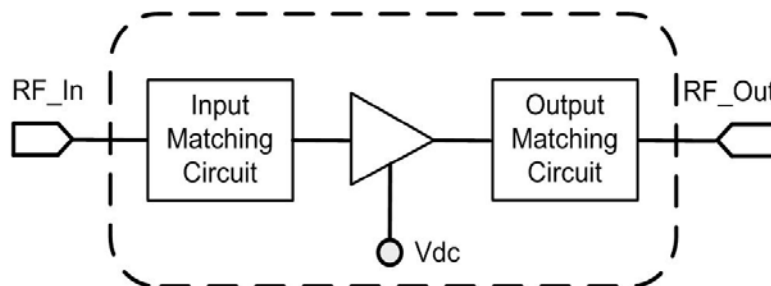


Note

1. WL Series Have internal DC blocking capacitors at the RF input and output ports.


Package Dimensions (Type: CP-16A)

* Unit: mm[inch] | Tolerance $\pm 0.15[.006]$

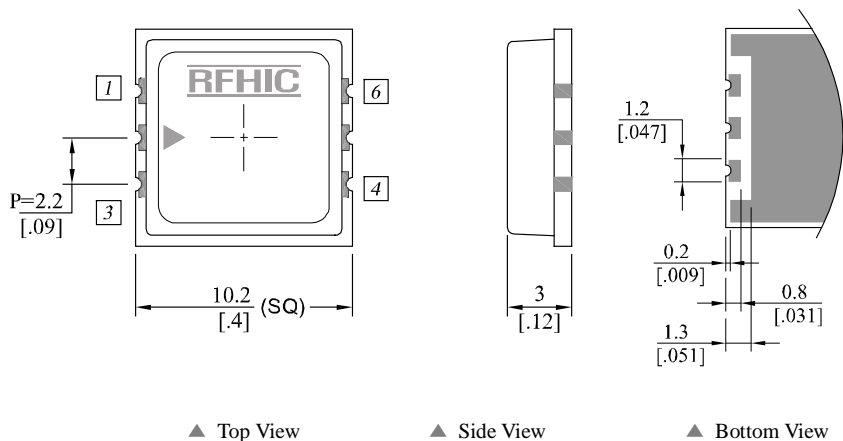


Pin Description			
Pin No	Function	Pin No	Function
1	GND	4	GND
2	Input	5	Output
3	GND	6	Vcc

Recommended Pattern

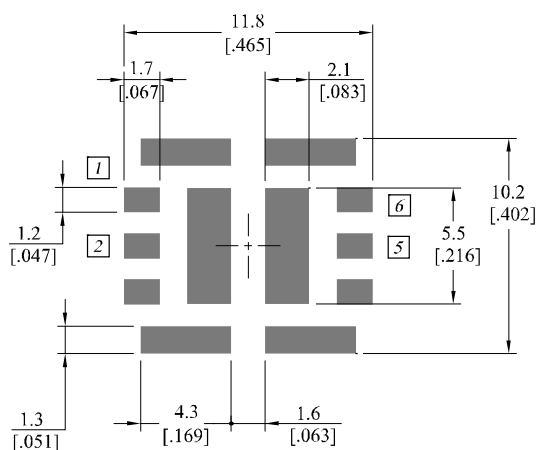

Evaluation board Layout

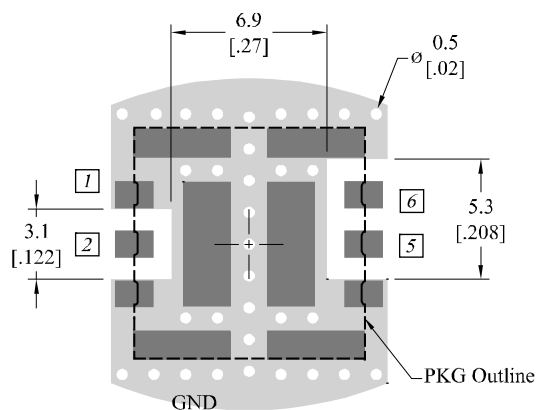

* Mounting Configuration Notes

1. Ground / thermal via holes are critical for the proper performance of this device.
2. Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
3. Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via hole region contacts the heatsink.
4. Do not put solder mask on the backside of the PCB in the region where the board contacts the heatsink.
5. RF trace width depends upon the PCB material and construction.
6. Use 1 oz. Copper minimum.

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
WL2205-L	20121010	1.0	-	-

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-250-5078.