MY85 / MY85C



Double-Balanced Mixer

Rev. V3

Features

- LO 2 TO 18 GHz
- RF 2 TO 18 GHz
- IF 0 TO 1000 MHz
- LO DRIVE: +7 dBm (NOMINAL)
- DC COUPLED I-PORT
- WIDE BANDWIDTH


Description

The MY85 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or

Ordering Information

Part Number	Package
MY85	Versapac
MY85C	SMA Connectorized

Product Image

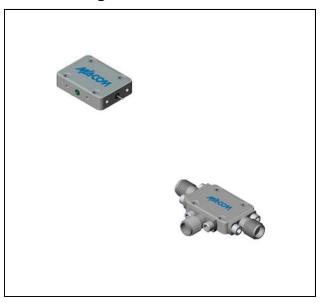

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +7 dBm (Downconverter application only)

			Typical	Guaranteed	
Parameter	Test Conditions	Units		+25ºC	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 4 to 14 GHz, fL = 3 to 15 GHz, fI = 0 to 1 GHz fR = 2 to 3 GHz, fL = 2 to 3 GHz, fI = 0 to 1 GHz fR = 3 to 18 GHz, fL = 3 to 18 GHz, fI = 0 to 1 GHz	dB dB dB	7.0 10.0 8.5	9.0 11.0 10.5	9.5 11.5 11.0
Isolation, L to R (min)	fL = 2 to 18 GHz	dB	35	22	20
Isolation, L to I (min)	fL = 2 to 18 GHz	dB	20	15	13
1 dB Conversion Comp.	fL = +7 dBm	dBm	+1		
Input IP3	fR1 =5 GHz at -10 dBm, fR2 = 5.01 GHz at -10 dBm, fL = 5.5 GHz at +7 dBm fR1=15 GHz at -10 dBm, fR2=15.01GHz at -10 dBm,	dBm	+10		
	fL = 14.5 GHz at +7 dBm	dBm	+10		

Commitment to produce in volume is not guaranteed.

[•] North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

[•] India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.




Double-Balanced Mixer


Rev. V3

Typical Performance Curves


Conversion Loss vs LO Power Level

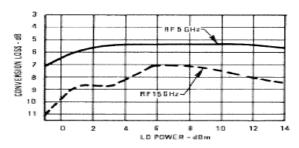


Up Conversion Loss

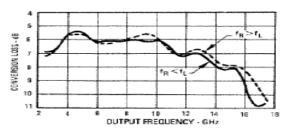



Conversion Loss

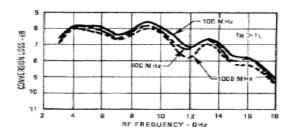

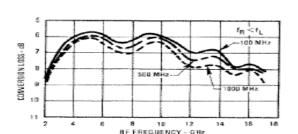


Isolation

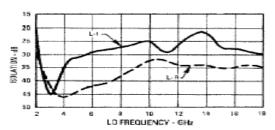

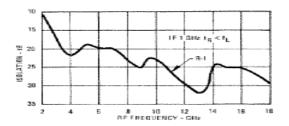


Conversion Loss over Temperature

Commitment to produce in volume is not guaranteed.

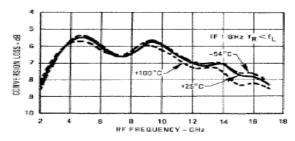

I Port Bandwidth

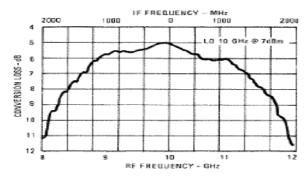

2

- North America Tel: 800.366.2266 Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588 Visit www.macomtech.com for additional data sheets and product information.




Double-Balanced Mixer


Rev. V3

Absolute Maximum Ratings


Parameter	Absolute Maximum		
Operating Temperature	-54°C to +100°C		
Storage Temperature	-65°C to +100°C		
Peak Input Power	+23 dBm max @ +25°C +20 dBm max @ +100°C		
Peak Input Current	100 mA DC		


Insertion Loss with DC Driven I-Port

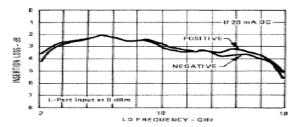

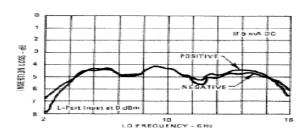


VSWR

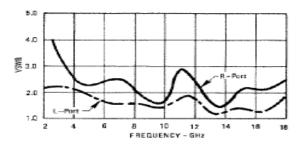


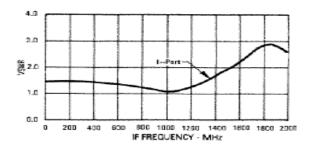

Outline Drawing: Versapac

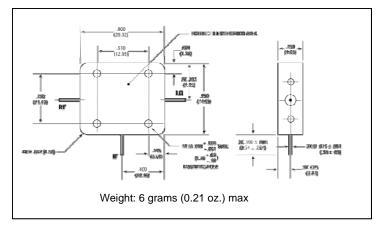

Outline Drawing: SMA Connectorized *

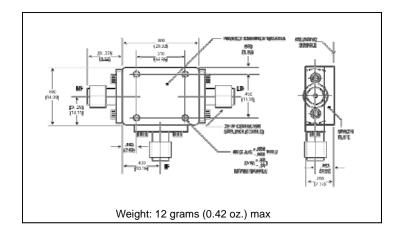

Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

- India Tel: +91.80.4155721
- China Tel: +86.21.2407.1588