

X5 Frequency Multiplier

50Ω Output 5000 to 8000 MHz

RMK-5-83+

The Big Deal

- Wideband, 5000 to 8000 MHz output
- Wide input power range, +7 to +11 dBm
- High harmonic suppression, F4, 56 dBc; F6, 58 dBc



CASE STYLE: TT1224

Product Overview

Mini-Circuits' RMK-5-83+ frequency multiplier provides a multiplication factor of 5, converting input frequencies from 1000 to 1600 MHz to output frequencies from 5000 to 8000 MHz, supporting applications such as synthesizers, local oscillators, satellite up and down converters and more. The unit provides an input power range from +7 to +11 dBm, 28 dB conversion loss, and good harmonic suppression. The multiplier comes housed in a miniature, surface-mount package (0.25 x 0.31 x 0.16") ideal for dense circuit board layouts.

Feature	Advantages
Wide bandwidth	With an output frequency range spanning 5000-8000 MHz, this multiplier covers a wide range of applications.
Very good harmonic suppression • F4, 56 dBc • F6, 58 dBc	Reduces spurious signals and the need for additional filtering.
Wide input power range, +7 to +11 dBm	Wide input power signal range accommodates different input signal levels while still maintaining a low conversion loss.
Low cost	Provides an easy, cost-effective solution for generating high-frequency signals from a lower frequency signal source.
Small size	Measuring only 0.25 x 0.31 x 0.16", the RMK-5-52+ saves space in crowded PCB layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X5 Frequency Multiplier

50Ω Output 5000 to 8000 MHz

RMK-5-83+



Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	13 dBm
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

Features

- high rejection of adjacent harmonic, 56 dBc typ.
- aqueous washable
- broadband
- low input power required

Applications

- synthesizers
- local oscillators
- satellite up and down converters

CASE STYLE: TT1224
PRICE: \$22.95 ea. QTY (10-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C


Parameter	Min.	Typ.	Max.	Unit
Multiplier Factor		5		
Frequency Range, Input (F1)	1000		1600	MHz
Frequency Range, Output (F5)	5000		8000	MHz
Input Power	7	—	11	dBm
Conversion Loss	—	28	34.5	dB
Harmonic Output*	F1	-15	-3.5	—
	F2	32	62.5	—
	F3	-15	-4.2	—
	F4	32	56.2	—
	F6	30	58.3	—
	F7	-4	10.2	—

* Harmonics of input frequency below the power level of F5

Typical Performance Data

Frequency		Harmonic Rejection Below F5, (dBc) at RF Input Power 11 dBm							
Input (MHz)	Output (MHz)	Conv. Loss (dB) F5	F1	F2	F3	F4	F6	F7	
1000.00	5000.00	25.21	-4.33	-76.63	-4.01	-72.11	-67.47	-6.22	
1020.00	5100.00	24.96	-4.35	-76.49	-4.01	-72.86	-67.84	-6.73	
1040.00	5200.00	24.84	-4.22	-76.85	-3.95	-73.05	-67.60	-7.42	
1060.00	5300.00	24.60	-4.23	-76.95	-3.97	-73.86	-67.72	-8.10	
1080.00	5400.00	24.51	-4.04	-76.48	-3.94	-74.18	-67.69	-8.77	
1100.00	5500.00	24.60	-3.78	-76.76	-3.45	-75.15	-67.11	-9.55	
1120.00	5600.00	24.63	-3.45	-76.11	-3.22	-75.79	-66.93	-10.59	
1140.00	5700.00	24.51	-3.37	-75.54	-3.04	-77.22	-66.71	-11.61	
1160.00	5800.00	24.96	-2.69	-75.06	-2.33	-77.29	-66.21	-11.70	
1180.00	5900.00	25.44	-2.08	-73.74	-1.59	-76.38	-65.83	-12.25	
1200.00	6000.00	25.43	-1.88	-72.93	-1.14	-74.19	-58.63	-13.37	
1250.00	6250.00	28.37	6.80	-65.69	2.44	-67.94	-65.54	-13.75	
1300.00	6500.00	28.77	7.37	-65.24	3.82	-65.97	-66.85	-15.02	
1350.00	6750.00	28.87	7.71	-66.48	4.70	-65.80	-66.77	-15.98	
1400.00	7000.00	29.03	8.15	-65.80	5.66	-66.60	-65.53	-15.79	
1450.00	7250.00	29.31	8.79	-64.33	6.77	-67.08	-62.27	-13.97	
1500.00	7500.00	30.12	10.02	-63.85	8.06	-66.23	-58.72	-11.94	
1520.00	7600.00	29.97	10.03	-64.10	8.17	-66.82	-58.06	-11.86	
1540.00	7700.00	30.22	10.46	-63.86	8.46	-66.92	-56.64	-11.36	
1560.00	7800.00	30.27	10.59	-63.90	8.69	-66.50	-56.26	-11.19	
1580.00	7900.00	30.51	11.15	-63.42	9.12	-65.90	-55.95	-10.83	
1600.00	8000.00	30.45	11.29	-62.96	9.28	-65.77	-55.63	-10.79	


Outline Drawing

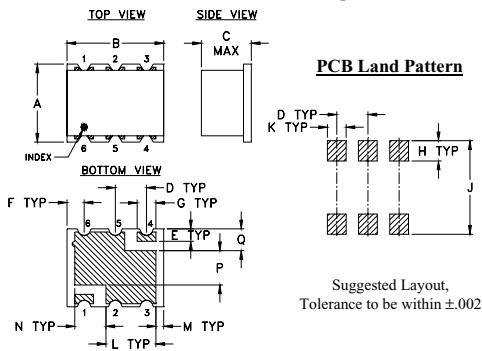

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

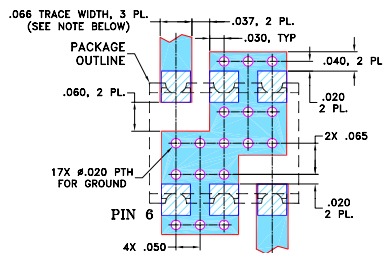

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes








- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M136843
ED-14642
RMK-5-83+
AV/CP/AM
140221
Page 2 of 3

RMK-5-83+

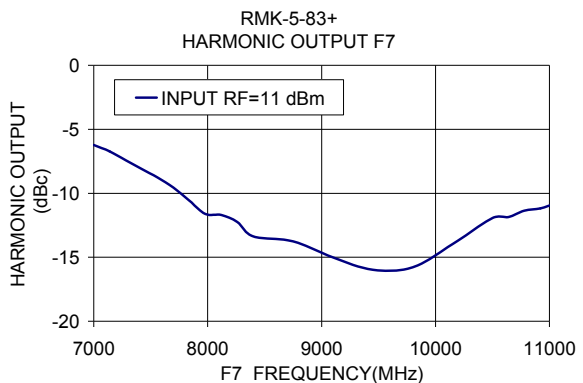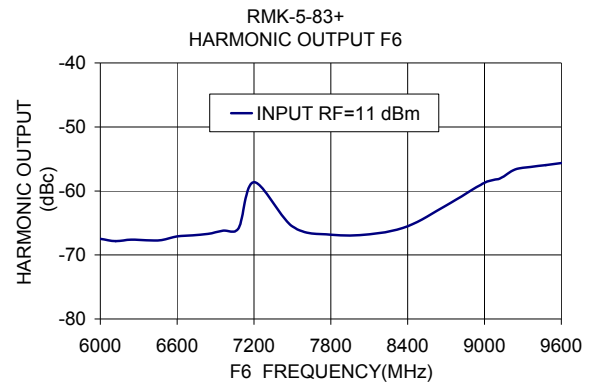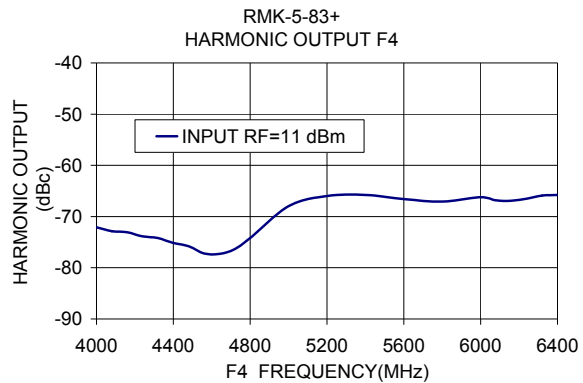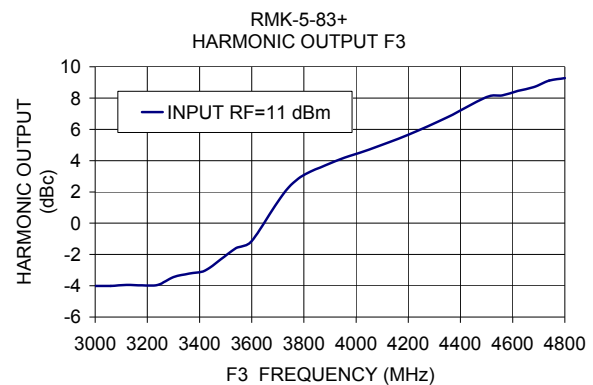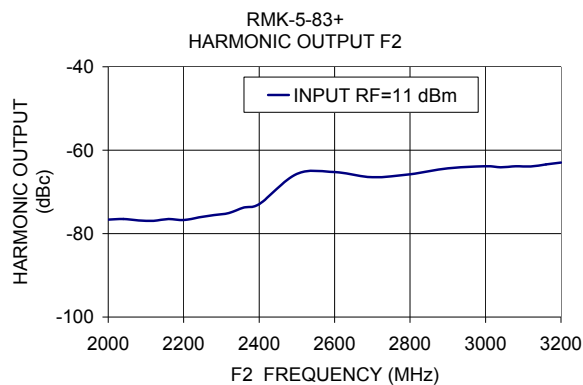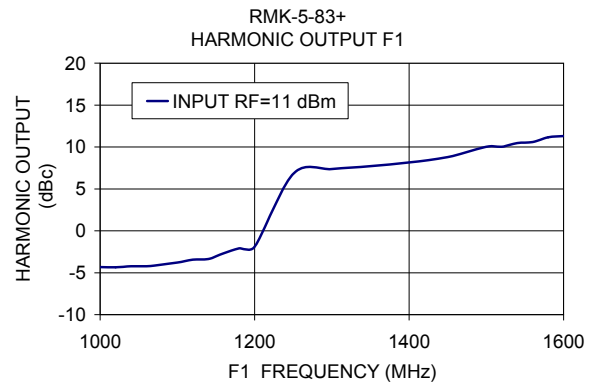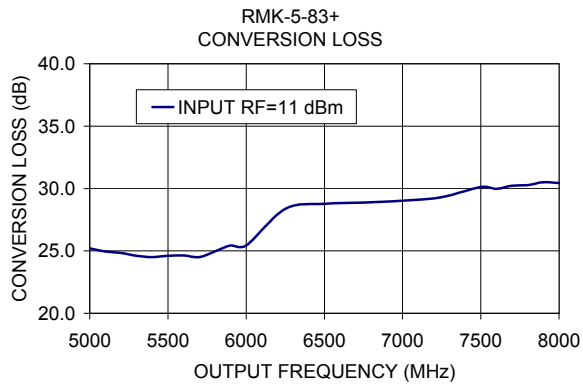

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

