

Ku-Band Redundant Block Upconverter Systems

BRKU1 Series


Introduction

BRKU1 Series Ku-Band Redundant Block Upconverter (BUC) systems contain either three converters in a 1:2 redundant configuration or two converters in a 1:1 redundant configuration. The systems include automatic switchover logic, redundant power supplies, and redundant ac line inputs. The systems are designed for installation at satellite earth stations in standard 19-inch EIA equipment racks. The systems are designed to house BU-Series Ku-Band Block Upconverters.


Features

- Standard 19" rack panel, 3.5" high
- Dual redundant power supplies
- Worldwide AC input capability
- Monitors converter bias currents and phase lock to external reference
- Manual or automatic operation
- Manual override switch control knobs on rear panel
- Serial I/O
- Offline I/O
- Frequency reference that is stable to ± 20 ppb in stand-alone operation
- 10.0 MHz external reference

1:1 FRONT AND REAR PANELS:

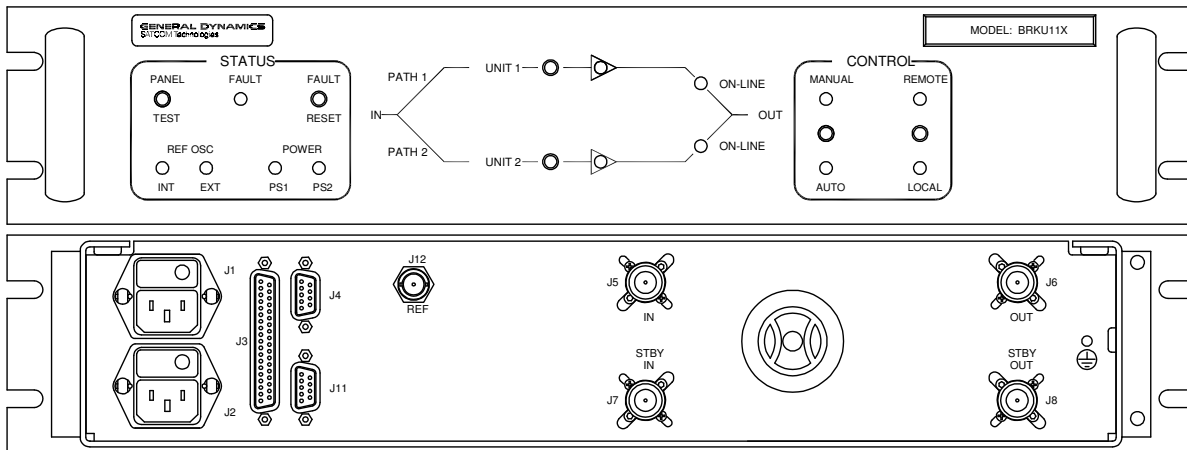

1:2 FRONT AND REAR PANELS:

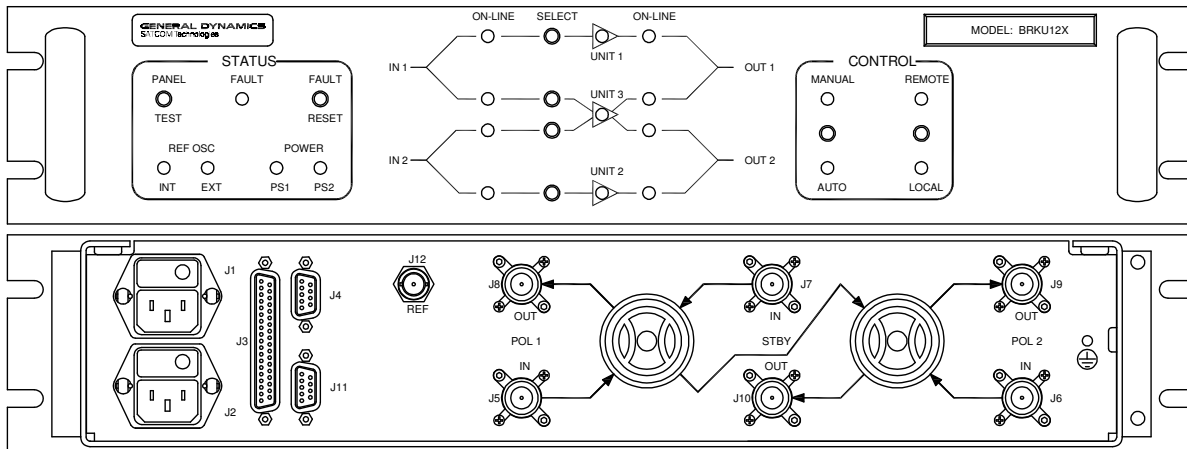

- *Automatic Mode*
In Automatic mode, if a failure is detected in an on-line converter, the standby converter is switched on line. Typical switchover time is 100 milliseconds. For 1:2 systems, in the case that both on-line converters fail, priority is selectable to either Pol 1 or Pol 2. For either 1:1 or 1:2 systems, the unit will not automatically switch to a defective converter.

- *Manual Mode*

The systems include provision for remote status monitoring and operation. Typical uses are for sending status information to a centralized monitor and control system or for remotely controlling the system from a nearby building. All Local front panel features can be remotely controlled and monitored, except for the Remote/Local switch. In Remote mode, the front panel controls are inoperative, but the indicators continue to reflect the current operating state of the system. Remote status outputs are Form 'C' dry relay contacts capable of switching up to 100 Vdc at 100 mA. Remote control inputs are opto-isolator coupled for noise and common mode ground loop rejection.

Parameter	Notes	Min.	Nom./Typ. [†]	Max.	Units
Configuration	BRKU11 _ systems BRKU12 _ systems	1:1, One standby BUC for one main BUC 1:2, One standby BUC for two main BUCs			
Input Frequency Range	BRKU1 _ A systems	950		1450	MHz
	BRKU1 _ B systems	950		1700	MHz
Output Frequency Range	BRKU1 _ A systems	14.00		14.50	GHz
	BRKU1 _ B systems	13.75		14.50	GHz
System Gain		17			dB
Gain Flatness	Full band		±1.0	±1.5	dB
Gain Match	Between BUCs			±1.0	dB
Noise Figure	At +23 °C		16	20	dB
Power Output	At 1 dB compression (P _{1 dB})	+8	+10		dBm
Third Order Intercept	Output, OIP ₃	+18	+20		dBm
Phase Noise	@ 100 Hz offset			-60	dBc/Hz
	@ 1 kHz offset			-70	dBc/Hz
	@10 kHz offset			-80	dBc/Hz
	@100 kHz offset			-90	dBc/Hz
	@ 1 MHz offset			-100	dBc/Hz
Group Delay	Linear		0.03		ns/MHz
	Parabolic		0.003		ns/MHz ²
	Ripple			1.0	ns p-p
VSWR	Input (50 ohms)		1.50	2.00	:1
	Output (50 ohms)		1.20	1.25	:1
Connectors	RF input and output	Type N Female (50 ohms)			
	External reference	Type BNC Female (50 ohms)			
	Remote input	9-pin D Male			
	Alarm output	37-pin D Male			
	Serial I/O (RS-232/-422/-485)	9-pin D Female			
Operating Modes		Manual or Automatic			
Alarm Method	BUC phase lock/bias current	Alarm is generated if phase lock is lost or current draw is outside tolerance window			
Alarm Output	Form 'C' contacts	100 Vdc / 100 mA			
Remote Inputs	Control inputs	Contact closure to ground; withstand 5 V, sink 5 mA			
External Reference (10.0 MHz)	Level	0		+15	dBm
	Impedance		50		ohms
	Phase Noise @ 10 Hz offset			-105	dBc/Hz
	@ 100 Hz offset			-135	dBc/Hz
	@ 1 kHz offset			-145	dBc/Hz
Power Requirements	@ 10 kHz offset			-150	dBc/Hz
	Voltage (autoranging)		90–135 or 175–264		Vac
	Frequency	47		63	Hz
Size	Power		30		W
			19 x 3.47 x 24 483 x 88.1 x 610		inches mm
Temperature Range	Operating	0		+50	°C

* Specifications shown are for BU-Series BUCs. See product data sheet 16971 for spurious levels.

† When there is only one value on a line, the Nom./Typ. column is a nominal value; otherwise it is a typical value. Typical values are intended to illustrate typical performance, but are not guaranteed.

Part Number/Ordering Information, Ku-Band Redundant Block Upconverter Systems

BRKU1

System Type:	1:1	1
	1:2	2
Frequency Band (In / Out / LO)	950–1450 MHz / 14.00–14.50 GHz / 13.05 GHz	A
	950–1700 MHz / 13.75–14.50 GHz / 12.80 GHz	B

Examples:

- 1:1 system with 950–1450 MHz input, 14.00–14.50 GHz output
- 1:2 system with 950–1700 MHz input, 13.75–14.50 GHz output

Order Number

BRKU11A

BRKU12B

Other Products

- Solid-State Power Amplifiers and SSPA Systems
- Solid-State Power BUCs and SSPB Systems
- Low Noise Amplifiers and LNA Systems
- Low Noise Block Converters and LNB Systems
- Block Up and Block Down Converters
- Synthesized Converters
- Line Drive Amplifiers
- Power Supply Monitors
- Redundant Control Panels for SSPAs, SSPBs, and LNAs

GENERAL DYNAMICS SATCOM Technologies

60 Decibel Road, Suite 200 • State College, PA 16801 USA • Tel. +1-814-238-2700 • FAX +1-814-238-6589
Email: satcom@gd-ms.com • www.gdsatcom.com/electronics.php

19381 Rev. B

© 2015 General Dynamics. All rights reserved. General Dynamics reserves the right to make changes to its products and specifications at any time and without notice. All trademarks indicated as such herein are trademarks of General Dynamics. All other product and service names are the property of their respective owners.