



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5304029

**700-2800 MHz
30 WATTS
LINEAR POWER RF AMPLIFIER**

Solid State Broadband High Power RF Amplifier

The 5304029 is a 30 Watt broadband amplifier that covers the 700-2800 MHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.


Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR_{RF} amplifiers, the 5304029 comes with an extended multiyear warranty.

	Parameter	Specification @ 25° C
<u>Electrical</u>		
1	Frequency Range	700-2800 MHz
2	Output Power CW (P _{SAT})	30 Watts Min
4	Small Signal Gain	+50 dB min
5	Gain Flatness	± 2.0 dB max
6	IP ₃	+54 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-25 dBc typical
9	Spurious Signals	< -60 dBc typical
10	Noise Figure	< 10 dB
11	Input/Output Impedance	50 Ohms nominal
12	DC Input	28 VDC nominal
13	RF Input	+0 dBm max
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A/AB
<u>Mechanical</u>		
16	Dimensions	3.0" x 5.7" x 1.5"
17	Weight	2.0 lb. max
18	Connectors	(RF Input) SMA female (RF Output) N female DC & Control Connector 9 Pin Combo D-Sub
19	Grounding	Chassis
20	Cooling	Adequate Heatsink Required
<u>Environmental</u>		
21	Baseplate Temperature	-40° C to +85° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 40,000' Above Sea Level
24	Shock and Vibration	MIL-STD-810F (Method 516.5)

Specifications subject to change without notice

Available Features

- ◇ Variety of Custom Mechanical Configurations
- ◇ Expanded Frequency Range
- ◇ Customer Specific RF and DC Connections

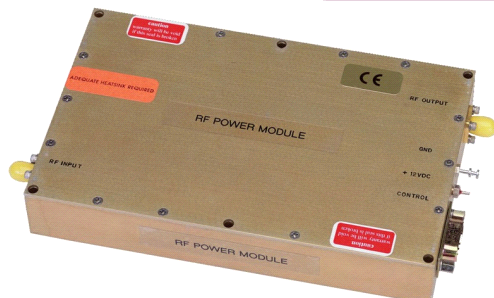

DC Blanking

- ◇ Rise/Fall Time < 10uSec