



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

PCS Ceramic BPF

Part Number: AM1880B263



Electrical specifications

Center Frequency: 1880 MHz

Bandwidth: 60 MHz

Input / Output Impedance: 50 Ohms

Passband: 1850-1910 MHz

Passband Insertion Loss: 1850-1910 MHz 1.9 dB

Passband Ripple: 1850–1910 MHz 0.8 dB max

Passband Return Loss: 1850–1910 MHz 10 dB

Rejection: 1780 MHz 15 dB min

Rejection 2: 1980 MHz 15 dB min

Power Handling: 1 Watt max

Mechanical

Mounting Method: SMT

Dimensions: 7.05 x 5.9 x 4.0 mm

Environmental


Operating Temperature: -30°C to +70°C

Storage Temperature: -50°C to +90°C



This product is RoHs compliant.

Mechanical Drawing

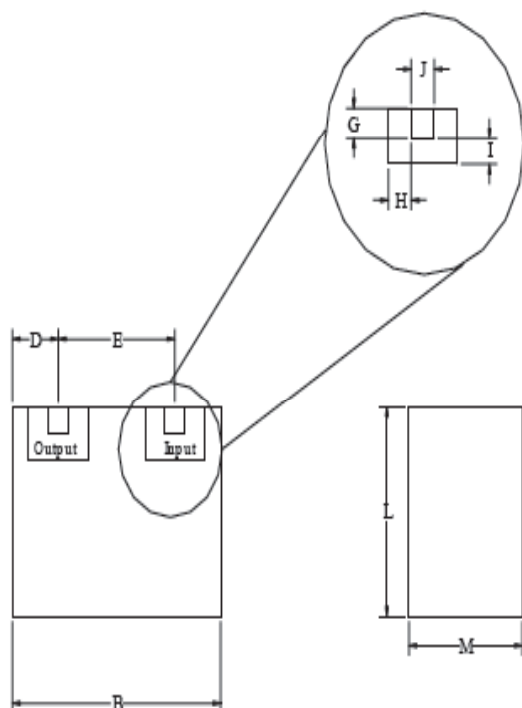

Dim	Nominal (mm)	Tolerance (mm) +/- or max
A		
B	7.05	max
C		
D	1.55	0.25
E	3.86	0.13
F		
G	0.66	0.13
H	0.66	0.13
I	0.66	0.13
J	0.66	0.13
K		
L	5.9	max
M	4.0	max



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

PCS Ceramic BPF
Part Number: AM1880B263



Response Plot:

