


Features

- 3 wire serial Fractional PLL
- Compact Size (0.75"x0.75"x0.23")
- Very Low phase noise (typ. -110@10kHz)
- Programming : ADF4118(ADI)

Applications

- SATCOM radio link
- Receiver
- Test Equipment
- Radar
- Point-to-Point radio
- MMDS
- WiMAX

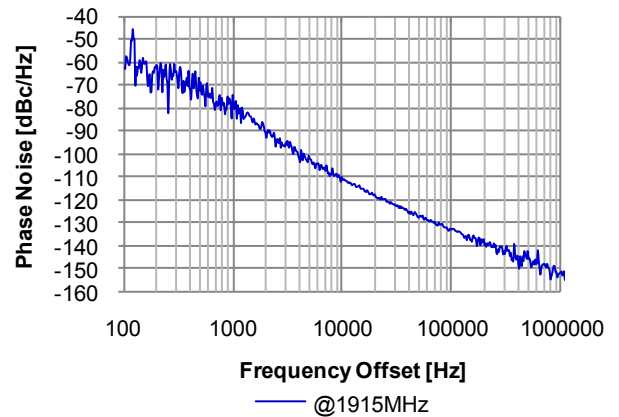


Electrical Characteristics




Parameter	Units	Min	Typ	Max
Operating Frequency Range	MHz	1900		1930
Step Size	kHz		125	
Settling Time	msec		10	30
Output Power	dBm	-1.0	+1.0	+3.0
Output Impedance	Ω		50	
Phase Noise	@1kHz offset		-79	-74
	@10kHz offset		-110	-105
	@100kHz offset		-132	-127
	@1MHz offset		-151	-146
2nd Harmonic Suppression	dBc		-33	-20
Sideband Spurious Suppression	dBc			-70
Reference	Input Frequency	MHz	5	100
	Input Level	dBm	-5	+5
VCO Power Supply (Vcc)	Voltage	Vdc	5	
	Current	mA	31	40
PLL Power Supply (Vcp)	Voltage	Vdc	5	
	Current	mA	5	10
Operating Temp. Range	$^{\circ}\text{C}$	-40		+85

Dimensions

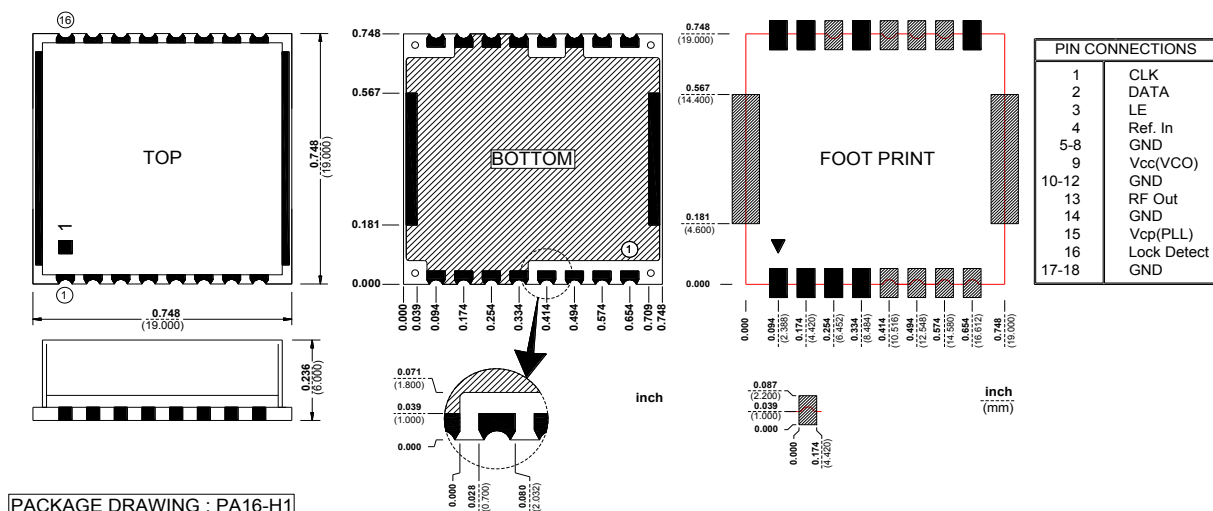

Harmonic Suppression

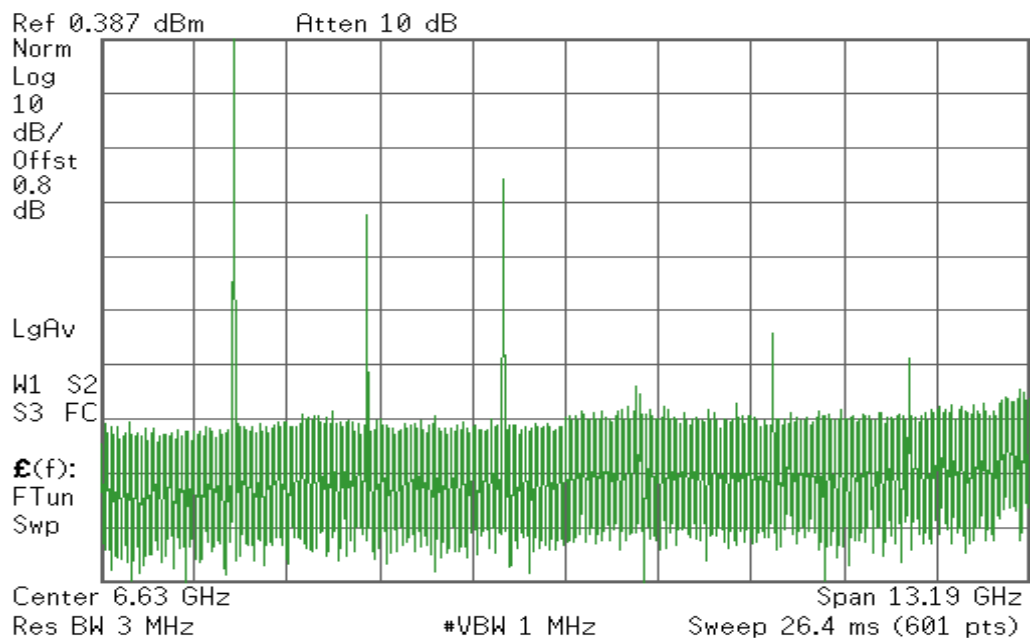

Sideband Spurious Suppression

