

Ceramic Balun RF Transformer

50Ω 700 to 1400 MHz

TCN2-14+
TCN2-14



Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Input RF Power** 5W

** From 85°C derate linearly to 2.5W at 100°C
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

PRIMARY DOT 4



PRIMARY (GND) 2,5

SECONDARY DOT 1


SECONDARY 6

NOT USED 3

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (Inch)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020

Demo Board MCL P/N: TB-287 Suggested PCB Layout (PL-163)



- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 700 to 1400 MHz
- miniature size, 0.12"x.06"x.037"
- LTCC construction
- low cost
- aqueous washable

Applications

- TDMA, CDMA
- GSM
- PDC
- WAN
- TACS
- AMPS, NAMPS

Electrical Specifications (T_{AMB} = 25°C)

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
2	700-1400	0.8	8.0	0.7
	800-1000	0.5	8.0	0.3


* Insertion Loss is referenced to mid-band loss, 0.9 dB

† Relative to 180°


Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
700.00	1.01	10.56	0.71	6.90
750.00	1.01	10.63	0.48	7.89
800.00	1.01	10.75	0.28	8.23
850.00	1.01	10.95	0.10	8.15
900.00	1.02	11.08	0.06	7.79
950.00	1.03	11.29	0.20	6.89
1000.00	1.03	11.38	0.31	5.81
1200.00	1.08	11.27	0.57	0.76
1300.00	1.13	10.80	0.54	4.35
1400.00	1.21	10.23	0.40	7.76


TCN2-14
INSERTION LOSS

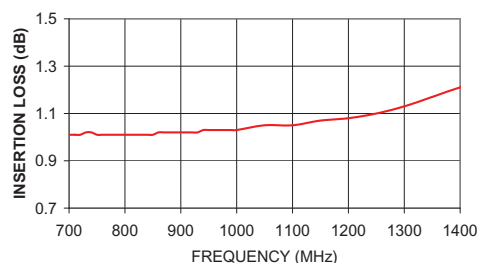


TCN2-14
AMPLITUDE UNBALANCE

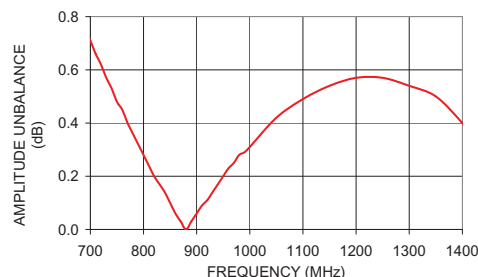

TCN2-14
PHASE UNBALANCE

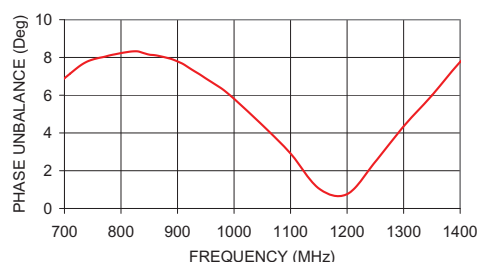

configuration G



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M123210
TCN2-14
ED-11687/3
DJ/RS/CP/AM
130307