

SMA-M PLUG RG58 RG141 CRIMP

SC7058

SPECIFICATIONS

ELECTRICAL:





FREQUENCY: 0-12.4 GHZ
VSWR 1.3:1 MAX
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C- +155C

MECHANICAL:

MATERIAL BODY: PASS. STAINLESS STEEL
CENTER CONTACT: BRASS
CONTACT PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON
INTERFACE: MIL-STD-348A

TORQUE: 7-10 IN-IBS

ROHS COMPLIANT

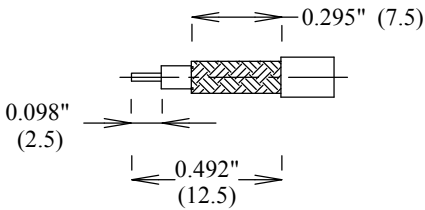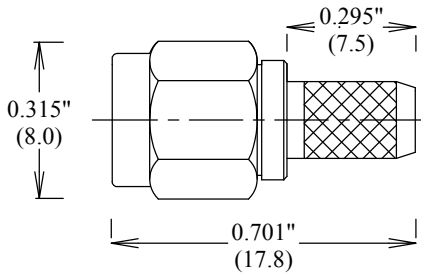

STRIPPING DIMENSION

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA-M PLUG RG58 RG141 CRIMP

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC7058	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical