
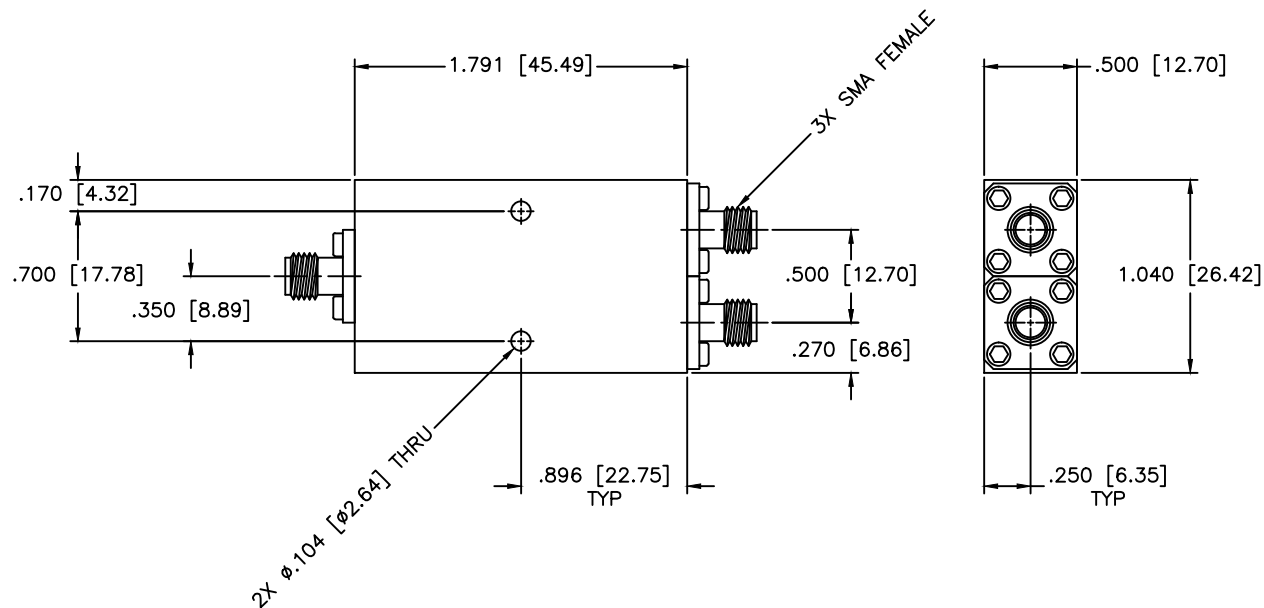


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SPECIFICATIONS

Frequency Range: 2–26.5 GHz
 VSWR: 1.60:1 Max.
 Amplitude Balance: ± 0.3 dB Max.
 Phase Balance: ± 3 Deg. Max.
 Insertion Loss: 1.2 dB Max.
 Isolation: 19 dB Min.
 Power: 10W Avg, Peak 3kW
 Operating Temperature: -32°C to $+85^{\circ}\text{C}$

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^{\circ}$		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 04-27-2011		DRAWING TITLE: 2-WAY POWER DIVIDER		
APPROVED: T. Nguyen DATE: 04-27-2011		PART NO. PS2-14		
CAGE CODE: OD2L5		SIZE: A	REV: B	DWG NO. 82454
THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING		