



4 Way High Power Broadband Combiner From 2 GHz to 6 GHz Rated at 400 Watts, Type N

TECHNICAL DATA SHEET

PE20S0017

PE20S0017 is a passive 4 way High Power Broadband RF Combiner with 50 ohm N connectors operating from 2000 to 6000 MHz, with a max input power at 400 watts. The PE20S0017 has a less than 0.80 dB typical low insertion loss and a Max VSWR of 1.30:1; along with a phase balance of ± 5 degrees and an amplitude balance of ± 0.3 dB. The RF Combiner operates in a temperature range from -55°C to 85°C, with a foot print of 4.51"x2.96"x1.10".

Features

- 2000 to 6000 MHz Frequency
- 400 watt max power
- Insertion Loss: < 0.80 dB
- Phase Balance: ± 5 degrees
- Amplitude Balance: ± 0.30 dB
- High Power Handling Capability

Applications

- Communications Systems
- Power Combining
- PCS, GSM, LTE, Cellular
- Amplifier Systems
- Amplifier Power Combining
- Wireless Infrastructures
- Defence Applications

Configuration

Input Connectors	N Female
Output Connector	N Female
Frequency Range	2 to 6 GHz
Design	Reactive
Number of Input Ports	4
Housing Material and Plating	Aluminum Alloy

Electrical Specifications (Values at 25°C, sea level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		6	GHz
Impedance		50		Ohms
Insertion Loss			0.8	dB
Input Power			400	Watts
Output VSWR			1.3:1	
Phase Balance		± 5		Degrees
Flatness		± 0.3		dB

Mechanical Specifications

Temperature

Operating Range

-55 to +85 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 2 GHz to 6 GHz Rated at 400 Watts, Type N PE20S0017](#)



4 Way High Power Broadband Combiner From
2 GHz to 6 GHz Rated at 400 Watts, Type N

TECHNICAL DATA SHEET

PE20S0017

Size

Length	2.96 in [75.18 mm]
Width	4.51 in [114.55 mm]
Height	1.1 in [27.94 mm]

Connectors

Description	Input Connector	Output Connectors
Connector Material and Plating	Brass, Nickel	Brass, Nickel

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 2 GHz to 6 GHz Rated at 400 Watts, Type N PE20S0017](#)




4 Way High Power Broadband Combiner From
2 GHz to 6 GHz Rated at 400 Watts, Type N

TECHNICAL DATA SHEET

PE20S0017

Performance Data

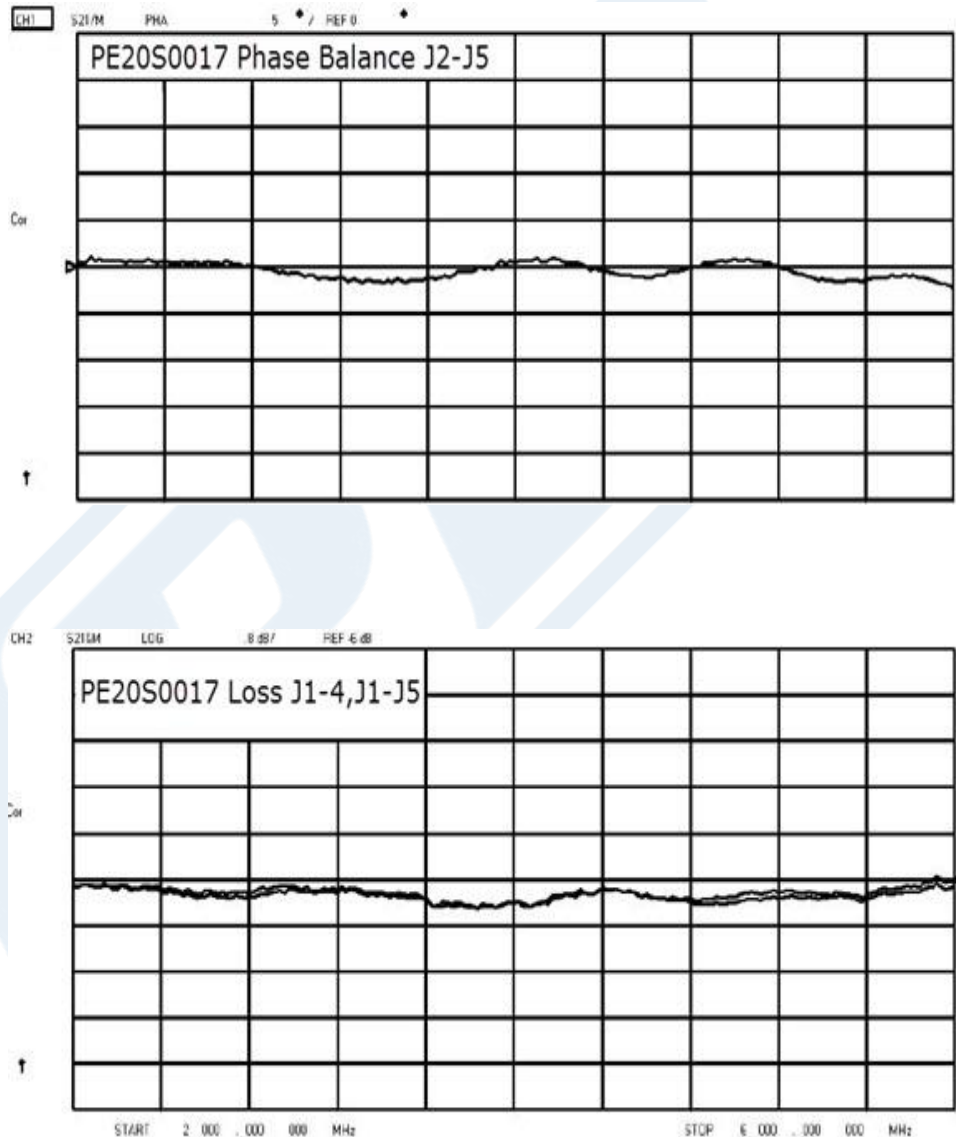


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 2 GHz to 6 GHz Rated at 400 Watts, Type N PE20S0017](#)



4 Way High Power Broadband Combiner From
2 GHz to 6 GHz Rated at 400 Watts, Type N

TECHNICAL DATA SHEET

PE20S0017

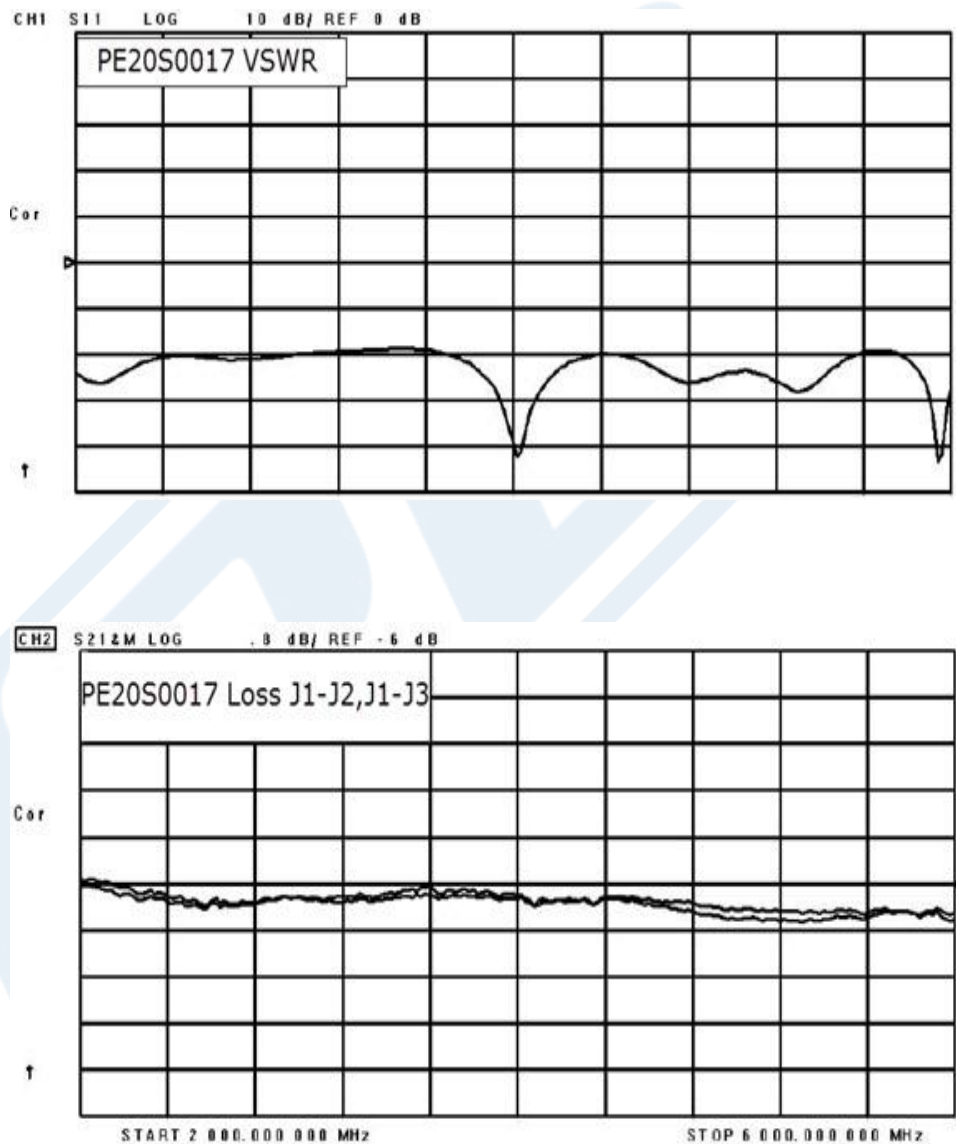


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 2 GHz to 6 GHz Rated at 400 Watts, Type N PE20S0017](#)



4 Way High Power Broadband Combiner From
2 GHz to 6 GHz Rated at 400 Watts, Type N

TECHNICAL DATA SHEET

PE20S0017

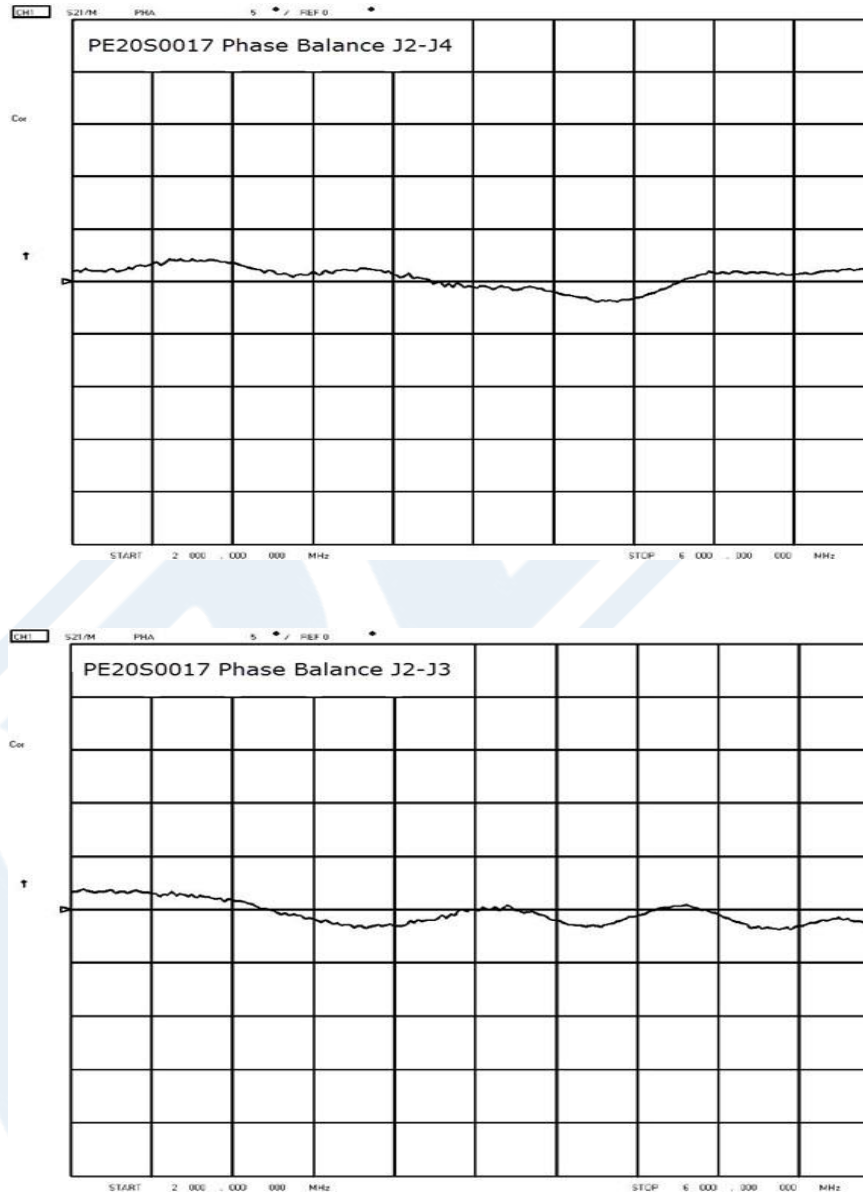

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 2 GHz to 6 GHz Rated at 400 Watts, Type N PE20S0017](#)



4 Way High Power Broadband Combiner From 2 GHz to 6 GHz Rated at 400 Watts, Type N

TECHNICAL DATA SHEET

PE20S0017

4 Way High Power Broadband Combiner From 2 GHz to 6 GHz Rated at 400 Watts, Type N from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 2 GHz to 6 GHz Rated at 400 Watts, Type N PE20S0017](http://www.pasternack.com/4-way-n-broadband-power-combiner-2-6-ghz-400-watts-pe20s0017-p.aspx)

URL: <http://www.pasternack.com/4-way-n-broadband-power-combiner-2-6-ghz-400-watts-pe20s0017-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE20S0017 CAD Drawing

4 Way High Power Broadband Combiner From 2 GHz
to 6 GHz Rated at 400 Watts, Type N

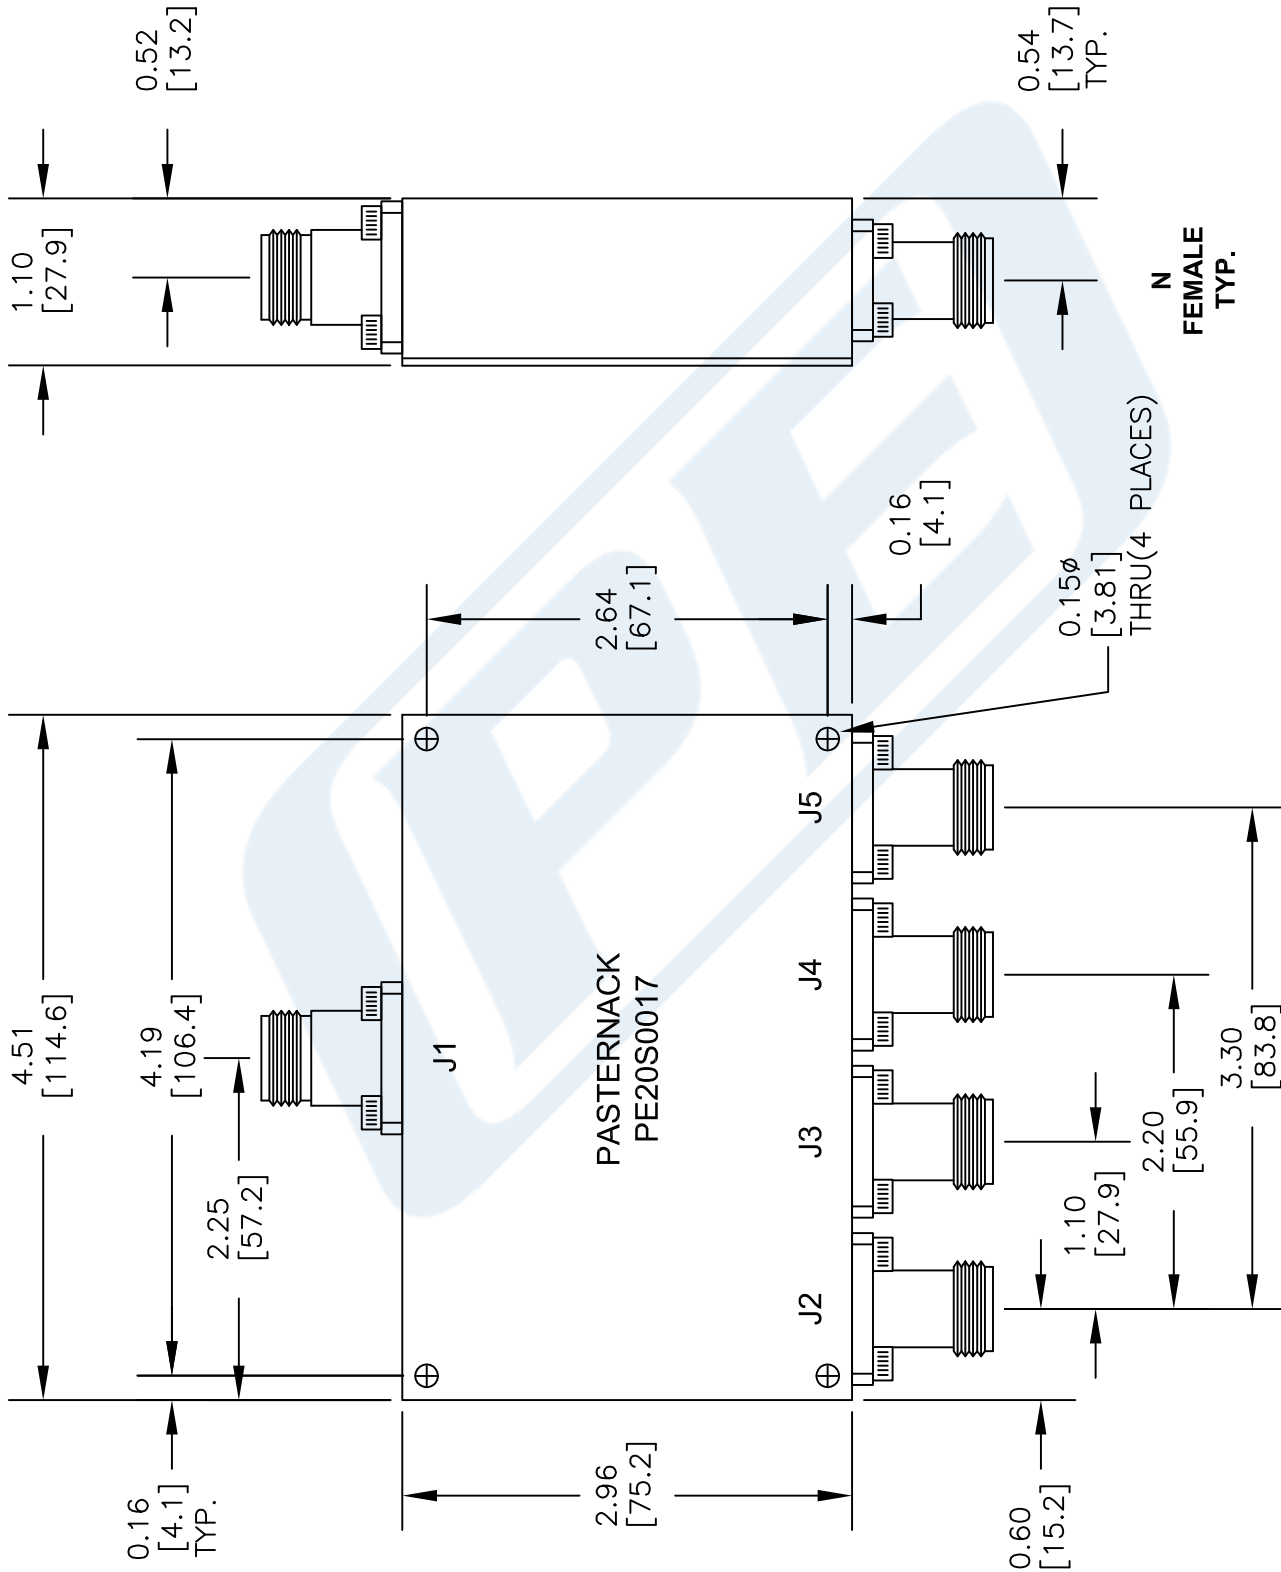

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE20S0017

FSCM NO. 53919

CAD FILE 071614

SCALE N/A

SIZE A

150

PE PASTERNAK
THE ENGINEER'S RF SOURCE

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com