






Standards
NF C 96-315
MIL-DTL-39030

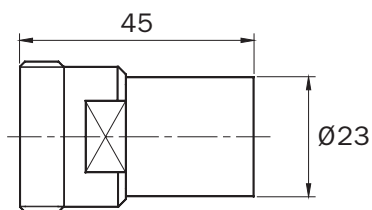

Impedance	$50 \Omega \pm 2\%$
Frequency	DC - 4 GHz
Max VSWR	≤ 1.06 at 2 GHz, ≤ 1.10 at 3 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	6 W
Weight	130 g



Dimensions in mm

P/N	Connector
17-0178	7-16 m
17-0168	7-16 f