

REVISIONS				DATE	APPROVED
2	REV	DESCRIPTION	DATE		
-		ORIGINAL RELEASE	2/7/03		

### Description:

Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

### Specifications:

Frequency Range: 8.0 to 9.0 GHz  
Gain: 30dB Typ.  
Gain Flatness: +/-0.5dB Max.  
Noise Figure: 2.5dB Typ.  
OP1dB: 19dBm Min.  
VSWR Input/Output: 2.0:1 Max.  
DC Voltage Supply: +12 to +15V/DC  
DC Current Draw: 300mA Max.

### Features:

Internal Voltage Regulation  
Unconditional Stability  
Standard Operating Temperature -20 to +70 Deg. C

### Available Options:


Various Package types  
Various Connector types  
Temperature Compensation  
Hermetic Sealing  
Gain and Phase Matching  
MIL-STD-883 Screening Available

### Environmental Ratings:


Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C (Available)  
-55 to +125 Deg. C (Storage)  
Humidity: MIL-STD-202F, METHOD 103B COND B.  
Shock: MIL-STD-202F, METHOD 213B COND B.  
Altitude: MIL-STD-202F, METHOD 105C COND B.  
Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

### PE2 HOUSING WITH CARRIER

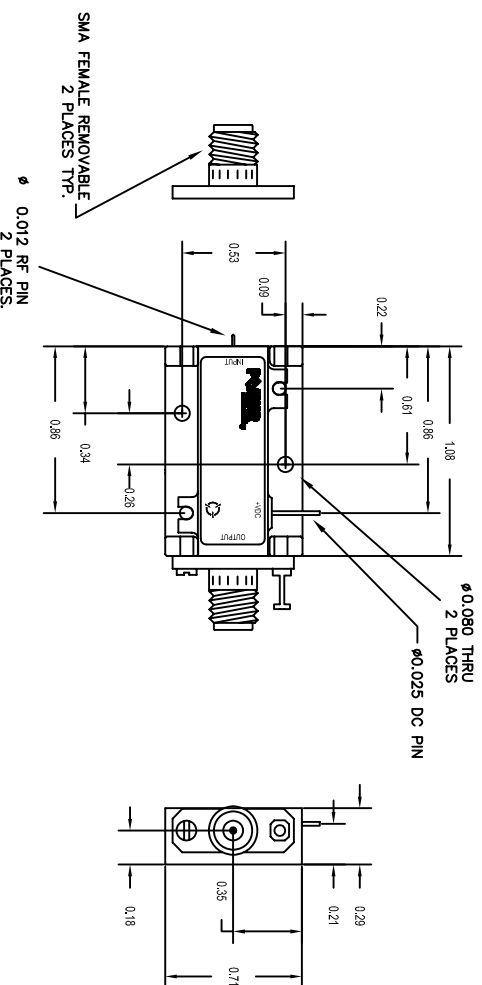

### PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

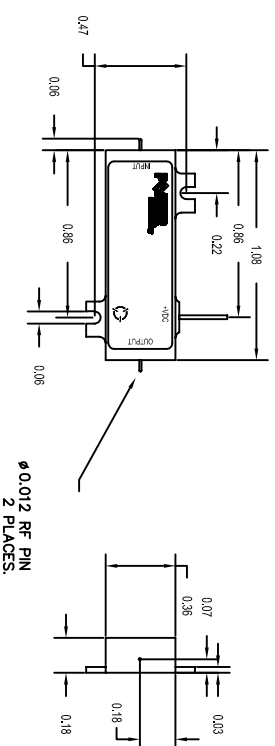

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
FRACTIONS DECIMALS ANGLES  
± ± ±  
.XXX ± 0.005

PART NO.		DATE		TITLE	
MATERIAL:		APPROVALS		DATE	
6061-T6 Aluminum		K. Mason		2/27/03	
FINISH:		TOLERANCES ARE:		FRACTIONS DECIMALS ANGLES	
Gold Plate over Nickel		±		±	
DO NOT SCALE DRAWING		±		±	
B. 1LK53		WEB - MODEL		A	
B. 1LK53		WEB - MODEL		A	
B. 1LK53		WEB - MODEL		A	