

ATTENUATOR SETS

SMA, TYPE N, 2.9mm & 2.4mm

UP TO 50 GHz



MODELS: 9401–9408, 9411–9416, 9473 & 9477

SPECIFICATIONS:

Electrical:

Frequency Range _____ See Table
 Standard dB Values _____ See Table
 OR CREATE YOUR OWN SET FROM dB VALUES OF YOUR CHOICE

Power Handling


Models 9401 - 9412, 9473 & 9477 _____ 2 Watts Avg. @ +25°C
 Models 9413 - 9416 _____ 0.5 Watt Avg. @ +25°C

Calibration Data Included.

Uniform Phase Characteristics & Excellent Unit-to-Unit Linearity
 with Frequency.

Mechanical:

SMA, 2.4mm & Type N Connectors _____ Mates with MIL-STD-348
 2.9mm Connectors _____ Mates both Mechanically & Electrically
 with all SMA, K*, & 3.5mm Series Connectors.

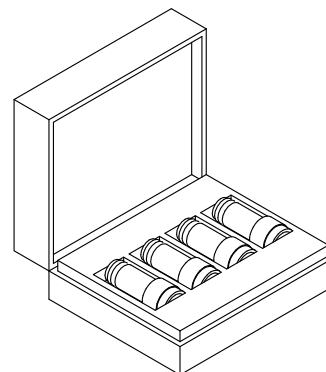

Model 9401 Shown

Refer to the Appropriate Outline Drawing for Further Information
 on Individual Attenuator Specifications.

*K is a trademark of Wiltron Corp.

TABLE

MODEL NUMBER	CONN. TYPE	FREQUENCY RANGE	ATTENUATOR MODEL NO.	STANDARD dB VALUES
9401	Type N	DC - 18 GHz	18N-XXdB	3, 6, 10 & 20 dB
9402	Type N	DC - 12.4 GHz	12N-XXdB	3, 6, 10 & 20 dB
9403	SMA	DC - 18 GHz	18A-XXdB	3, 6, 10 & 20 dB
9404	SMA	DC - 12.4 GHz	12A-XXdB	3, 6, 10 & 20 dB
9405	Type N	DC - 18 GHz	18N-XXdB	1, 3, 6, 10, 20 & 30 dB
9406	Type N	DC - 12.4 GHz	12N-XXdB	1, 3, 6, 10, 20 & 30 dB
9407	SMA	DC - 18 GHz	18A-XXdB	1, 3, 6, 10, 20 & 30 dB
9408	SMA	DC - 12.4 GHz	12A-XXdB	1, 3, 6, 10, 20 & 30 dB
9411	2.9mm	DC - 26.5 GHz	26A-XXdB	3, 6, 10 & 20 dB
9412	2.9mm	DC - 26.5 GHz	26A-XXdB	1, 3, 6, 10, 20 & 30 dB
9413	2.9mm	DC - 40 GHz	40A-XXdB	3, 6, 10 & 20 dB
9414	2.9mm	DC - 40 GHz	40A-XXdB	1, 3, 6, 10, 20 & 30 dB
9415	2.4mm	DC - 40 GHz	40EH-XXdB	3, 6, 10 & 20 dB
9416	2.4mm	DC - 50 GHz	50EH-XXdB	3, 6, 10 & 20 dB
9473	SMA	DC - 23 GHz	23DH-XXdB	1, 3, 6, 10, 20 & 30 dB
9477	SMA	DC - 23 GHz	23AH-XXdB	1, 3, 6, 10, 20 & 30 dB

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com

401-4000 ; REV G