

# MINI SMP-F TERMINATION 40 GHZ

ST4079

## SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-40 GHZ  
IMPEDANCE: 50 OHMS  
VSWR 1.6:1 MAX @ 40GHZ  
VSWR = 1.5 MAX @ 26GHZ  
IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: BeCu  
CENTER CONTACTS: BeCu  
PLATING: Au PER MIL-G-45204  
INSULATOR: PTFE  
OP. TEMP RANGE: -55° to +125°C  
ROHS COMPLIANT

SSMP-F

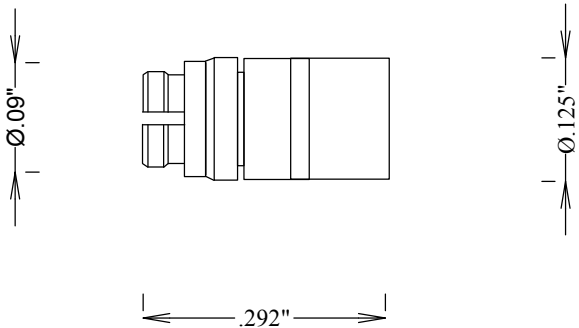

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 [WWW.FAIRVIEWMICROWAVE.COM](http://WWW.FAIRVIEWMICROWAVE.COM)

TITLE

**MINI SMP-F TERMINATION 40 GHZ**

SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	<b>3FKR5</b>	<b>ST4079</b>	<b>--</b>
SCALE	SHEET		