

Coaxial Voltage Variable Attenuator

50Ω 10 to 2500 MHz

ZX73-2500+

Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 85°C
Absolute Max. Supply Voltage (V+)	12V
Absolute Max. Control Voltage (Vctrl)	20V
Absolute Max. RF Input Level	+20 dBm
Permanent damage may occur if any of these limits are exceeded.	

Features

- Broadband, 10-2500 MHz
- IP3, +43 dBm typ.
- 40 dB attenuation @ 1500 MHz
- Good VSWR at in /out ports over attenuation range
- No external bias and RF matching network required
- Shielded case
- Protected by US Patent 6,790,049

Applications

- Variable gain amplifier
- Power level control
- Feed-forward amplifiers
- ALC circuits




FEMALE SMA shown
CASE STYLE: GD958

SMA	Connectors	Model	Price	Qty.	Case
INPUT	OUTPUT				
FEMALE	FEMALE	ZX73-2500-S+	\$49.95	(1-9)	GD958
MALE	FEMALE	ZX73-2500M-S+	\$49.95	(1-9)	GD1163

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing (GD958)

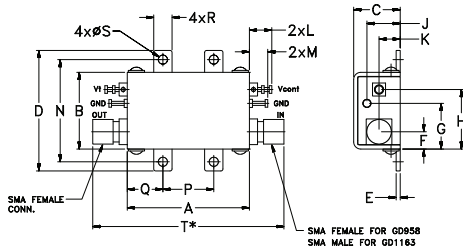

Electrical Specifications (T_{AMB} = 25°C)

FREQ. (MHz)		MIN. INSERTION LOSS, dB (+15V)		MAX. ATTENUATION dB (0V)		INPUT POWER (dBm)		CONTROL Voltage (V) Current (mA)		IP3 (dBm)	RETURN LOSS ¹ (dB)	POWER SUPPLY Voltage (V) Current (mA)	
Min.	Max.	Typ.	Max.	Typ.	Min.	Max.		Max.		Typ.	Typ.		Max.
10	500	3.0	4.6	55	41	+20		0 - 17	30	43	20	+3 to +5	5
500	1500	3.3	5.0	40	30	+20		0 - 17	30	43	20	+3 to +5	5
1500	2500	4.0	6.2	37	25	+20		0 - 17	30	44	20	+3 to +5	5

Notes:

Rise/Fall time: 14μSec/25μSec Typ.

Switching Time, turn on/off: 14μSec/25μSec Typ.

¹ Improved R. Loss in/out performance can be achieved at certain frequencies by choosing a V+ between +3V to +5V


Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	
1.20	.75	.46	1.18	.04	.17	.45	.59	.33	
30.48	19.05	11.68	29.97	1.02	4.32	11.43	14.99	8.38	
K	L	M	N	P	Q	R	S	T	wt.
.21	.22	.18	1.00	.50	.35	.18	.106	1.88	grams
5.33	5.59	4.57	25.40	12.70	8.89	4.57	2.69	47.75	35.0

Note:


* T dimension is 2.05 inch (52.07 mm) for GD1163 Case Style.

Equivalent Schematic

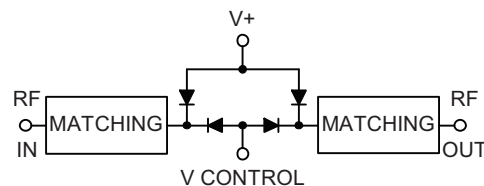

ZX73-2500+

TYPICAL ATTENUATION AT 1000MHz

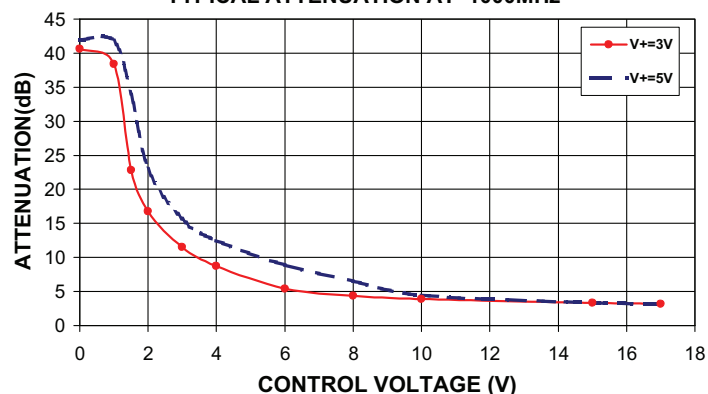

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.


For detailed performance specs
& shopping online see web site

REV. C
M108294
EDR-7796
ZX73-2500+
RAV/TD/CP
121024
Page 1 of 3


ZX73-2500+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

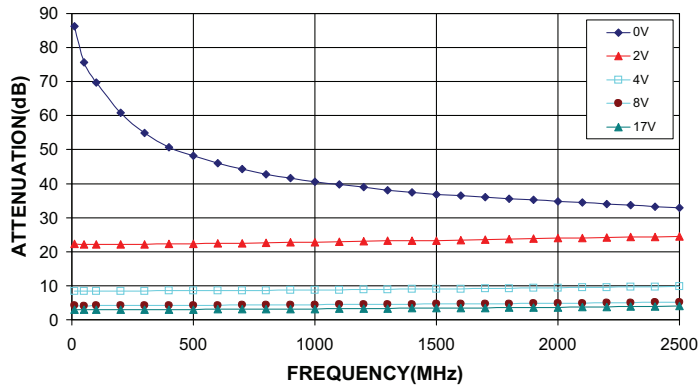


ZX73-2500+
ATTENUATION Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

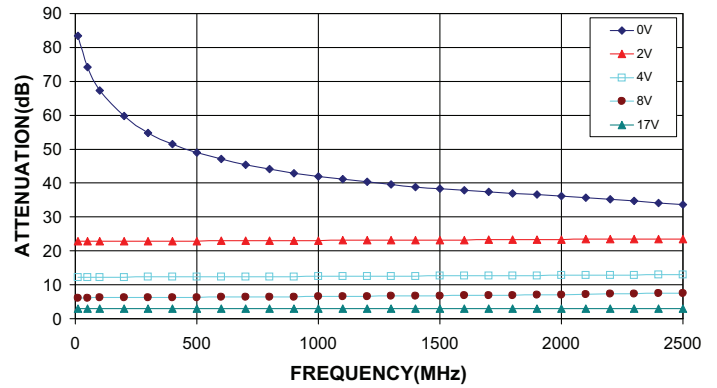


ZX73-2500+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 1000MHz @ V+=3V

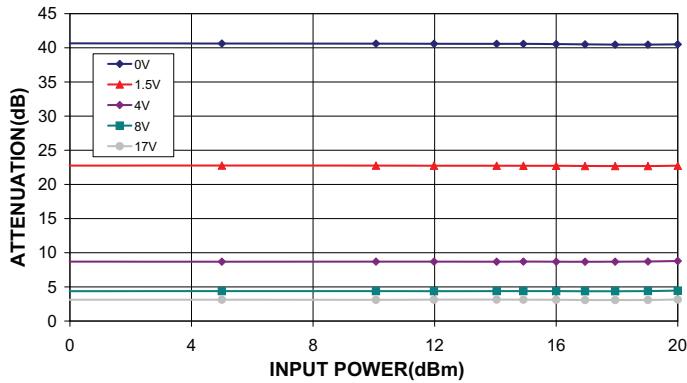


ZX73-2500+
ATTENUATION Vs. INPUT POWER
OVER CONTROL VOLTAGES AT 1000MHz @ V+=5V

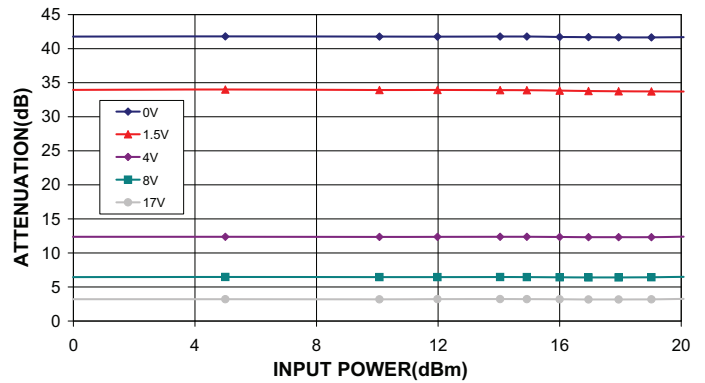


ZX73-2500+
INPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

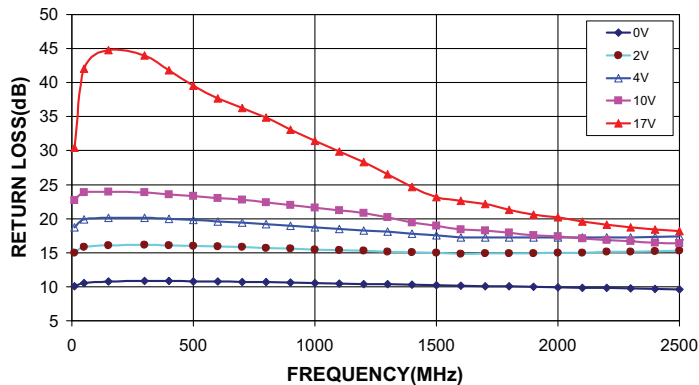


ZX73-2500+
INPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

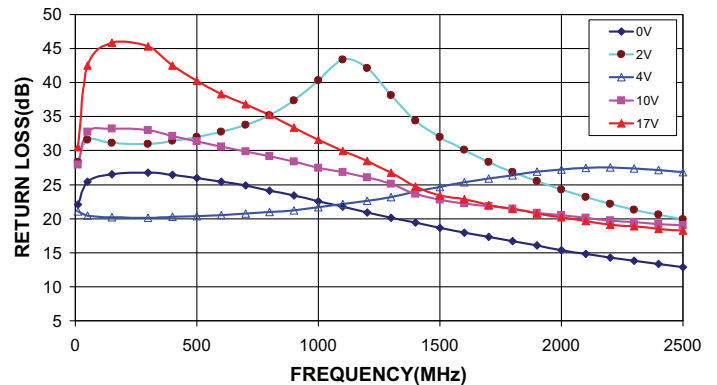


ZX73-2500+
OUTPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

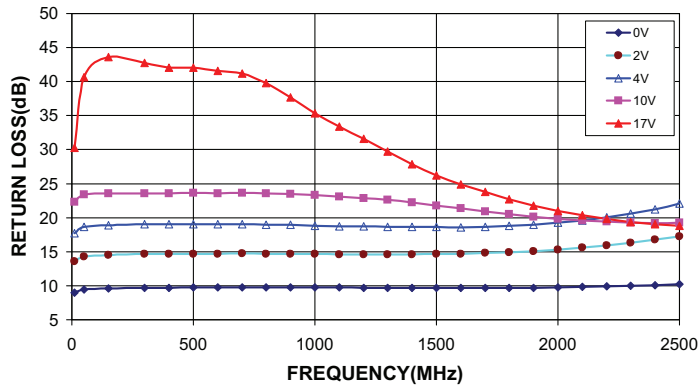


ZX73-2500+
OUTPUT RETURN LOSS Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

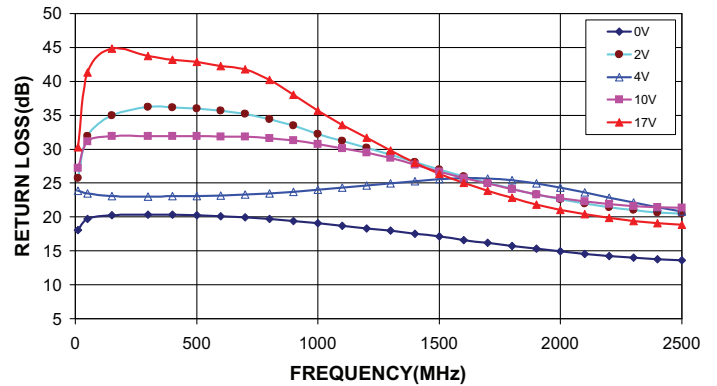


ZX73-2500+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

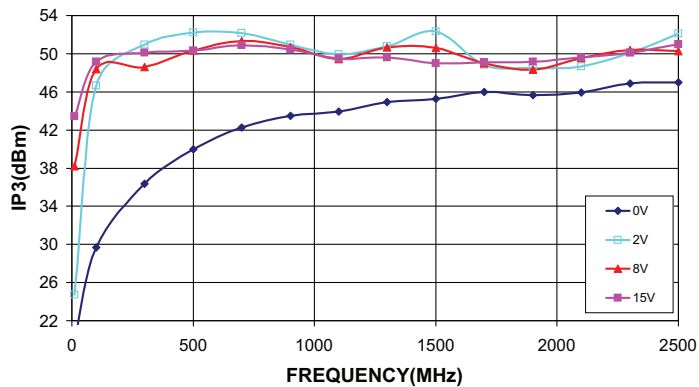

ZX73-2500+
IP3 Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

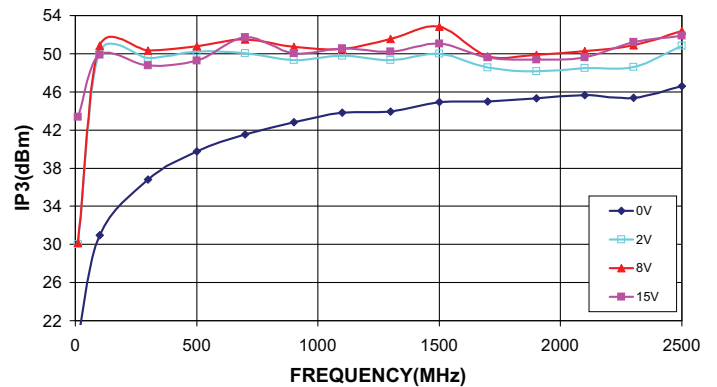

ZX73-2500+
PHASE SHIFT Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=3V

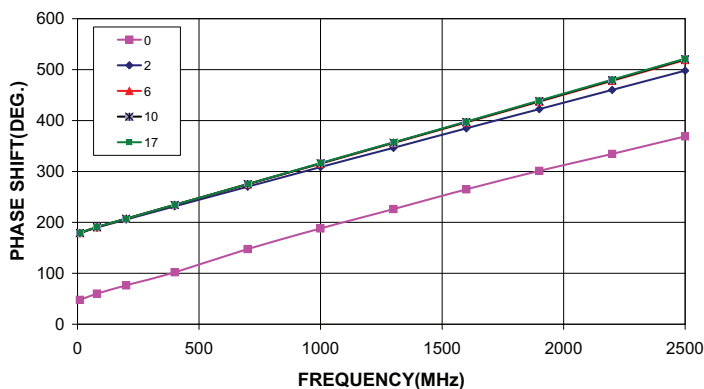

ZX73-2500+
PHASE SHIFT Vs. FREQUENCY
OVER CONTROL VOLTAGES @ V+=5V

