



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5803108-036

**800 - 2000 MHz
120 WATTS
LINEAR POWER RF AMPLIFIER**

Solid State Broadband High Power RF Amplifier

The 5803108-036 is a 120 Watt broadband amplifier that covers the 800 – 2000 MHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

The 5803108-036 comes with Heatsink and Fan. (Fans operate on 12VDC).

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability.

Specifications subject to change without notice

	Parameter	Specification @ 25° C
<u>Electrical</u>		
1	Frequency Range	800 – 2000 MHz
2	Output power @ Psat	120 Watts typical*
3	Output power @ P1dB	80 Watts min*
4	Small Signal Gain	+54 dB min
5	Small Signal Gain Flatness	+/-2.0 dB max
6	Input /Output VSWR	2:1 max
7	Harmonics	-20 dBc max
8	Spurious Signals	-60 dBc max
9	Input/Output Impedance	50 Ohms nominal
10	DC Input Power	18A max
11	DC Input	32 - 42 VDC
12	RF Input Power	0 dBm nominal
13	RF Input Signal Format	CW/AM/FM/PM/Pulse
14	Class of Operation	A/AB
15	Interface	D-sub
16	Module Enable	TTL : 5V for enable
17	Temperature Indication	LM35 0.1V/10°C
<u>Mechanical</u>		
19	Dimensions	17" x 6.5" x 5"
20	Weight	25 lb. max
21	Connectors	SMA for RF input Type-N for RF Output D-sub for control & indications Ground lag for Ground
22	Grounding	Chassis
23	Cooling	Adequate Heatsink Required
<u>Environmental</u>		
24	Ambient Temperature	0° C to +40° C
25	Operating Humidity	95% Non-condensing
26	Operating Altitude	Up to 10,000' Above Sea Level
27	Shock and Vibration	Normal Truck Transport


* = Rated power at 42VDC operation



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5803108-036

800 - 2000 MHz
120 WATTS
LINEAR POWER RF AMPLIFIER

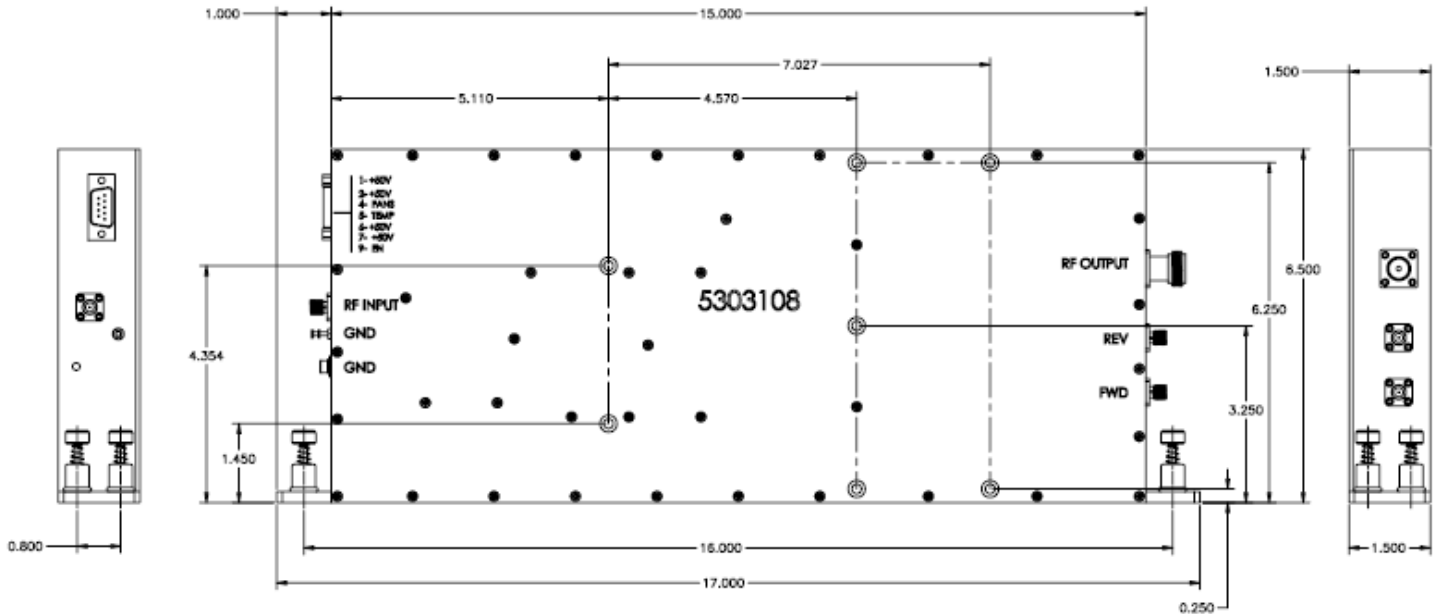

Pin	Description
1	+32 - 42 VDC
2	+32 - 42 VDC
3	NC
4	Fans (Run off 12VDC)
5	Temp Indication
6	+32 - 42 VDC
7	+32 - 42 VDC
8	NC
9	Enable

