



# Zero Biased E Band Waveguide Detector, WR-12, Negative Video Out, 60 GHz to 90 GHz, UG-387/U

## TECHNICAL DATA SHEET

PE80T3001

The PE80T3001 is an E Band Waveguide Detector. The Detector operates in the 60 GHz to 90 GHz Frequency Range and has a Negative Output with a Sensitivity of -600 mv/mW Minimum and -900 mV/mW Typical. The unit operates over a 0°C to +50°C Temperature Range and has a Maximum Input Power Rating of +20 dBm. The Detector has a WR-12 Waveguide with UG 387/U Flange as the RF connector and the DC Output Port uses an SMA Female Connector.

#### **Features**

- Frequency: 60 GHz to 90 GHz
- Sensitivity: -600 mV/mW Minimum; -900 mV/mW
  - Typical
- · Output: Negative

- · Maximum Power Input 20 dBm
- RF Connector WR-12 Waveguide with UG 387/U Flange
- DC Output: SMA Female Connector

#### **Applications**

Test Lab

- Military Communications
- Commercial Communications

#### **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	60		90	GHz
Voltage Sensitivity	-600	-900		mV/mW
Input Power			+20	dBm

#### **Mechanical Specifications**

**Temperature** 

Operating Range 0 to +50 deg C

Size

 Length
 1.24 in [31.5 mm]

 Width
 1 in [25.4 mm]

 Height
 0.75 in [19.05 mm]

 Weight
 0.0625 lbs [28.35 q]

RF Connector WR-12 Waveguide with UG-387/U Flange

DC Connector SMA Female

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

#### **Plotted and Other Data**

Notes:

• Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Zero Biased E Band Waveguide Detector, WR-12, Negative Video Out, 60 GHz to 90 GHz, UG-387/U PE80T3001

ISO 9001 : 2008 Registered






Zero Biased E Band Waveguide Detector, WR-12, Negative Video Out, 60 GHz to 90 GHz, UG-387/U

## TECHNICAL DATA SHEET

#### PE80T3001

#### **Typical Performance Data**

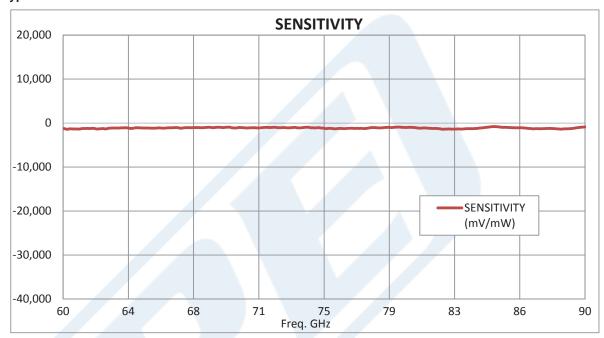

Zero Biased E Band Waveguide Detector, WR-12, Negative Video Out, 60 GHz to 90 GHz, UG-387/U from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Zero Biased E Band Waveguide Detector, WR-12, Negative Video Out, 60 GHz to 90 GHz, UG-387/U PE80T3001

URL: http://www.pasternack.com/zero-biased-e-band-waveguide-detector-wr-12-negative-60-90-ghz-pe80t3001-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



# PE80T3001 CAD Drawing

Zero Biased E Band Waveguide Detector, WR-12, Negative Video Out, 60 GHz to 90 GHz, UG-387/U

