



WR-15 With UG-385/U Flange to 1.85mm Male Waveguide to Coax Adapter Operating From 50 GHz to 65 GHz V Band

Waveguide to Coax Adapters Technical Data Sheet

PE-W15CA002

Features

- V Band, 50 to 65 GHz Frequency Range
- WR-15 Waveguide Interface with Precision Tolerance UG-385/U Flange
- 1.85 mm Male RF Interface
- Comprehensive waveguide offerings also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

Description

PE-W15CA002 is a waveguide to coaxial adapter operating in the V Band with a 50 GHz to 65 GHz frequency range. This adapter offers a WR-15 waveguide interface size coupled with a precision tolerance UG-385/U flange. PE-W15CA002 is constructed of aluminum and plated in gold to ensure durability and repeatable RF performance. The connector offered by this adapter uses a 1.85 mm geometry endorsed by the International Electrotechnical Commission (IEC). The 1.85 mm mates with commercially available 2.4 mm connectors.

Configuration

Waveguide Size	WR-15
Flange	UG-385/U
RF Connector	1.85mm Male
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	50		65	GHz
VSWR			1.44:1	
Insertion Loss			0.5	dB

Mechanical Specifications

Size	
Length	1.05 in [26.67 mm]
Width	0.75 in [19.05 mm]
Height	1.065 in [27.05 mm]
RF Connector	
Connector Type	1.85mm Male
Body Material and Plating	Stainless Steel
Waveguide Interface	
Waveguide Type	WR-15
Flange Type	UG-385/U

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-15 With UG-385/U Flange to 1.85mm Male Waveguide to Coax Adapter Operating From 50 GHz to 65 GHz V Band PE-W15CA002](#)



WR-15 With UG-385/U Flange to 1.85mm Male Waveguide to Coax Adapter Operating From 50 GHz to 65 GHz V Band

Waveguide to Coax Adapters Technical Data Sheet

PE-W15CA002

Body Material and Plating
Plating Specification

Aluminum, Gold
ASTMB488

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant
REACH Compliant


06/14/2014

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

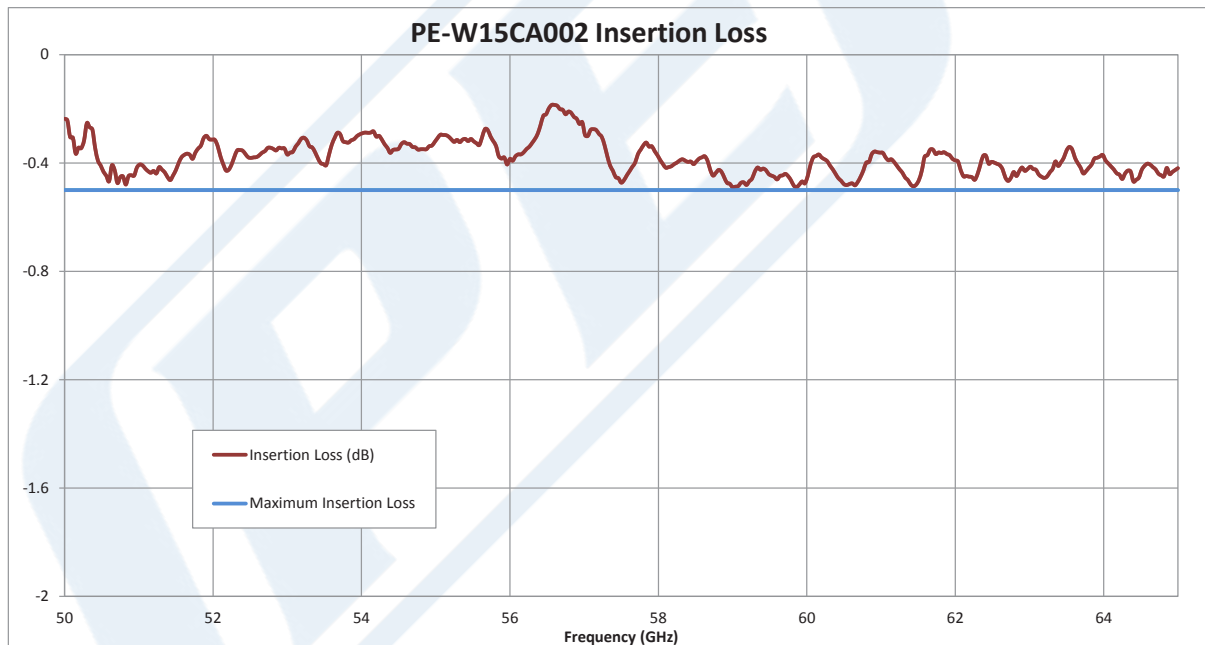


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-15 With UG-385/U Flange to 1.85mm Male Waveguide to Coax Adapter Operating From 50 GHz to 65 GHz V Band PE-W15CA002](#)



WR-15 With UG-385/U Flange to 1.85mm Male Waveguide to Coax Adapter Operating From 50 GHz to 65 GHz V Band

Waveguide to Coax Adapters Technical Data Sheet

PE-W15CA002

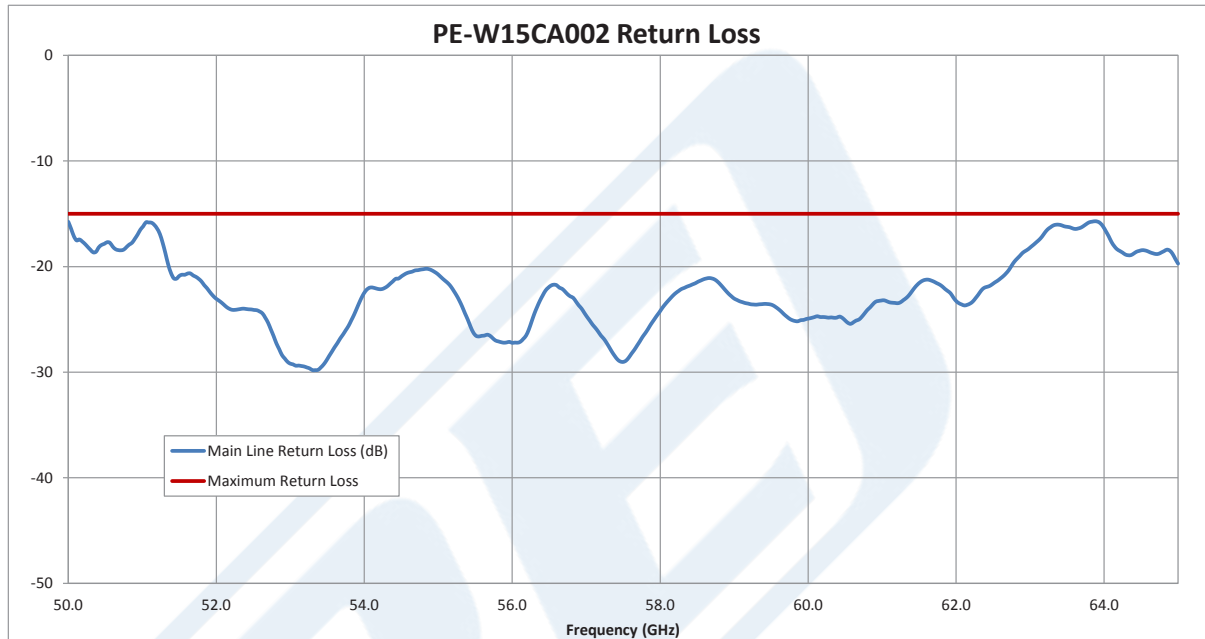

WR-15 With UG-385/U Flange to 1.85mm Male Waveguide to Coax Adapter Operating From 50 GHz to 65 GHz V Band from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-15 With UG-385/U Flange to 1.85mm Male Waveguide to Coax Adapter Operating From 50 GHz to 65 GHz V Band PE-W15CA002](http://www.pasternack.com/wr-15-ug-385-1.85mm-waveguide-coax-adapter-65-ghz-pe-w15ca002-p.aspx)

URL: <http://www.pasternack.com/wr-15-ug-385-1.85mm-waveguide-coax-adapter-65-ghz-pe-w15ca002-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE-W15CA002 CAD Drawing

WR-15 With UG-385/U Flange to 1.85mm Male Waveguide to Coax
Adapter Operating From 50 GHz to 65 GHz V Band

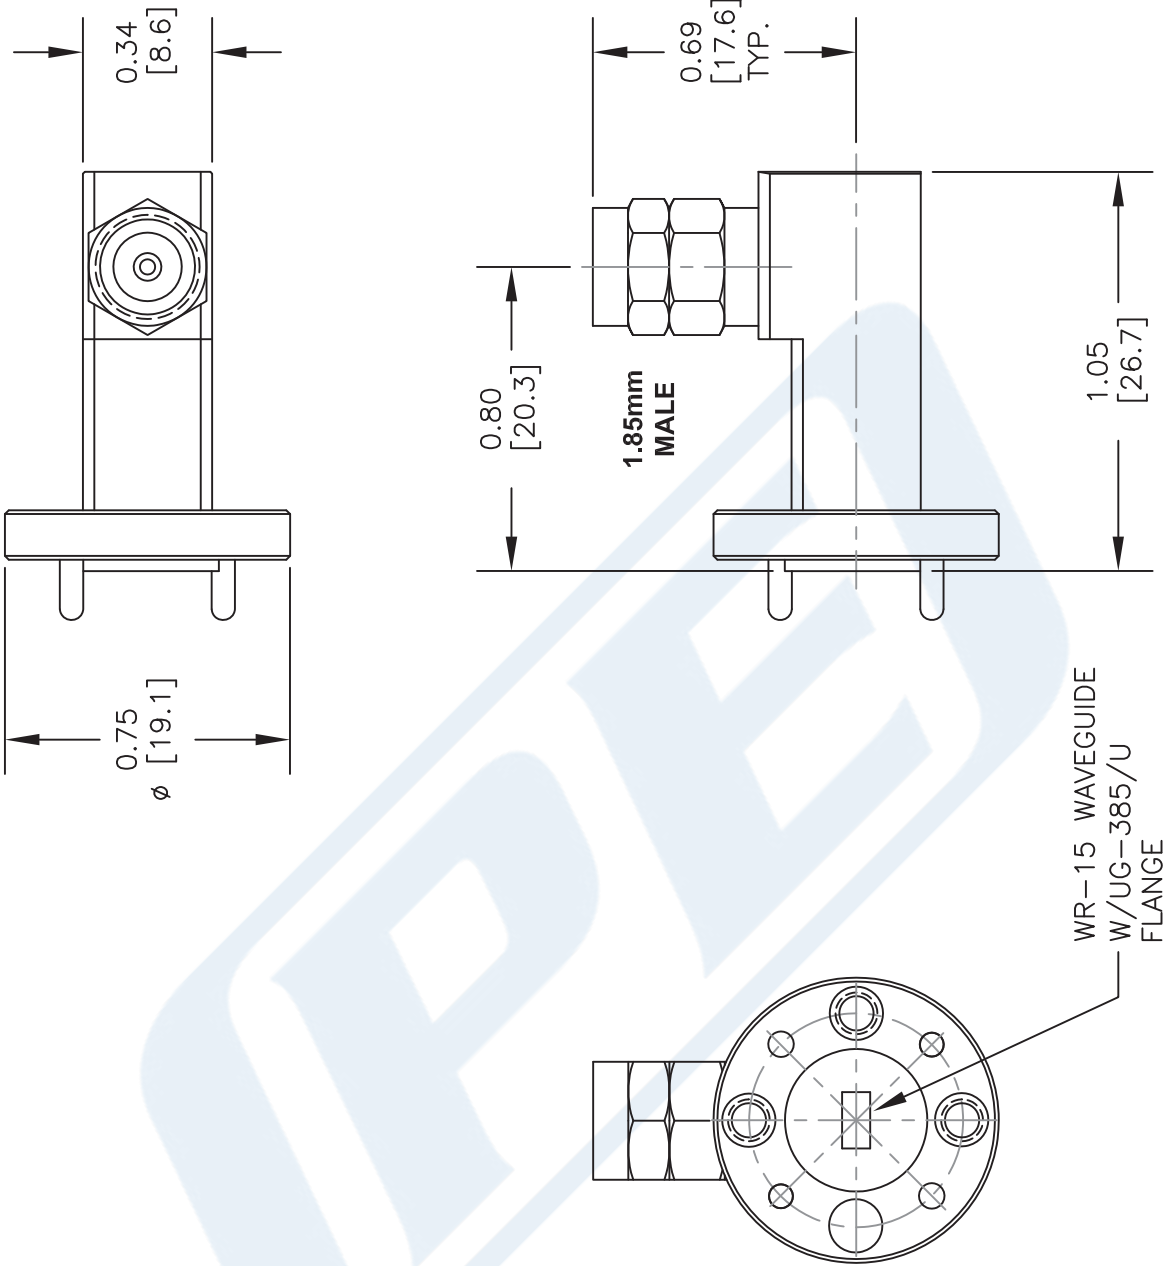

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		
DECIMALS	ANGLES	FRACTIONS
.XX ±.01	± 1/2°	± 1/64
.XXX ±.005		
HOLE DIAMETER	TOLERANCE	
.0135 TO .125	+.004/- .001	
.126 TO .250	+.005/- .001	
.251 TO .500	+.006/- .001	
.501 TO .750	+.008/- .001	
.751 TO 1.000	+.010/- .001	
1.001 TO 2.000	+.012/- .001	

* THESE DIMENSIONS AND TOLERANCES
SUPERSEDE NOTE #1 ON TITLE BLOCK.

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE-W15CA002

FSCM NO. 53919

SIZE A

SCALE N/A

CAD FILE 031215

2233

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com