


RadiPower® Wireless

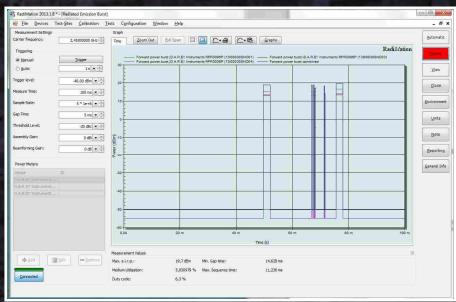

Dijkstra Advice, Research & EMC Instruments B.V.
Vijzelmolenlaan 7 - NL-3447 GX Woerden
The Netherlands
Tel: +31 348 41 65 92
Fax: +31 348 43 06 45
Internet: www.dare.eu
E-mail: instruments@dare.eu

The Standard in EMC Instruments & Software,
Consultancy and Training.

DARE!!
Instruments

Power Meter for Wireless measurements

Fast Synchronous Power Measurements • Robust • Flexible

DARE!! Instruments has extended its range of RadiPower® RF power meters to comply with the measurement requirements of the ETSI 300 328 and 301 893 standards for wideband data transmission systems, like IEEE 802.11™, Bluetooth® and Zigbee™. The RPR3006W provides measurements over a frequency range from 10 MHz up to 6 GHz.

Extremely Fast

In order to achieve this measurement requirements of the standard the sampling speed of the RadiPower® power head has been increased to maximum 5 MS/s. At the same time a hardware trigger input/output has been added to to allow synchronous power measurements of wideband data transmission devices with multiple inputs/outputs (MIMO).

Accurate

Next to speed, accuracy is another main requirement when performing RF power measurements of wireless devices. The RPR3006W allows high precision RF power measurements with a high dynamic range of 60 dB. The power meter provides a basic accuracy of $\pm 0,2$ dB and is way within the requirements for measurements in accordance to ETSI standards.

Easy to use

The RadiPower® Wireless is equipped with an USB interface which enables direct connection of the Power heads to a PC USB port. Together with the RadiPower® USB power head a RadiMation® FREE freeware package is delivered to enable direct control of the power meter settings and display the measurement results on the PC screen. The RadiMation® Freeware also enables synchronous triggering of multiple RadiPower® Wireless power heads.

‘Burst’ mode

The RadiMation® Freeware includes a ‘Burst’ mode with user selectable measurement speed/time to capture the ETSI Burst/Pulse signals and calculate the measurement parameters, maximum RMS power, duty cycle, medium utilization and maximum sequence time. This mode is fully compliant with the measurement methods as defined in the ETSI standards for wideband data transmission systems EN 300 328 (2,4 GHz) and EN 301 893 (5 GHz).

In burst mode, the RadiPower® can store the information of 100.000 bursts and observation time up to 60 seconds. For each burst the average power and timing data is stored in the buffer. The RadiPower® uses a sample speed of 1 or 5 MSps in combination with a RMS detector to ensure correct measurements on wideband modulating transceivers.

For MIMO devices multiple RPR3006W units can be daisy-chained using the MMCX connectors enabling synchronised triggering of the RadiPower® meters. RadiMation® Freeware captures the samples simultaneously and calculates the total power according to the EN 300 328 standard.

Software support

The standard delivered RadiMation® Freeware supports all RadiPower® measurement modes. Using the instrument command codes the RadiPower® Wireless can be used with any other software control package.

Technical Specifications

RadiPower®	
RadiPower® Head	RPR3006W
Detector type	: RMS log detector
Measurement function	: RMS CW power, peak (max hold) and Burst mode
Calibrated frequency range	: 10 MHz to 6 GHz
Power measuring range	: -50 dBm to +10 dBm
Maximum SWR	: 1,10 @ up to 1 GHz 1,15 @ 1 GHz to 6 GHz
Frequency response accuracy (at 23°C ± 2°C)	: ± 0,2 dB
Deviation from CW for wideband modulated signals with high crest factor	: < 0,2 dB
Linearity error	: 0,05 dB + 0,005 dB/dB
Input damage level	: > +20 dBm
Resolution	: 0,01 dB
RF input impedance	: 50 Ohm
Measuring speed	: Max. 5 MS/s
Temperature effect	: 0,15 dB over full temperature range
Zero adjustment	: Not required
Frequency response correction	: Stored frequency response data is taken into account by numerical entry of the measurement frequency
Measurement units	: dBm / Watts

Mechanical	
Dimensions of measuring device	: 124 mm (L) * 32 mm (W) * 32 mm (H)
RF input connector	: Precision N-type
Data connector (power head side)	: USB mini type B
Trigger input and output	: MMCX (standard one cable supplied with each RPR3006W)

Environmental	
Temperature range (use)	: 0° C - +40° C
Temperature range (storage)	: -20° C - + 85° C
Relative humidity (non-condensing)	: 10 - 90%

Interfaces and supply	
USB Communication	: USB2, drivers supplied for latest Windows® versions
Supply voltage	: + 5 VDC from USB port (4,75 VDC to 5,25 VDC)
Current consumption (USB)	: Typical 180 mA (maximum 200 mA)
Warranty	: 3 years

Models

RPR3006W : RadiPower® RF Wireless power head, 6 GHz

More information

For more information contact:
DARE!! Instruments at:
+31 348 41 65 92 or instruments@dare.eu
Internet: www.dare.eu

Distributed by:



DARE!!
Instruments

Dijkstra Advice, Research & EMC Instruments B.V.
Vijzelmolenlaan 7 – NL-3447 GX Woerden - The Netherlands
Tel: +31 348 41 65 92, Fax: +31 348 43 06 45
Internet: www.dare.eu
E-mail: instruments@dare.eu