



5300 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5803108

**1000 - 2000 MHz
200 WATTS
LINEAR POWER RF AMPLIFIER**

Solid State Broadband High Power RF Amplifier

The 5803108 is a 200 Watt broadband amplifier that covers the 1000 – 2000 MHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

The 5803108 includes a built in Dual directional coupler which provides forward and reflected RF sample.

The 5803108 comes with Heatsink and Fan. (Fans operate on 12VDC).

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability.


	Parameter	Specification @ 25° C
<u>Electrical</u>		
1	Frequency Range	1000 – 2000 MHz
2	Output power @ Psat	200 Watts typical
3	Output power @ P1dB	100 Watts min
4	Small Signal Gain	+55 dB min
5	Small Signal Gain Flatness	+/-1.5 dB max
6	Input /Output VSWR	2:1 max
7	Harmonics	-20 dBc max
8	Spurious Signals	-60 dBc max
9	Input/Output Impedance	50 Ohms nominal
10	DC Input Power	15A max @ 50V
11	DC Input	42 - 50 VDC
12	RF Input Power	0 dBm nominal
13	RF Input Signal Format	CW/AM/FM/PM/Pulse
14	Class of Operation	A/AB
15	Interface	D-sub
17	Module Enable	TTL : 5V for enable
18	Temperature Indication	LM35 1V/10°C
<u>Mechanical</u>		
19	Dimensions	17" x 6.5" x 5"
20	Weight	25 lb. max
21	Connectors	SMA for RF input Type-N for RF Output D-sub for control & indications Ground lag for Ground
22	Grounding	Chassis
23	Cooling	Adequate Heatsink Required
<u>Environmental</u>		
24	Ambient Temperature	0° C to +40° C
25	Operating Humidity	95% Non-condensing
26	Operating Altitude	Up to 10,000' Above Sea Level
27	Shock and Vibration	Normal Truck Transport



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5803108

1000 - 2000 MHz
200 WATTS
LINEAR POWER RF AMPLIFIER

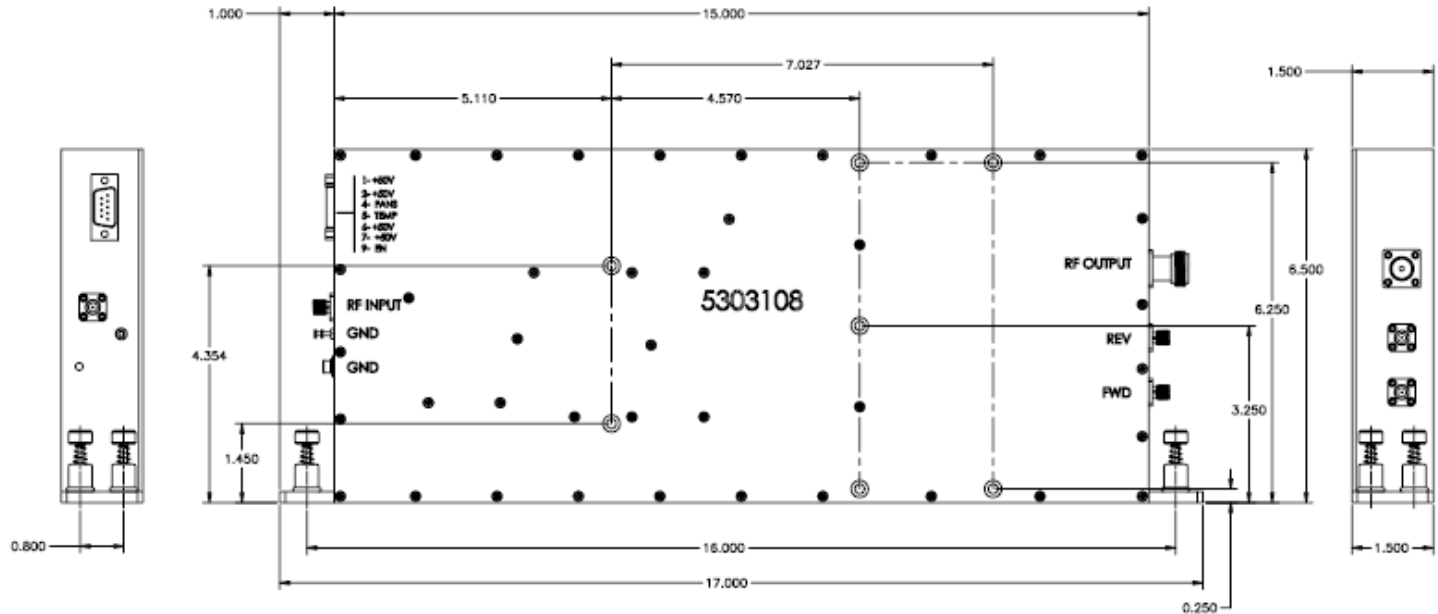

**Drawing is a representation of Module

Pin	Description
1	+42-50 V
2	+42-50 V
3	NC
4	NC
5	Temp Indication
6	+42-50 V
7	+42-50 V
8	NC
9	Enable

