


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

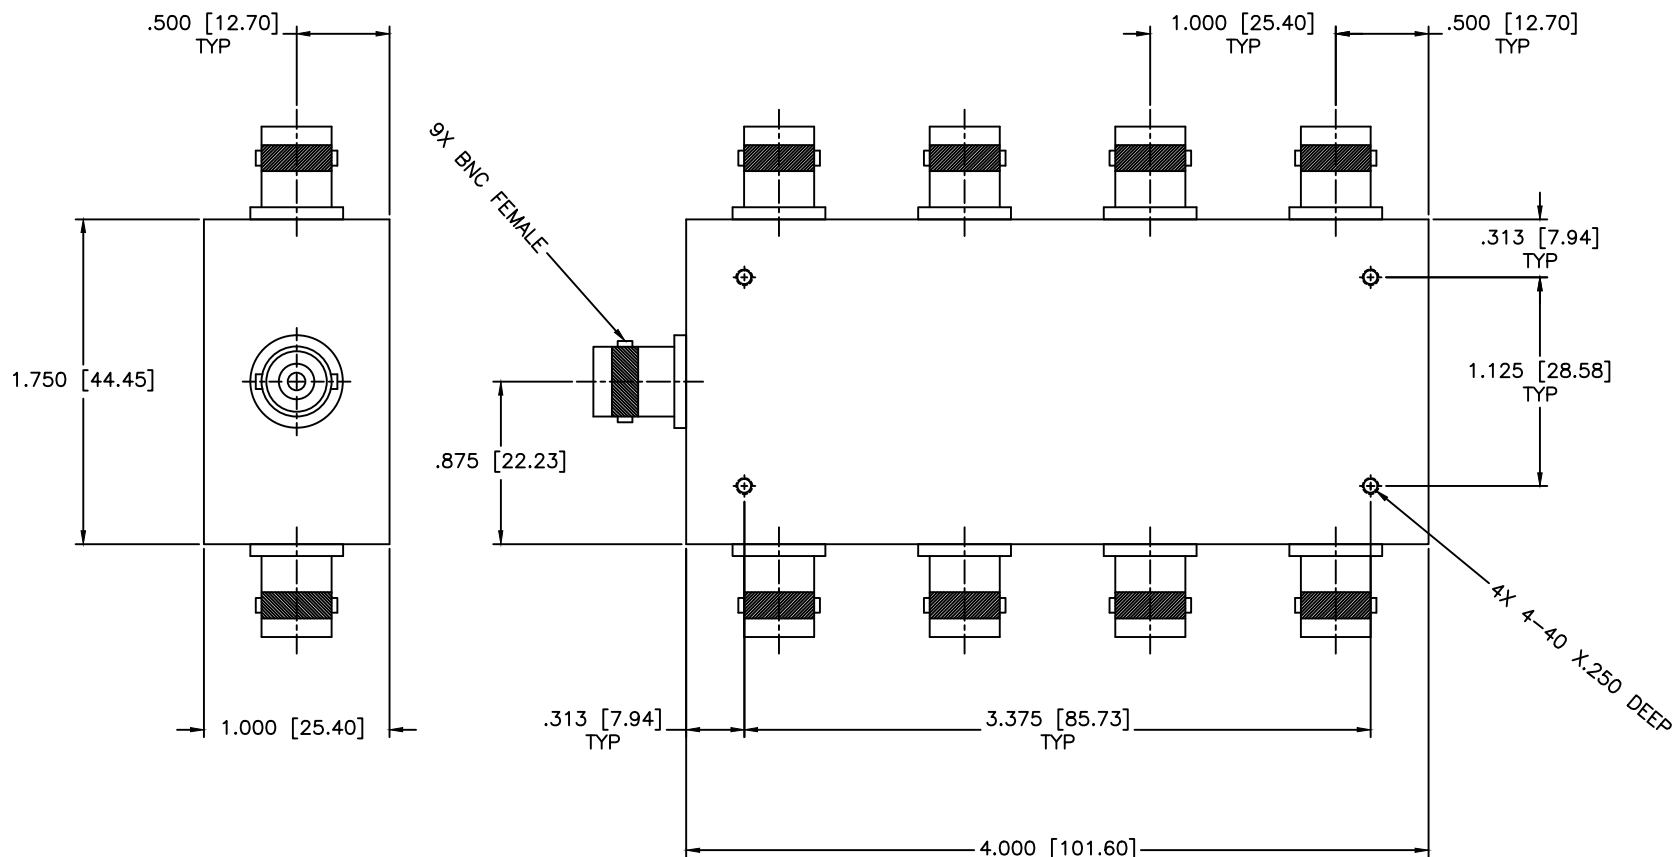

SPECIFICATIONS

Frequency Range: 0.1–30 MHz
Isolation: 25dB Min.
VSWR: 1.30:1 Max.
Insertion Loss: 1.0dB Max.
Amplitude Balance: ± 0.2 dB Max.
Phase Balance: ± 3 Deg. Max.
Power: 1 Watt Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
DRAWN: Paiboon Luekhamhan DATE: 05-06-2008		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	
				8-WAY POWER DIVIDER	
APPROVED: T. Nguyen DATE: 05-06-2008		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.	
				PL8-6/B	
		THIRD ANGLE PROJECTION		CAGE CODE:	OD2L5
				SIZE:	A
				REV:	N/A
				DWG NO.	83844
				DO NOT SCALE THE DRAWING	