

Keysight N9038A

MXE EMI Receiver

20 Hz to 3.6, 8.4, 26.5, and 44 GHz

Data Sheet



Table of Contents

Definitions and Conditions	3
Frequency and Time Specifications.....	4
Amplitude Accuracy and Range Specifications	7
Dynamic Range Specifications.....	11
PowerSuite Measurement Specifications.....	16
General Specifications.....	17
Inputs and Outputs.....	19
I/Q Analyzer.....	21

Keep the test queue flowing

In EMC testing, success depends on tools that can help you do more in less time—today and tomorrow. That’s why Keysight Technologies, Inc. created the MXE: it’s a standards-compliant EMI receiver and diagnostic signal analyzer built on an upgradeable platform. In the lab and on the bench, it provides the accuracy, repeatability, and reliability you need to test with confidence. Equip your team with the MXE, and keep the test queue flowing.

Definitions and Conditions

Specifications describe the performance of parameters covered by the product warranty and apply to the full temperature range of 0 to 55 °C, unless otherwise noted.

95th percentile values indicate the breadth of the population (approx. 2σ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The receiver will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy
- Signal frequencies < 10 MHz, with DC coupling applied
- The receiver has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on
- The receiver has been turned on at least 30 minutes with Auto Align set to normal, or, if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message; if the Alert condition is changed from “Time and Temperature” to one of the disabled duration choices, the receiver may fail to meet specifications without informing the user

This data sheet is a summary of the specifications and conditions for the MXE EMI receiver. For the complete specifications guide, visit:
www.keysight.com/find/mxe_specifications

Get more information

This data sheet is a summary of the specifications and conditions which are available in the MXE EMI Receiver Specification Guide (N9038-90010).

For ordering information, refer to the MXE EMI Receiver Configuration Guide (5990-7419EN).

Frequency and Time Specifications

Frequency range		DC coupled	AC coupled
Input 1			
Option 503		20 Hz to 3.6 GHz	10 MHz to 3.6 GHz
Option 508		20 Hz to 8.4 GHz	10 MHz to 8.4 GHz
Option 526		20 Hz to 26.5 GHz	10 MHz to 26.5 GHz
Option 544		20 Hz to 44 GHz	–
Input 2		20 Hz to 1 GHz	10 MHz to 1 GHz
Band	LO multiple (N)		
0	1	20 Hz to 3.6 GHz	
1	1	3.5 to 8.4 GHz	
2	2	8.3 to 13.6 GHz	
3	2	13.5 to 17.1 GHz	
4	4	17.0 to 26.5 GHz	
5	4	26.4 to 34.5 GHz	
6	8	34.4 to 44 GHz	
Frequency reference			
Accuracy	± [(time since last adjustment x aging rate) + temperature stability + calibration accuracy]		
Total aging	± 1 x 10 ⁻⁷ / year		
	± 1.5 x 10 ⁻⁷ / 2 years		
Temperature stability			
20 to 30 °C	± 1.5 x 10 ⁻⁸		
Full temperature range	± 5 x 10 ⁻⁸		
Achievable initial calibration accuracy	± 4 x 10 ⁻⁸		
Example frequency reference accuracy 1 year after last adjustment	= ± (1 x 1 x 10 ⁻⁷ + 5 x 10 ⁻⁸ + 4 x 10 ⁻⁸)		
	= ± 1.9 x 10 ⁻⁷		
Residual FM	≤ (0.25 Hz x N) p-p in 20 ms (nominal)		
Frequency readout accuracy (start, stop, center, marker)			
± (marker frequency x frequency reference accuracy + 0.25 % x span + 5 % x RBW + 2 Hz + 0.5 x horizontal resolution ¹)			
Marker frequency counter			
Accuracy	± (marker frequency x frequency reference accuracy + 0.100 Hz)		
Delta counter accuracy	± (delta frequency x frequency reference accuracy + 0.141 Hz)		
Counter resolution	0.001 Hz		
Frequency span (FFT and swept mode)			
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument		
Resolution	2 Hz		
Accuracy			
Stepped/Swept	± (0.25 % x span + horizontal resolution)		
FFT			

1. Horizontal resolution is span/(sweep points – 1).

Sweep time and triggering			
Range	Span = 0 Hz	1 μs to 6000 s	
	Span ≥ 10 Hz	1 ms to 4000 s	
Accuracy	Span ≥ 10 Hz, swept	± 0.01 % (nominal)	
	Span ≥ 10 Hz, FFT	± 40 % (nominal)	
	Span = 0 Hz	± 0.01 % (nominal)	
Trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer		
Trigger delay	Span = 0 Hz or FFT	–150 to +500 ms	
	Span ≥ 10 Hz, swept	0 μs to 500 ms	
	Resolution	0.1 μs	
Time gating			
Gate methods	Gated LO; gated video; gated FFT		
Gate length range (except method = FFT)	100.0 ns to 5.0 s		
Gate delay range	0 to 100.0 s		
Gate delay jitter	33.3 ns p-p (nominal)		
Sweep (trace) point range			
All spans	1 to 500,001		
Resolution bandwidth (RBW)			
EMI bandwidths (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz		
EMI bandwidths (Mil STD 461 compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz		
Range (–3.01 dB bandwidth)	1 Hz to 3 MHz (10 % steps, E24 series, 24 per decade), 4, 5, 6, 8 MHz		
Bandwidth accuracy (power)	1 Hz to 750 kHz	± 1.0 % (± 0.044 dB)	
	820 kHz to 1.2 MHz (< 3.6 GHz CF)	± 2.0 % (± 0.088 dB)	
	1.3 to 2 MHz (< 3.6 GHz CF)	± 0.07 dB (nominal)	
	2.2 to 3 MHz (< 3.6 GHz CF)	± 0.15 dB (nominal)	
	4 to 8 MHz (< 3.6 GHz CF)	± 0.25 dB (nominal)	
Bandwidth accuracy (–3.01 dB)	1 Hz to 1.3 MHz	± 2 % (nominal)	
Selectivity (–60 dB/–3 dB)	4.1:1 (nominal)		
RF preselector filters	Filter band	Filter type	6 dB BW (nominal)
	20 Hz to 150 kHz	Fixed lowpass	310 kHz
	150 kHz to 1 MHz	Fixed bandpass	1.7 MHz
	1 to 2 MHz	Fixed bandpass	2.4 MHz
	2 to 5 MHz	Fixed bandpass	7.5 MHz
	5 to 8 MHz	Fixed bandpass	10 MHz
	8 to 11 MHz	Fixed bandpass	9.5 MHz
	11 to 14 MHz	Fixed bandpass	9.5 MHz
	14 to 17 MHz	Fixed bandpass	10 MHz
	17 to 20 MHz	Fixed bandpass	9.5 MHz
	20 to 24 MHz	Fixed bandpass	9.5 MHz
	24 to 30 MHz	Fixed bandpass	9.0 MHz
	30 to 70 MHz	Tracking bandpass	10 MHz
	70 to 150 MHz	Tracking bandpass	24 MHz
	150 to 300 MHz	Tracking bandpass	28 MHz
	300 to 600 MHz	Tracking bandpass	50 MHz
	600 MHz to 1 GHz	Tracking bandpass	60 MHz
	1 to 2 GHz	Tracking bandpass	180 MHz
	2 to 3.6 GHz	Fixed highpass	1.89 GHz
			(–3 dB corner frequency)

Analysis bandwidth¹

Maximum bandwidth	Option B25	25 MHz
	Standard	10 MHz

Video bandwidth (VBW)

Range	1 Hz to 3 MHz (10 % steps, E24 series 24 per decade), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)
Accuracy	± 6 % (nominal)

Measurement speed²**Standard**

Local measurement and display update rate	4 ms (250/s) (nominal)
Remote measurement and LAN transfer rate	5 ms (200/s) (nominal)
Marker peak search	1.5 ms (nominal)
Center frequency tune and transfer (RF)	20 ms (nominal)
Center frequency tune and transfer (μW)	47 ms (nominal)
Measurement/mode switching	39 ms (nominal)

Time domain sweep times

CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 100 ms, peak detector	11.4 s (nominal)
CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 1 s, quasi-peak detector	181.4 s (nominal)
CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 10 ms, peak detector	2.1 s (nominal)
CISPR band C/D, 30 MHz to 1 GHz, RBW = 9 kHz, measurement time = 10 ms, peak detector	12.6 s (nominal)
CISPR band C/D, 30 MHz to 1 GHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak detector	210.9 s (nominal)

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain.
2. Sweep points = 101.

Amplitude Accuracy and Range Specifications

Amplitude range					
Measurement range	Displayed average noise level (DANL) to maximum safe input level				
Input attenuator range	0 to 70 dB in 2 dB steps				
Maximum safe input level (with and without preamp)	RF Input 1	RF Input 2			
Average total power	+30 dBm (1 W)	+30 dBm (1 W)			
Peak pulse power	+45 dBm (31.6 W)	+50 dBm (100 W)		< 10 μs pulse width, < 1 % duty cycle and input attenuation ≥ 30 dB	
Surge power		+2k W		(10 μs pulse width)	
DC volts					
DC coupled	± 0.2 Vdc	± 0.2 Vdc			
AC coupled	± 100 Vdc	± 100 Vdc			
Display range					
Log scale	0.1 to 1 dB/division in 0.1 dB steps 1 to 20 dB/division in 1 dB steps (10 display divisions)				
Linear scale	10 divisions				
Scale units	dBm, dBmV, dBμV, dBmA, dBμA, V, W, A dBuV/m, dBuA/m, dBpT, dBG, dBpW				
Frequency response	Specification			95th percentile (≈ 2σ)	
		Option 503, 508, or 526 (RF/μW)	Option 544 (mmW)	Option 503, 508, or 526 (RF/μW)	Option 544 (mmW)
(10 dB input attenuation, 20 to 30 °C, preselector centering applied, σ = nominal standard deviation)					
Preselector off, preamp off	20 kHz to 10 MHz ¹	± 0.6 dB	± 0.6 dB	± 0.22 dB	± 0.25 dB
	10 to 50 MHz	± 0.65 dB	± 0.65 dB	± 0.22 dB	± 0.21 dB
	50 MHz to 3.6 GHz	± 0.65 dB	± 0.65 dB	± 0.22 dB	± 0.15 dB
	3.5 to 5.2 GHz	± 1.5 dB	± 1.6 dB	± 0.47 dB	± 0.6 dB
	5.2 to 8.4 GHz	± 1.5 dB	± 1.5 dB	± 0.47 dB	± 0.57 dB
	8.3 to 13.6 GHz	± 1.5 dB	± 1.5 dB	± 0.46 dB	± 0.54 dB
	13.5 to 17.1 GHz	± 1.5 dB	± 1.5 dB	± 0.53 dB	± 0.64 dB
	17 to 18 GHz	± 1.5 dB	± 1.7 dB	± 0.57 dB	± 0.72 dB
	18 to 22 GHz	± 1.7 dB	± 1.7 dB	± 0.64 dB	± 0.72 dB
	22 to 26.5 GHz	± 1.7 dB	± 1.7 dB	± 0.61 dB	± 0.71 dB
	26.4 to 34.5 GHz		± 2.5 dB		± 0.93 dB
	34.4 to 44 GHz		± 3.2 dB		± 1.24 dB
Preselector off, preamp on (0 dB attenuation)	100 kHz to 3.6 GHz ¹	± 0.75 dB		± 0.29 dB	
	100 kHz to 10 MHz		± 0.75 dB		± 0.43 dB
	10 to 50 MHz		± 0.75 dB		± 0.29 dB
	50 MHz to 3.6 GHz		± 0.75 dB		± 0.31 dB
	3.5 to 8.4 GHz	± 1.85 dB		± 0.63 dB	
	3.5 to 5.2 GHz		± 2.2 dB		± 0.9 dB
	5.2 to 8.4 GHz		± 1.85 dB		± 0.7 dB
	8.3 to 13.6 GHz	± 1.95 dB	± 1.95 dB	± 0.64 dB	± 0.79 dB
	13.5 to 17.1 GHz	± 1.8 dB	± 1.8 dB	± 0.81 dB	± 0.88 dB
	17 to 18 GHz	± 2.0 dB		± 0.95 dB	
	18 to 22 GHz	± 2.85 dB		± 1.23 dB	
	17 to 22 GHz		± 2.85 dB		± 1.07 dB
	22 to 26.5 GHz	± 2.6 dB	± 2.6 dB	± 1.37 dB	± 1.03 dB
	26.4 to 34.5 GHz		± 3.0 dB		± 1.35 dB
	34.4 to 44 GHz		± 4.1 dB		± 1.69 dB

- DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.

Frequency response (continued)		Specification		95th percentile ($\approx 2\sigma$)	
		Option 503, 508, or 526 (RF/ μ W)	Option 544 (mmW)	Option 503, 508, or 526 (RF/ μ W)	Option 544 (mmW)
Preselector on, preamp off	20 Hz to 300 MHz ¹	± 0.65 dB	± 0.65 dB	± 0.30 dB	± 0.3 dB
	300 MHz to 1 GHz	± 0.65 dB	± 0.65 dB	± 0.28 dB	± 0.28 dB
	1 to 3.6 GHz	± 0.85 dB	± 0.85 dB	± 0.36 dB	± 0.36 dB
	3.5 to 8.4 GHz	± 1.5 dB		± 0.47 dB	
	3.5 to 5.2 GHz		± 1.6 dB		± 0.6 dB
	5.2 to 8.4 GHz		± 1.5 dB		± 0.57 dB
	8.3 to 13.6 GHz	± 1.5 dB	± 1.5 dB	± 0.46 dB	± 0.54 dB
	13.5 to 17.1 GHz	± 1.5 dB	± 1.5 dB	± 0.53 dB	± 0.64 dB
	17 to 18 GHz	± 1.5 dB	± 1.7 dB	± 0.57 dB	± 0.72 dB
	18 to 22 GHz	± 1.7 dB	± 1.7 dB	± 0.64 dB	± 0.72 dB
	22 to 26.5 GHz	± 1.7 dB	± 1.7 dB	± 0.61 dB	± 0.71 dB
	26.4 to 34.5 GHz		± 2.5 dB		± 0.93 dB
	34.4 to 44 GHz		± 3.2 dB		± 1.24 dB
Preselector on, preamp on (0 dB attenuation)	1 kHz to 30 MHz ¹	± 0.8 dB	± 0.8 dB	± 0.36 dB	± 0.36 dB
	30 to 300 MHz ¹	± 0.7 dB	± 0.70 dB	± 0.29 dB	± 0.29 dB
	300 MHz to 1 GHz	± 0.65 dB	± 0.65 dB	± 0.30 dB	± 0.30 dB
	1 to 2.75 GHz	± 0.95 dB	± 0.95 dB	± 0.45 dB	± 0.45 dB
	2.75 to 3.6 GHz	± 1.15 dB	± 1.15 dB	± 0.55 dB	± 0.55 dB
	3.5 to 8.4 GHz	± 1.85 dB		± 0.63 dB	
	3.5 to 5.2 GHz		± 2.2 dB		± 0.9 dB
	5.2 to 8.4 GHz		± 1.85 dB		± 0.7 dB
	8.3 to 13.6 GHz	± 1.95 dB	± 1.95 dB	± 0.64 dB	± 0.79 dB
	13.5 to 17.1 GHz	± 1.8 dB	± 1.8 dB	± 0.81 dB	± 0.88 dB
	17 to 18 GHz	± 2.0 dB	± 2.85 dB	± 0.95 dB	± 1.07 dB
	18 to 22 GHz	± 2.85 dB	± 2.85 dB	± 1.23 dB	± 1.07 dB
	22 to 26.5 GHz	± 2.6 dB	± 2.6 dB	± 1.37 dB	± 1.03 dB
	26.4 to 34.5 GHz		± 3.0 dB		± 1.35 dB
	34.4 to 44 GHz		± 4.1 dB		± 1.69 dB

1. DC coupling required to meet specifications below 50 MHz. With AC coupling, specifications apply at frequencies of 50 MHz and higher. Statistical observations at 10 MHz with AC coupling show that most instruments meet the DC-coupled specifications, however, a small percentage of instruments are expected to have errors exceeding 0.5 dB at 10 MHz at the temperature extreme. The effect at 20 to 50 MHz is negligible but not warranted.

Input attenuation switching uncertainty		Specifications	
Attenuation > 2 dB, preamp off	50 MHz	± 0.20 dB	± 0.08 dB (typical)
Relative to 10 dB (reference setting)	(reference frequency)		
Absolute amplitude accuracy		Specifications	95th percentile ($\approx 2\sigma$)
(10 dB attenuation, 20 to 30 °C, 1 Hz $\leq$ RBW $\leq$ 1 MHz, input signal -10 to -50 dBm, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)			
Preselector off and on, preamp off and on			
RF Input 1 to 44 GHz	At 50 MHz	± 0.33 dB	± 0.25 dB
	At all frequencies	$\pm (0.33 \text{ dB} + \text{frequency response})$	
RF Input 2 to 1 GHz	At 50 MHz	± 0.36 dB	± 0.27 dB
	At all frequencies	$\pm (0.36 \text{ dB} + \text{frequency response})$	

Input voltage standing wave ratio (VSWR)		Input attenuation 0 dB	Input attenuation ≥ 10 dB
Preselector off, preamp on and off			
DC coupled	1 to 18 GHz	3.0:1	2.0:1
	18 to 26.5 GHz	3.0:1	2.0:1
	26.5 to 40 GHz	3.0:1	2.5:1
	40 to 44 GHz	—	—
AC coupled	1 to 18 GHz	3.0:1	2.0:1
	18 to 26.5 GHz	3.0:1	2.4:1
Preselector on, preamp on and off			
DC coupled	9 kHz to 1 GHz	2.0:1	1.2:1
	1 to 26.5 GHz	3.0:1	2.0:1
	26.5 to 40 GHz	3.0:1	2.5:1
	40 to 44 GHz	—	—
AC coupled	50 MHz to 1 GHz	2.0:1	1.2:1
	1 to 18 GHz	3.0:1	2.0:1
	18 to 26.5 GHz	3.0:1	2.4:1
Resolution bandwidth switching uncertainty (referenced to 30 kHz RBW)			
1 Hz to 1.5 MHz RBW	± 0.05 dB		
1.6 to 3 MHz RBW	± 0.10 dB		
4, 5, 6, 8 MHz RBW	± 1.0 dB		
Reference level			
Range			
Log scale	–170 to +30 dBm in 0.01 dB steps		
Linear scale	Same as log (707 pV to 7.07 V)		
Accuracy	0 dB		
Display scale switching uncertainty			
Switching between linear and log	0 dB		
Log scale/div switching	0 dB		
Display scale fidelity			
Between –10 dBm and –80 dBm input mixer level	± 0.10 dB total		
Total measurement uncertainty ¹		95th percentile (≈ 2σ)	
Signal level 0 to 90 dB below reference point, RF attenuation 0 to 40 dB, RBW ≤ 3 MHz, 20° to 30° C: AC coupled 10 MHz to 26.5 GHz DC coupled 9 kHz to 40 GHz			
		Option 503, 508, or 526 (RF/μW)	Option 544 (mmW)
Presel off, preamp off	9 kHz to 2 GHz	± 0.50 dB	± 0.50 dB
	2 to 3.6 GHz	± 0.60 dB	± 0.60 dB
	3.6 to 8 GHz	± 0.80 dB	± 1.70 dB
	8 to 18 GHz	± 1.10 dB	± 1.30 dB
	18 to 26.5 GHz	± 1.60 dB	± 1.60 dB
	26.5 to 40 GHz		± 1.70 dB
	40 to 44 GHz		± 2.30 dB
Presel off, preamp on	100 kHz to 2 GHz	± 0.60 dB	± 0.30 dB
	2 to 3.6 GHz	± 0.60 dB	± 0.50 dB
	3.6 to 8 GHz	± 1.10 dB	± 1.80 dB
	8 to 18 GHz	± 1.30 dB	± 1.30 dB
	18 to 26.5 GHz	± 1.90 dB	± 1.90 dB
	26.5 to 40 GHz		± 1.90 dB
	40 to 44 GHz		± 2.40 dB

1. Specified for instruments with prefixes MY/SG5322 or greater.

Total measurement uncertainty ¹ (continued)		95th percentile (≈ 2σ)	
Presel on, preamp off	9 kHz to 2 GHz	± 0.50 dB	± 0.50 dB
	2 to 3.6 GHz	± 0.50 dB	± 0.50 dB
	3.6 to 8 GHz	± 0.80 dB	± 1.70 dB
	8 to 18 GHz	± 1.10 dB	± 1.30 dB
	18 to 26.5 GHz	± 1.60 dB	± 1.60 dB
	26.5 to 40 GHz		± 1.70 dB
	40 to 44 GHz		± 2.40 dB
Presel on, preamp on	9 kHz to 2 GHz	± 0.50 dB	± 0.50 dB
	2 to 3.6 GHz	± 0.70 dB	± 0.70 dB
	3.6 to 8 GHz	± 1.10 dB	± 1.80 dB
	8 to 18 GHz	± 1.30 dB	± 1.30 dB
	18 to 26.5 GHz	± 1.90 dB	± 1.90 dB
	26.5 to 40 GHz		± 1.90 dB
	40 to 44 GHz		± 2.40 dB
Trace detectors			
Normal, peak, sample, negative peak, log power average, RMS average, and voltage average			
CISPR detectors: quasi-peak, EMI-avg, RMS-avg			
Preamplifier			
Gain			
Preselector off	100 kHz to 3.6 GHz	+20 dB (nominal)	
	3.6 to 26.5 GHz	+35 dB (nominal)	
	26.5 to 44 GHz	+40 dB (nominal)	
Preselector on	9 kHz to 3.6 GHz	+20 dB (nominal)	
	3.6 to 26.5 GHz	+35 dB (nominal)	
	26.5 to 44 GHz	+40 dB (nominal)	
Amplitude probability distribution		Meets CISPR16-1-1:2010 requirements	
Dynamic range	> 70 dB		
Amplitude accuracy	< ± 2.7 dB		
Maximum measureable time period (no dead time)	3 minutes		
Minimum measureable probability	10 ⁻⁷		
Amplitude level assignment	1000 levels		
Sampling rate	≥ 10 MSa/s (within a 1 MHz RBW)		
Amplitude resolution	0.1881 dB		

1. Specified for instruments with prefixes MY/SG5322 or greater.

Dynamic Range Specifications

1 dB gain compression		Specification		Typical	
		Maximum power at mixer			
	Frequency range	Option 503, 508, or 526 (RF/μW)	Option 544 (mmW)	Option 503, 508, or 526 (RF/μW)	Option 544 (mmW)
RF Input 1 to 44 GHz (RF Input 2 to 1 GHz, performance = RF Input 1 performance + 9 dB)					
Preselector on and off, preamp off	9 kHz to 10 MHz			+4 dBm (nominal)	
	10 to 500 MHz	0 dBm		+3 dBm (typical)	
	500 MHz to 3.6 GHz	+1 dBm		+5 dBm (typical)	
	3.6 to 26.5 GHz	0 dBm		+4 dBm (typical)	
	26.4 to 44 GHz				+2 dBm (nominal)
Preselector off, preamp on	10 MHz to 3.6 GHz			-10 dBm (nominal)	-13 dBm (nominal)
	3.6 to 26.5 GHz				
	Tone spacing 100 kHz to 20 MHz			-26 dBm (nominal)	-32 dBm (nominal)
	Tone spacing > 70 MHz			-16 dBm (nominal)	-16 dBm (nominal)
	26.4 to 44 GHz				-30 dBm (nominal)
Preselector on, preamp on	9 kHz to 10 MHz			-16 dBm (nominal)	-16 dBm (nominal)
	10 to 2 GHz			-18 dBm (typical)	-21 dBm (typical)
	2 GHz to 3.6 GHz			-16 dBm (typical)	-17 dBm (typical)
	3.6 to 26.5 GHz				
	Tone spacing, 100 kHz to 20 MHz			-26 dBm (nominal)	-26 dBm (nominal)
	Tone spacing > 70 MHz			-16 dBm (nominal)	-16 dBm (nominal)
	26.4 to 44 GHz				-30 dBm (nominal)
Displayed average noise level (DANL)					
(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C)					
RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB					
		Specification	Typical including NFE ¹		
Preselector off, preamp off	20 Hz ²	-97 dBm	—		
	100 Hz ²	-106 dBm	—		
	1 kHz ²	-118 dBm	—		
	9 kHz	-119 dBm	—		
	100 kHz	-131 dBm	—		
	1 MHz	-150 dBm	—		
	10 MHz to 2.1 GHz	-150 dBm	-158 dBm		
	2.1 to 3.6 GHz	-148 dBm	-157 dBm		
	3.5 to 8.4 GHz	-148 dBm	-159 dBm		
	Option 544 only	-145 dBm	-153 dBm		
	8.3 to 13.6 GHz	-147 dBm	-158 dBm		
	13.5 to 17.1 GHz	-141 dBm	-151 dBm		
	17.0 to 20.0 GHz	-142 dBm	-152 dBm		
	20.0 to 26.5 GHz	-135 dBm	-146 dBm		
	26.4 to 34.5 GHz (Option 544 only)	-141 dBm	-148 dBm		
	34.4 to 44 GHz (Option 544 only)	-135 dBm	-143 dBm		
Preselector off, preamp on	100 kHz	-144 dBm	—		
	1 MHz	-162 dBm	—		
	10 MHz to 2.1 GHz	-163 dBm	-175 dBm		
	2.1 to 3.6 GHz	-161 dBm	-173 dBm		
	3.5 to 8.4 GHz	-164 dBm	-172 dBm		
	Option 544 only	-161 dBm	-166 dBm		
	8.3 to 13.6 GHz	-162 dBm	-173 dBm		
	Option 544 only	-161 dBm	-170 dBm		
	13.5 to 17.1 GHz	-160 dBm	-171 dBm		
	17.0 to 20.0 GHz	-158 dBm	-165 dBm		
	20.0 to 26.5 GHz	-155 dBm	-162 dBm		
	26.4 to 34.5 GHz (Option 544 only)	-156 dBm	-164 dBm		
	34.4 to 44 GHz (Option 544 only)	-150 dBm	-158 dBm		

1. Typical Indicated Noise including NFE = typical DANL+ Bandwidth and Log corrections-DANL improvement with NFE

2. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

Displayed average noise level (DANL) (continued)			
(Input terminated, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain = High, 20 to 30 °C) RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB			
		Specification	Typical including NFE ¹
Preselector on, preamp off	20 Hz ³	-92 dBm	-100 dBm ²
	100 Hz ³	-101 dBm	-109 dBm ²
	1 kHz ³	-114 dBm	-120 dBm ²
	9 kHz	-118 dBm	-132 dBm
	100 kHz	-130 dBm	-143 dBm
	1 to 3 MHz	-147 dBm	-158 dBm
	3 to 30 MHz	-150 dBm	-160 dBm
	30 to 300 MHz	-151 dBm	-161 dBm
	300 to 600 MHz	-153 dBm	-164 dBm
	600 MHz to 1 GHz	-151 dBm	-162 dBm
	1 to 2 GHz	-150 dBm	-161 dBm
	2 to 2.5 GHz	-152 dBm	-164 dBm
	2.5 to 3 GHz	-151 dBm	-163 dBm
	3 to 3.6 GHz	-148 dBm	-161 dBm
	3.5 to 8.4 GHz	-148 dBm	-159 dBm
	Option 544 only	-145 dBm	-153 dBm
	8.3 to 13.6 GHz	-147 dBm	-158 dBm
	Option 544 only	-147 dBm	-156 dBm
	13.5 to 17.1 GHz	-141 dBm	-151 dBm
	17.0 to 20.0 GHz	-142 dBm	-152 dBm
	20.0 to 26.5 GHz	-135 dBm	-146 dBm
	26.4 to 34.5 GHz (Option 544 only)	-141 dBm	-148 dBm
	34.4 to 44 GHz (Option 544 only)	-135 dBm	-143 dBm
Preselector on, preamp on	1 kHz ³	-119 dBm	-133 dBm ²
	9 kHz	-143 dBm	-154 dBm
	100 kHz	-154 dBm	-165 dBm
	1 to 2 MHz	-166 dBm	-178 dBm
	2 to 30 MHz	-158 dBm	-167 dBm
	30 to 600 MHz	-159 dBm	-166 dBm
	600 to 800 MHz	-157 dBm	-166 dBm
	800 MHz to 1 GHz	-158 dBm	-167 dBm
	1 to 2 GHz	-156 dBm	-164 dBm
	2 to 2.75 GHz	-160 dBm	-168 dBm
	2.75 to 3.6 GHz	-157 dBm	-165 dBm
	3.5 to 8.4 GHz	-164 dBm	-172 dBm
	Option 544 only	-161 dBm	-166 dBm
	8.3 to 13.6 GHz	-162 dBm	-173 dBm
	Option 544 only	-161 dBm	-170 dBm
	13.5 to 17.1 GHz	-160 dBm	-171 dBm
	17.0 to 20.0 GHz	-158 dBm	-165 dBm
	20.0 to 26.5 GHz	-155 dBm	-162 dBm
	26.4 to 34.5 GHz (Option 544 only)	-156 dBm	-164 dBm
	34.4 to 44 GHz (Option 544 only)	-150 dBm	-158 dBm

1. Typical DANL including NFE = Typical DANL-DANL improvement with NFE.

2. No NFE factor at this frequency.

3. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

Indicated noise in CISPR BW		
Calculated from DANL data; EMI-AVG detector, 0 dB input attenuation; indicated RBW is CISPR RBW RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +11 dB		
		Typical including NFE ¹
Preselector on, preamp off	20 Hz (1 Hz RBW) ³	+9 dBuV ²
	100 Hz (10 Hz) ³	+10 dBuV ²
	1 kHz (100 Hz) ³	+9 dBuV ²
	9 kHz (200 Hz RBW)	-2 dBuV
	100 kHz (200 Hz)	-13 dBuV
	1 to 3 MHz (9 kHz)	-11 dBuV
	3 to 30 MHz (9 kHz)	-13 dBuV
	30 to 300 MHz (120 kHz)	-3 dBuV
	300 to 600 MHz (120 kHz)	-6 dBuV
	600 MHz to 1 GHz (120 kHz)	-4 dBuV
	1 to 2 GHz (1 MHz)	+6 dBuV
	2 to 2.5 GHz (1 MHz)	+3 dBuV
	2.5 to 3 GHz (1 MHz)	+4 dBuV
	3 to 3.6 GHz (1 MHz)	+6 dBuV
	3.5 to 8.4 GHz (1 MHz)	+8 dBuV
	Option 544 only	+14 dBuV
	8.3 to 13.6 GHz (1 MHz)	+9 dBuV
	Option 544 only	+11 dBuV
	13.5 to 17.1 GHz (1 MHz)	+16 dBuV
	17.0 to 20.0 GHz (1 MHz)	+15 dBuV
	20.0 to 26.5 GHz (1 MHz)	+21 dBuV
	26.4 to 34.5 GHz (1 MHz) (Option 544 only)	+19 dBuV
	34.4 to 44 GHz (1 MHz) (Option 544 only)	+24 dBuV
Preselector on, preamp on	1 kHz (100 Hz RBW) ³	-4 dBuV ²
	9 kHz (200 Hz RBW)	-24 dBuV
	100 kHz (200 Hz)	-35 dBuV
	1 to 2 MHz (9 kHz)	-31 dBuV
	2 to 30 MHz (9 kHz)	-20 dBuV
	30 to 600 MHz (120 kHz)	-8 dBuV
	600 to 800 MHz (120 kHz)	-8 dBuV
	800 MHz to 1 GHz (120 kHz)	-9 dBuV
	1 to 2 GHz (1 MHz)	+2 dBuV
	2 to 2.75 GHz (1 MHz)	-1 dBuV
	2.75 to 3.6 GHz (1 MHz)	+3 dBuV
	3.5 to 8.4 GHz (1 MHz)	-5 dBuV
	Option 544 only	-1 dBuV
	8.3 to 13.6 GHz (1 MHz)	-6.0 dBuV
	Option 544 only	-4 dBuV
	13.5 to 17.1 GHz (1 MHz)	-4 dBuV
	17.0 to 20.0 GHz (1 MHz)	+2 dBuV
	20.0 to 26.5 GHz (1 MHz)	+5 dBuV
	26.4 to 34.5 GHz (1 MHz) (Option 544 only)	+3 dBuV
	34.4 to 44 GHz (1 MHz) (Option 544 only)	+9 dBuV

1. Typical Indicated Noise including NFE = Typical DANL+ Bandwidth and Log corrections-DANL improvement with NFE

2. No NFE factor at this frequency.

3. Specified for instruments with prefixes MY/SG5213 or greater. Nominal for instruments with earlier prefixes.

Spurious responses			
RF Input 1; preselector on and off			
Residual responses ¹ (Input terminated and 0 dB attenuation)	200 kHz to 8.4 GHz (swept) Zero span or FFT or other frequencies	-100 dBm -100 dBm (nominal)	
Image responses	10 MHz to 3.6 GHz 3.5 to 13.6 GHz 13.5 to 17.1 GHz 17.0 to 22 GHz 22 to 26.5 GHz 26.5 to 34.5 GHz 34.4 to 44 GHz	-80 dBc (-108 dBc typical) -78 dBc (-88 dBc typical) -74 dBc (-85 dBc typical) -70 dBc (-82 dBc typical) -68 dBc (-78 dBc typical) -70 dBc (-94 dBc typical) -60 dBc (-79 dBc typical)	
LO related spurious (f > 600 MHz from carrier)	10 MHz to 3.6 GHz	-90 dBc + 20xlogN ² (typical)	
Other spurious f ≥ 10 MHz from carrier	Carrier frequency ≤ 26.5 GHz Carrier frequency > 26.5 GHz	-80 dBc + 20xlogN ² -90 dBc	
Second harmonic distortion (SHI)			
RF Input 1; input power -9 dBm, input attenuation 6 dB; RF Input 2 to 1 GHz. RF Input 2 performance = RF Input 1 performance +9 dB			
	Source frequency	Specification	Typical
Preselector off, preamp off	10 MHz to 1.25 GHz	+45 dBm	+54 dBm
	1.25 to 1.8 GHz	+41 dBm	+50 dBm
	1.75 to 6.8 GHz	+65 dBm	+68 dBm
	Option 544 only	+61 dBm	+68 dBm
	6.8 to 11 GHz	+55 dBm	+64 dBm
	11 to 13.25 GHz	+50 dBm	+60 dBm
	13.2 to 22 GHz (Option 544)		+51 dBm (nominal)
Preselector off, preamp on Preamp power = -45 dBm Preamp power = -50 dBm	10 MHz to 1.8 GHz		+33 dBm (nominal)
	1.8 to 13.25 GHz		+10 dBm (nominal)
	13.2 to 22 GHz (Option 544)		+0 dBm (nominal)
Preselector on, preamp off	10 to 30 MHz	+47 dBm	+50 dBm
	30 to 500 MHz	+57 dBm	+63 dBm
	500 MHz to 1GHz	+46 dBm	+48 dBm
	1 to 1.6 GHz	+58 dBm	+70 dBm
	1.6 to 1.8 GHz	+46 dBm	+52 dBm
	1.75 to 6.8 GHz	+65 dBm	+68 dBm
	6.8 to 11 GHz	+55 dBm	+64 dBm
	11 to 13.25 GHz	+50 dBm	+60 dBm
	13.2 to 22 GHz (Option 544)		+51 dBm (nominal)
Preselector on, preamp on, Input power = -9 dBm Attenuation = 26 dB	10 to 300 MHz		+53 dBm (nominal)
	300 to 500 MHz		+58 dBm (nominal)
	500 MHz to 1 GHz		+47 dBm (nominal)
	1 to 1.6 GHz		+53 dBm (nominal)
	1.6 to 1.8 GHz		+30 dBm (nominal)
Input power = -25 dBm, Attenuation = 20 dB	1.8 to 13.25 GHz		+10 dBm (nominal)
	13.2 to 22 GHz (Option 544)		+0 dBm (nominal)

1. RF2 performance = RF1 performance +11 dB

2. N is the LO multiplication factor.

Third-order intermodulation distortion (TOI)

(Two -14 dBm tones at input and 4 dB of input attenuation; tone separation > 5 times IF prefilter bandwidth, 20 to 30 °C, see Specifications Guide for IF prefilter bandwidths); RF Input 1; RF Input 2 to 1 GHz; RF Input 2 performance = RF Input 1 performance +9 dB

		TOI	TOI (typical)
Preselector off, preamp off	10 to 100 MHz	+12 dBm	+17 dBm
	100 to 400 MHz	+15 dBm	+20 dBm
	400 MHz to 1.7 GHz	+16 dBm	+20 dBm
	1.7 to 3.6 GHz	+16 dBm	+19 dBm
	3.5 to 8.4 GHz	+15 dBm	+18 dBm
	8.3 to 13.6 GHz	+15 dBm	+18 dBm
	13.5 to 26.5 GHz	+10 dBm	+14 dBm
	26.4 to 44 GHz (<i>Option 544</i>)		+14 dBm (nominal)
Preselector off, preamp on	10 to 500 MHz		+4 dBm (nominal)
	500 MHz to 3.6 GHz		+5 dBm (nominal)
	3.6 to 26.5 GHz		-15 dBm (nominal)
	26.4 to 44 GHz (<i>Option 544</i>)		-17 dBm (nominal)
Preselector on, preamp off	10 to 30 MHz	+12 dBm	+16 dBm
	30 MHz to 1 GHz	+12.5 dBm	+15 dBm
	1 to 1.5 GHz	+12.5 dBm	+14 dBm
	1.5 to 3.6 GHz	+14.5 dBm	+16 dBm
	3.5 to 8.4 GHz	+15 dBm	+18 dBm
	8.3 to 13.6 GHz	+15 dBm	+18 dBm
	13.5 to 26.5 GHz	+10 dBm	+14 dBm
	26.4 to 44 GHz (<i>Option 544</i>)		+14 dBm (nominal)
Preselector on, preamp on	10 to 30 MHz	-9 dBm	-5 dBm
	30 MHz to 1 GHz	-9 dBm	-4 dBm
	1 to 2 GHz	-4 dBm	-2 dBm
	2 to 3.6 GHz	-6 dBm	-3 dBm
	3.6 to 26.5 GHz		-15 dBm (nominal)
	26.4 to 44 GHz (<i>Option 544</i>)		-17 dBm (nominal)
Phase noise²	Offset	Specification	Typical
Noise sidebands (20 to 30 °C, CF = 1 GHz)	100 Hz	-84 dBc/Hz	-88 dBc/Hz
	1 kHz		-101 dBc/Hz (nominal)
	10 kHz	-103 dBc/Hz	-106 dBc/Hz
	100 kHz	-115 dBc/Hz	-117 dBc/Hz
	1 MHz	-135 dBc/Hz	-137 dBc/Hz
	10 MHz		-148 dBc/Hz (nominal)

1. Preamp input power = input power-input attenuation (-9 dB for input 2).

2. For nominal values, refer to Figure 1.

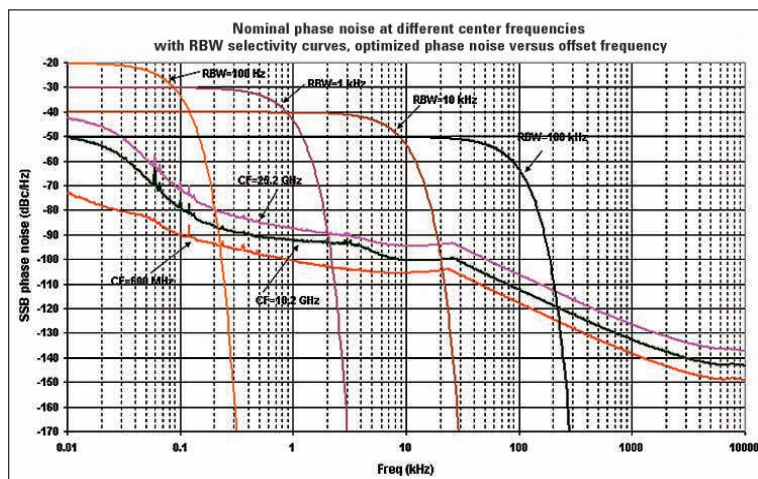


Figure 1. Nominal phase noise at different center frequencies

PowerSuite Measurement Specifications

Channel power

Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, at-tenuation = 10 dB) ± 0.82 dB (± 0.23 dB 95th percentile)

Occupied bandwidth

Frequency accuracy $\pm [\text{span}/1000]$ (nominal)

Adjacent channel power

Accuracy, W-CDMA (ACLR)

(at specific mixer levels and ACLR ranges)

	Adjacent	Alternate
MS	± 0.14 dB	± 0.21 dB
BTS	± 0.49 dB	± 0.44 dB

Dynamic range (typical)

Without noise correction

-73 dB

-79 dB

With noise correction

-78 dB

-82 dB

Offset channel pairs measured

1 to 6

ACP measurement and transfer time (fast method)

14 ms (nominal) ($\sigma = 0.2$ dB)

Multiple number of carriers measured

Up to 12

Power statistics CCDF

Histogram resolution

0.01 dB

Harmonic distortion

Maximum harmonic number

10th

Result

Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %

Intermod (TOI)

Measure the third-order products and intercepts from two tones

Burst power

Methods

Power above threshold, power within burst width

Results

Single burst output power, average output power, maximum power, minimum power within burst, burst width

Spurious emission

W-CDMA (1 to 3.6 GHz) table-driven spurious signals; search across regions

Dynamic range

96.7 dB

101.7 dB (typical)

Absolute sensitivity

-85.4 dBm

Spectrum emission mask (SEM)

cdma2000® (750 kHz offset)

Relative dynamic range (30 kHz RBW)

78.9 dB

Absolute sensitivity

-100.7 dBm

85 dB (typical)

Relative accuracy

± 0.12 dB

3GPP W-CDMA (2.515 MHz offset)

Relative dynamic range (30 kHz RBW)

81.9 dB

Absolute sensitivity

-100.7 dBm

88.2 dB (typical)

Relative accuracy

± 0.12 dB

General Specifications

Temperature range

Operating	0 to 55 °C
Storage	–40 to 70 °C

EMC

Complies with European EMC Directive 2004/108/EC

- IEC/EN 61326-2-1
- CISPR Pub 11 Group 1, class B
- AS/NZS CISPR 11
- ICES/NMB-001

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme à la norme NMB-001 du Canada

Radio disturbance measuring apparatus

CISPR 16-1-1	The features in this instrument comply with the performance requirements of this basic standard ¹
--------------	--

Safety

Complies with European Low Voltage Directive 2006/95/EC

- IEC/EN 61010-1 2nd Edition
- Canada: CSA C22.2 No. 61010-01-04
- USA: UL 61010-1 2nd Edition

Acoustic noise emission

Geraeuschemission

LpA < 70 dB	LpA < 70 dB
Operator position	Am Arbeitsplatz
Normal position	Normaler Betrieb
Per ISO 7779	Nach DIN 45635 t.19

Environmental stress

Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3

1. Noise Floor Extension (NFE) required for isolated pulse in bands C and D only.

Power requirements

Voltage and frequency (nominal)	100 to 120 V, 50/60/400 Hz 220 to 240 V, 50/60 Hz
---------------------------------	--

Power consumption

On	450 W maximum
Standby	20 W

Display

Resolution	1024 x 768, XGA
Size	213 mm (8.4 in.) diagonal (nominal)

Data storage

Internal	≥ 80 GB (nominal) (removable solid state drive)
External	Supports USB 2.0 compatible memory devices

Weight (without options)

Net	24 kg (52 lbs) (nominal)
Shipping	36 kg (79 lbs) (nominal)

Dimensions

Height	177 mm (7.0 in)
Width	431 mm (17.0 in)
Length	535 mm (21.0 in)

Warranty

The MXE EMI receiver is supplied with a 3-year warranty

Calibration cycle

The recommended calibration cycle is one year; calibration services are available through Keysight service centers

Inputs and Outputs

Front panel

RF input	
RF Input 1 Connector	Type-N female, 50 Ω (nominal) (Standard) 3.5 mm male, 50 Ω (Opt C35) 2.4 mm male, 50 Ω (Option 544 only)
RF Input 2 Connector	Type-N female, 50 Ω (nominal) (Standard)

Probe power	
Voltage/current	+15 Vdc, $\pm 7\%$ at 150 mA max (nominal) -12.6 Vdc, $\pm 10\%$ at 150 mA max (nominal)

USB 2.0 ports	
Master (2 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A (nominal)

Rear panel

10 MHz out	
Connector	BNC female, 50 Ω (nominal)
Output amplitude	≥ 0 dBm (nominal)
Frequency	10 MHz $\times$ (1+ frequency reference accuracy)

Ext Ref In	
Connector	BNC female, 50 Ω (nominal)
Input amplitude range	-5 to 10 dBm (nominal)
Input frequency	1 to 50 MHz (nominal)
Frequency lock range	$\pm 5 \times 10^{-6}$ of specified external reference input frequency

Trigger 1 and 2 inputs	
Connector	BNC female
Impedance	$> 10 \text{ k}\Omega$ (nominal)
Trigger level range	-5 to 5 V

Trigger 1 and 2 outputs	
Connector	BNC female
Impedance	50 Ω (nominal)
Level	0 to 5 V (CMOS)

Rear panel (continued)

Monitor output	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1024 x 768
Noise source drive +28 V (pulsed)	
Connector	BNC female
SNS Series noise source	
Analog out	
Connector	BNC female (used by Option YAS)
USB 2.0 ports	
Master (4 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	0.5 A (nominal)
Slave (1 port)	
Standard	Compatible with USB 2.0
Connector	USB Type-B female
GPIO interface	
Connector	IEEE-488 bus connector
GPIO codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
GPIO mode	Controller or device
LAN TCP/IP interface	
Standard	1000Base-T
Connector	RJ45 Ethertwist
Aux I/O connector	
Connector	25-pin D-SUB

I/Q Analyzer

Resolution bandwidth (spectrum measurement)

Range	
Overall	100 mHz to 3 MHz
Span = 1 MHz	50 Hz to 1 MHz
Span = 10 kHz	1 Hz to 10 kHz
Span = 100 Hz	100 mHz to 100 Hz

Window shapes

Flat top, Uniform, Hanning, Hamming, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70 dB, K-B 90 dB and K-B 110 dB)

Analysis bandwidth

Standard instrument	10 Hz to 10 MHz
Option B25	10 Hz to 25 MHz

IF frequency response (standard 10 MHz IF path)

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Max. error	RMS (nominal)
≤ 3.6	≤ 10	± 0.40 dB	0.04 dB
$3.6 < f \leq 26.5$	≤ 10		0.25 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Peak-to-peak	RMS
≤ 3.6	≤ 10	$\pm 0.5^\circ$	0.2°
$3.6 < f \leq 26.5$	≤ 10	$\pm 1.5^\circ$	0.4°

Data acquisition (10 MHz IF path)

Time record length

IQ analyzer	4,000,000 IQ sample pairs		
89600 VSA software or N9064A	32-bit packing	64-bit packing	Memory
	62.5 MSa	31.25 MSa	256 MB
Sample rate	90 MSa/s		
ADC resolution	14 bits		

Option B25 25 MHz analysis bandwidth

IF frequency response (B25 IF path)

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30 °C)

Center frequency (GHz)	Span (MHz)	Max. error	RMS (nominal)
≤ 3.6	10 to ≤ 25	± 0.45 dB	0.051 dB
$3.6 < f \leq 26.5$	10 to ≤ 25		0.45 dB

IF phase linearity (deviation from mean phase linearity, nominal)

Center frequency (GHz)	Span (MHz)	Peak-to-peak	RMS
$0.02 \leq f < 3.6$	≤ 25	$\pm 0.5^\circ$	0.2°
$3.6 \leq f \leq 26.5$	≤ 25	$\pm 1.5^\circ$	0.4°

Data acquisition (B25 IF path)

Time record length (IQ pairs)

IQ analyzer	4,000,000 IQ sample pairs		
89600 VSA software or N9064A	32-bit packing	64-bit packing	Memory
	62.5 MSa	31.25 MSa	256 MB
Sample rate	90 MSa/s		
ADC resolution	14 bits		

Related Literature

Keysight MXE EMI receiver

Publication title	Publication number
MXE EMI Receiver, Configuration Guide	5990-7419EN
MXE EMI Receiver, Brochure	5990-7422EN

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-09-23-14)

This information is subject to change without notice.
 © Keysight Technologies, 2012 – 2014
 Published in USA, December 19, 2014
 5990-7421EN
www.keysight.com

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



www.keysight.com/go/quality

Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2008
 Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000 is a US registered certification mark of the Telecommunications Industry Association.

www.keysight.com/find/mxe