



Directional 30 dB N Coupler From 4 GHz  
to 12 GHz Rated To 600 Watts

TECHNICAL DATA SHEET

PE2235-30

**Directional 30 dB N Coupler From 4 GHz to 12 GHz Rated To 600 Watts**

**Configuration**

Connector 1	N Female
Connector 2	SMA Female
Connector 3	SMA Female
Design	Directional Coupler

**Electrical Specifications**

Frequency Range, GHz	4 to 12
Directivity, dB	15
Impedance, Ohms	50
Maximum Insertion Loss, dB	0.2
Maximum Input Power, Watts	600
Maximum Input VSWR	1.3:1
Peak Power, KWatts	10
Coupling Value, dB	30
Coupling Tolerance, dB	± 1
Frequency Sensitivity, dB	0.6

**Mechanical Specifications**

**Size**

Length, in [mm]	3.98 [101.09]
Width, in [mm]	0.8 [20.32]
Height, in [mm]	1.6 [40.64]

**Connector 1**

Type	N Female
------	----------

**Connector 2**

Type	SMA Female
------	------------

**Connector 3**

Type	SMA Female
------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 30 dB N Coupler From 4 GHz to 12 GHz Rated To 600 Watts PE2235-30](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Directional 30 dB N Coupler From 4 GHz  
to 12 GHz Rated To 600 Watts

TECHNICAL DATA SHEET

PE2235-30

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

Directional 30 dB N Coupler From 4 GHz to 12 GHz Rated To 600 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 30 dB N Coupler From 4 GHz to 12 GHz Rated To 600 Watts PE2235-30](http://www.pasternack.com/directional-30-db-n-coupler-4-12-ghz-600-watts-pe2235-30-p.aspx)

URL: <http://www.pasternack.com/directional-30-db-n-coupler-4-12-ghz-600-watts-pe2235-30-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE2235-30 CAD Drawing

Directional 30 dB N Coupler From 4 GHz to 12 GHz Rated To 600 Watts

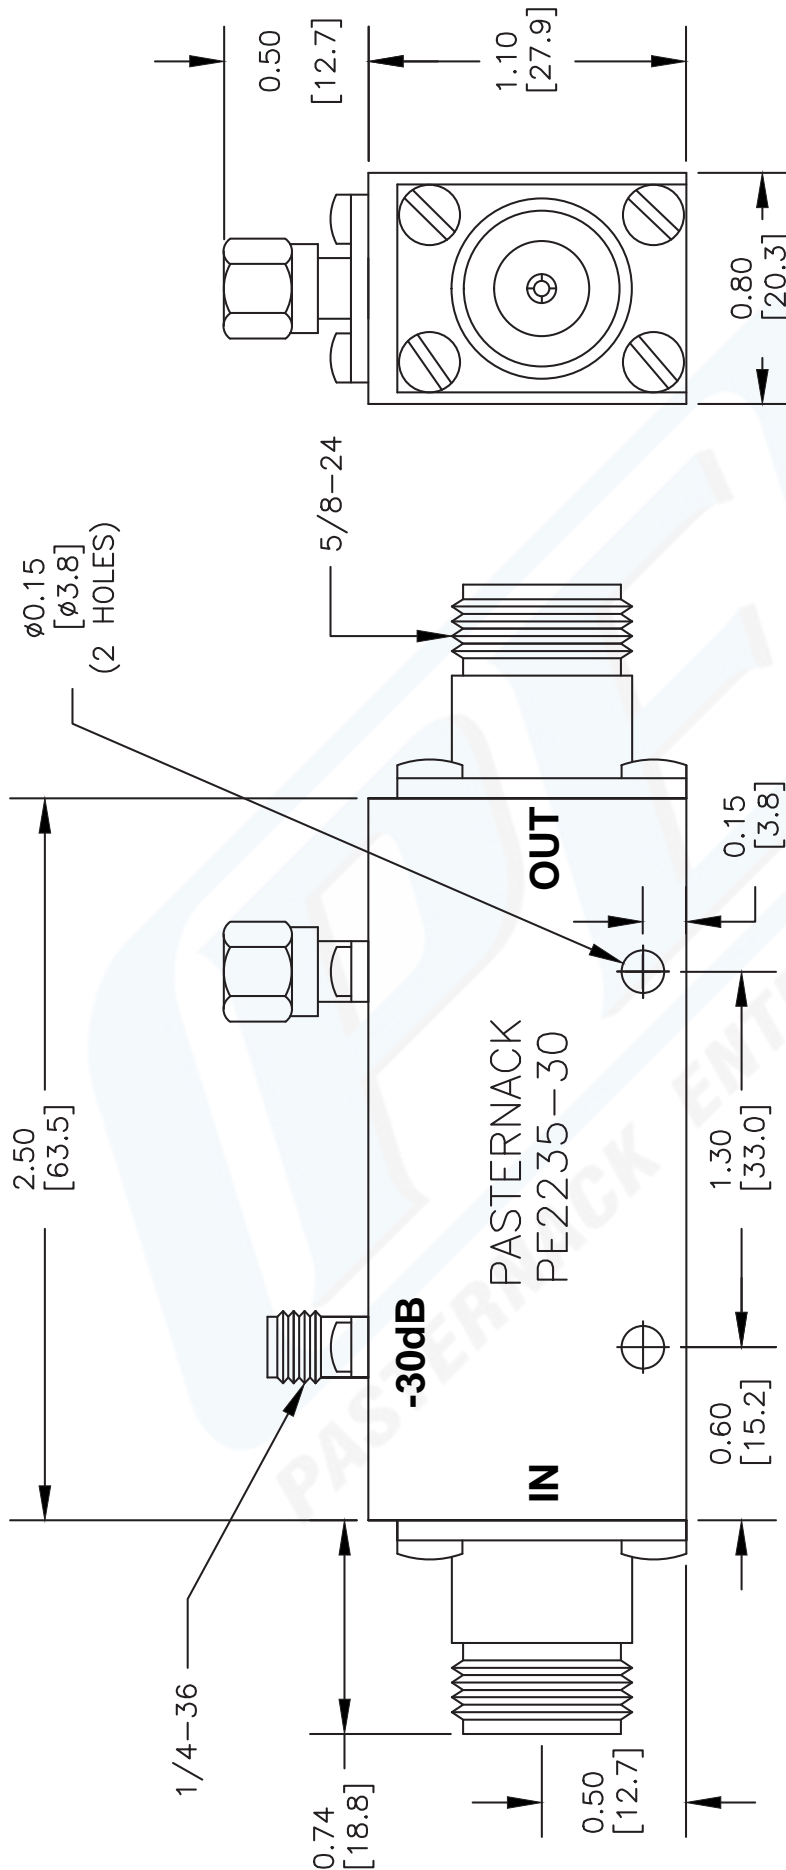

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

**PE2235-30**

FSCM NO. 53919

XXXX

SIZE A

SCALE N/A

CAD FILE 092908-A

**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)