



# Directional 6 dB SMA Coupler From 4 GHz to 12.4 GHz Rated To 50 Watts

## TECHNICAL DATA SHEET

PE2211-6

### Directional 6 dB SMA Coupler From 4 GHz to 12.4 GHz Rated To 50 Watts

#### Configuration

Connector 1	SMA Female
Connector 2	SMA Female
Connector 3	Female
Design	Directional Coupler

#### Electrical Specifications

Frequency Range, GHz	4 to 12.4
Directivity, dB	17
Impedance, Ohms	50
Maximum Insertion Loss, dB	2.2
Maximum Input Power, Watts	50
Maximum Input VSWR	1.3:1
Maximum Secondary Line VSWR	1.3:1
Peak Power, KWatts	3
Coupling Value, dB	6
Coupling Tolerance, dB	± 1
Frequency Sensitivity, dB	0.5

#### Mechanical Specifications

##### Size

Length, in [mm]	1.97 [50.04]
Width, in [mm]	0.38 [9.65]
Height, in [mm]	0.5 [12.7]

##### Connector 1

Type	SMA Female
------	------------

##### Connector 2

Type	SMA Female
------	------------

##### Connector 3

Type	Female
------	--------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 4 GHz to 12.4 GHz Rated To 50 Watts PE2211-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Directional 6 dB SMA Coupler From 4 GHz  
to 12.4 GHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2211-6

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

Directional 6 dB SMA Coupler From 4 GHz to 12.4 GHz Rated To 50 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 6 dB SMA Coupler From 4 GHz to 12.4 GHz Rated To 50 Watts PE2211-6](http://www.pasternack.com/directional-6-db-sma-coupler-4-12.4-ghz-50-watts-pe2211-6-p.aspx)

URL: <http://www.pasternack.com/directional-6-db-sma-coupler-4-12.4-ghz-50-watts-pe2211-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE2211-6 CAD Drawing

Directional 6 dB SMA Coupler From 4 GHz to 12.4 GHz Rated To 50 Watts

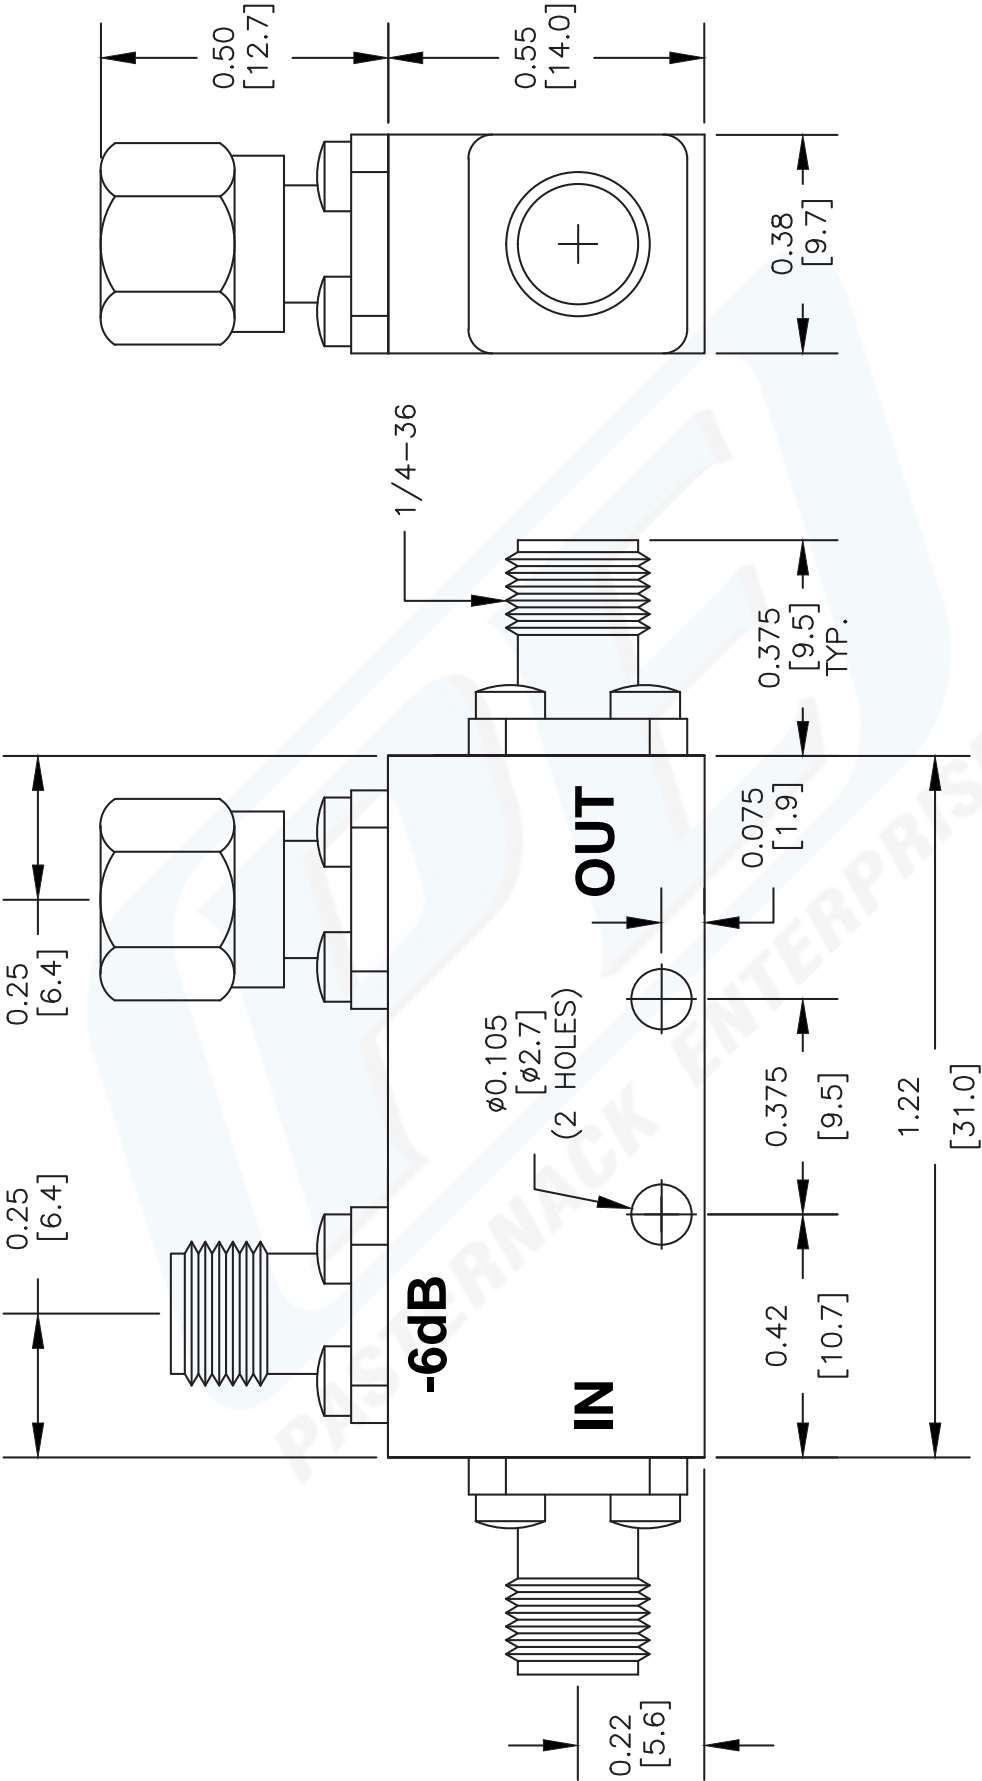

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE2211-6**

FSCM NO. 53919

XXXX

SIZE A

SCALE N/A

CAD FILE 092908