



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7001FE-001

20 - 3000 MHz
22 WATTS
BANDED POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 7001FE-001 is a 22W multi channel broadband system that covers the 20 – 3000 MHz frequency range with a single RF input and Single RF output port.

The system includes RF high power switches controlled by the system controller. The RS232/ Ethernet and/or Front panel key-pad provides full control and reduces the power consumption to the minimum by shutting down the un-selected channel.

The System is configured in a Front panel Connectors configuration.

	Parameter	Specification @ 25° C
Electrical		
1	Frequency Range	20 – 3000 MHz
2	Saturated Power Output	22 Watts typ.
3	Nominal RF drive for rated power	0 dB typ.
4	Small Signal Gain Flatness	+/-2 dB
5	Small Signal Gain	38 dB min.
6	Power Output @ P1dB	10 Watts min @ 20 to 1000 MHz 18 Watts typ. @ 1 to 3 GHz
7	Input VSWR	2:1 max
8	Harmonics	-15 dBc typ. @ 20 to 1000 MHz -20 dBc typ. @ 1 to 3 GHz
9	Spurious Signals	< -60 dBc typical
10	Temperature Protection	Baseplate above 80° C
11	AC Power Consumption (only one channel transmit at the time)	250 Watt @ 20 to 1000 MHz 500 Watts @ 1 to 3 GHz
12	AC Power Input	100-240VAC, 1Ø
13	Maximum RF Input	+5 dBm max
14	Antenna Switching time	50mS max
Mechanical		
15	Dimensions	19" x 24" x 5.25"
16	Weight	50 lb. max
17	Connectors	Type-N
18	Grounding	Chassis
19	Cooling	Internal Forced Air
Environmental		
20	Operating Temperature	0° C to +50° C
21	Operating Humidity	95% Non-condensing
22	Operating Altitude	Up to 10,000' Above Sea Level
23	Shock and Vibration	Normal Truck transport

Specifications subject to change without notice






5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)577-9887
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7001-001

20 - 3000 MHz
22 WATTS
BANDED POWER RF AMPLIFIER

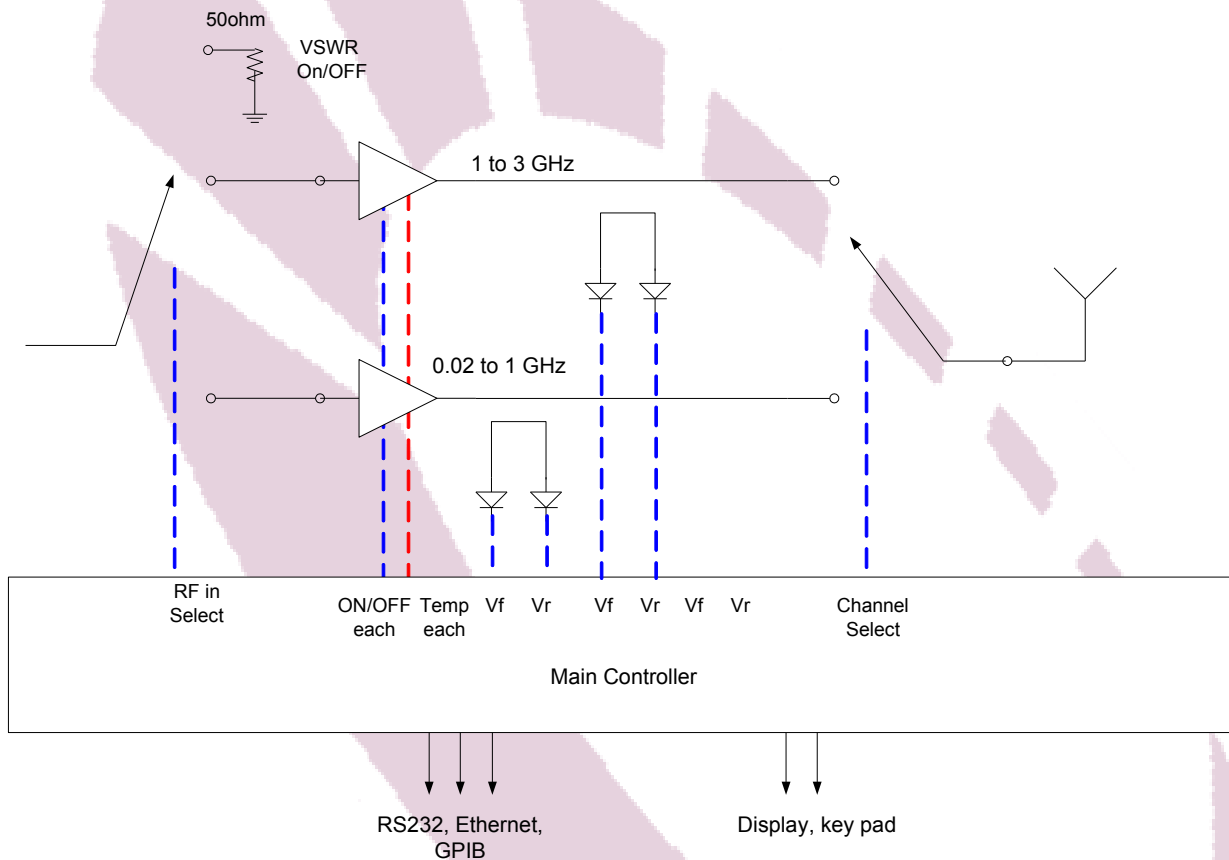

CIRCUIT PROTECTIONS

- ◇ Protection against VSWR of > 3:1 latched with Reset
- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage

CONTROL & INDICATIONS

- ◇ AC Circuit Breaker
- ◇ Band Select
- ◇ Forward power of selected channel
- ◇ Reflected Power of selected channel
- ◇ VSWR Fault Reset

