




## Agilent U1051A

Acqiris TC890 Time-to-Digital Converter  
6 ch, 50 ps resolution



Agilent Technologies

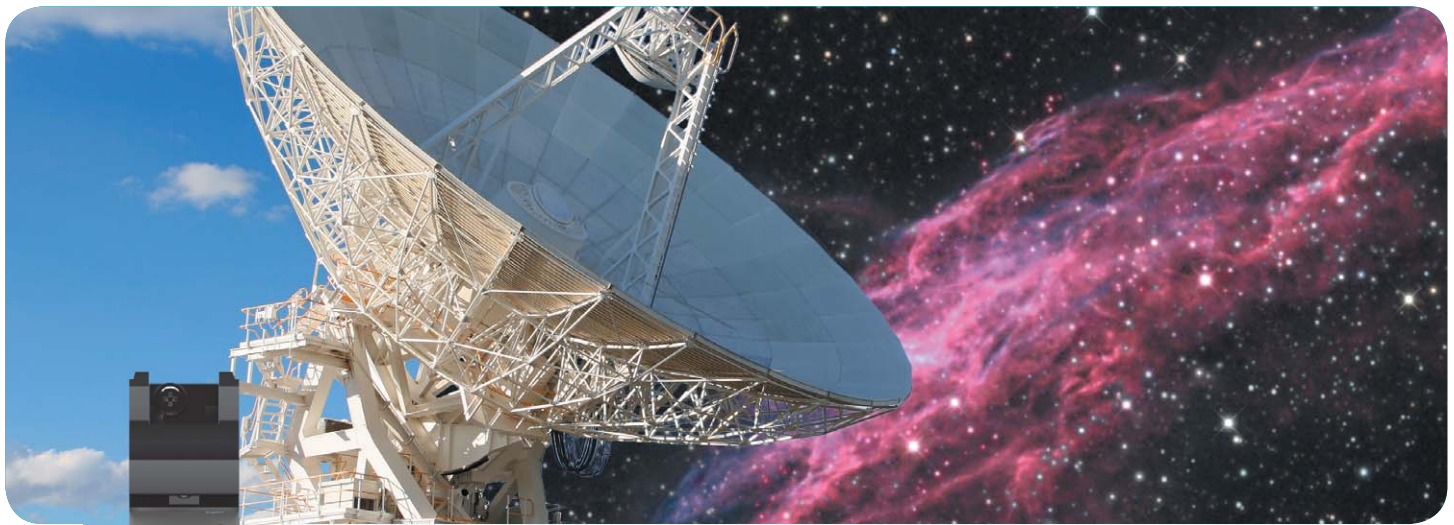

## Main Features

- 6-channel multistop time-to-digital converter (TDC) with multistart acquisition mode
- 50 ps timing resolution
- Ideal for measurement in time-of-flight applications including mass spectrometry and LIDAR and for various pulse-timing measurements
- Large internal memory buffer, with up to 4 million events
- Low jitter ( $< 3$  ps rms) stable ( $\pm 2$  ppm) internal clock source
- External 10 MHz reference input
- FPGA-based data processing unit
- Fast DMA readout mode for increased data throughput
- Data streaming mode allows continuous acquisition and readout
- Built-in self test and status monitoring
- Low power consumption ( $< 25$  W)

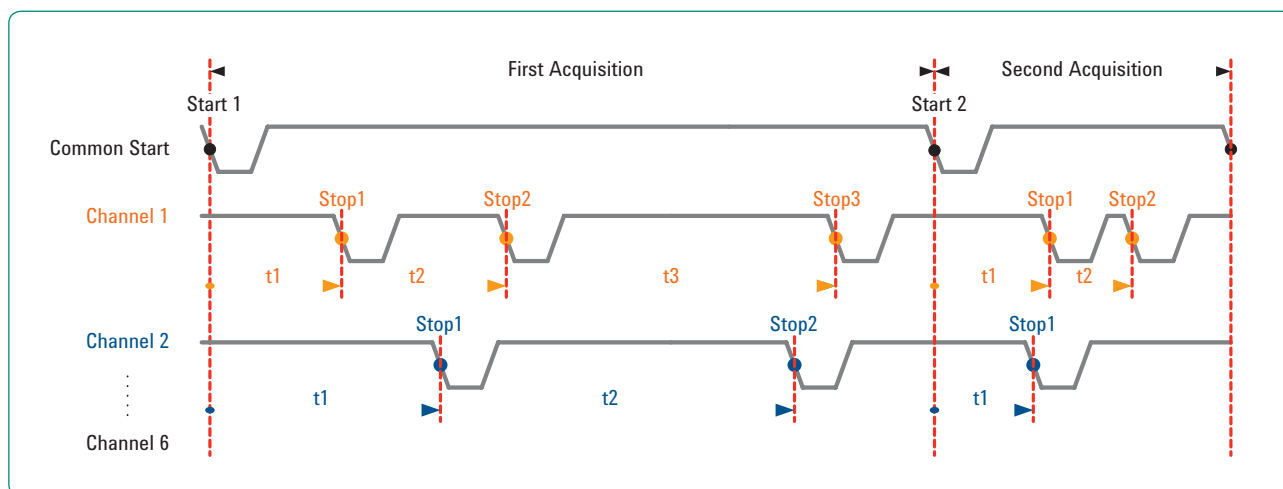


Figure 1. Multiacquisition, 6 channels, common start, multistop

## Exceptional Performance for Precise Timing-Measurement Applications

The Agilent Acqiris U1051A (TC890) features six independent stopwatches for precise timing measurements from a common start event to multiple stop events at a high resolution.

The U1051A is ideal for time measurement applications including LIDAR for 3D mapping and navigation, fluorescence lifetime spectrometry and ion counting in time-of-flight mass spectrometry (TOFMS). Many pulse timing measurements, such as period, frequency and time interval analysis (TIA), also benefit from the new TDC's precise measurement technology.

The U1051A CompactPCI module records multiple events or hits on each of its six input channels, with a timing resolution of 50 ps and a mean dead time between sequential pulses on the same input (double pulse resolution) of less than 15 ns. Running at full speed, the U1051A offers a massive 25 million events-per-second data-throughput rate. The U1051A enables event counting or histogram creation for easy data and spectra comparison.

Six of the seven identical input channels are independent stop inputs and the seventh is the common start. The module operates in a multistart, multistop acquisition mode with the timing information of stop events on all independent channels encoded relative to the most recent start event on the common channel.

In standard mode, the recording range is up to 10 ms. If one channel can be dedicated to a fiducial signal, the 10 ms recording time can be extended to a much wider range. The large internal buffer allows the recording of up to four million stop-events per module.

## On-Board Timing Calculation with Fast Data Readout

The timing information of the start and hit events on all channel inputs is obtained by combining a coarse-grain (5 ns) wide-range (21 bit) real-time counter with a much finer-grained interpolated result coming from the analysis of a ramp signal started by the event.

Each channel consists of a programmable comparator, an XOR gate used to select the active slope, a stable signal generator, and an analog-to-digital converter (ADC). Once digitized, the data are fed to a Xilinx Virtex-2 Pro FPGA-based data processing unit for processing, storage, and readout.

Data readout is achieved with a fast direct memory access (DMA) mode at up to 100 MB/s.

Each channel is processed to determine the time of each detected event, start and stop. The final relative time value is obtained by subtracting the start time from each stop time.

An additional auxiliary input for a common veto signal can be used to enable/disable all start and stop detection, as desired.





## Self Calibration

To achieve the desired precision on all of the input channels, the U1051A time-to-digital converter has a powerful self calibration routine.


This self calibration is done simply through a software command available in the driver, so no extra programming is needed.

## Easy Integration

Agilent Acqiris Time-to-Digital converters are supplied with software drivers for Windows® and application code examples for MATLAB®, C/C++ and LabVIEW.

These code examples provide card set up and basic acquisition functionality, and are easily modified, so that the card can quickly be integrated into a measurement system.

The flexibility of the driver means that, with minimum software adjustments, any Acqiris TDC can be swapped out, replaced, and upgraded over time, with the latest high-resolution Acqiris Time-to-Digital converter.

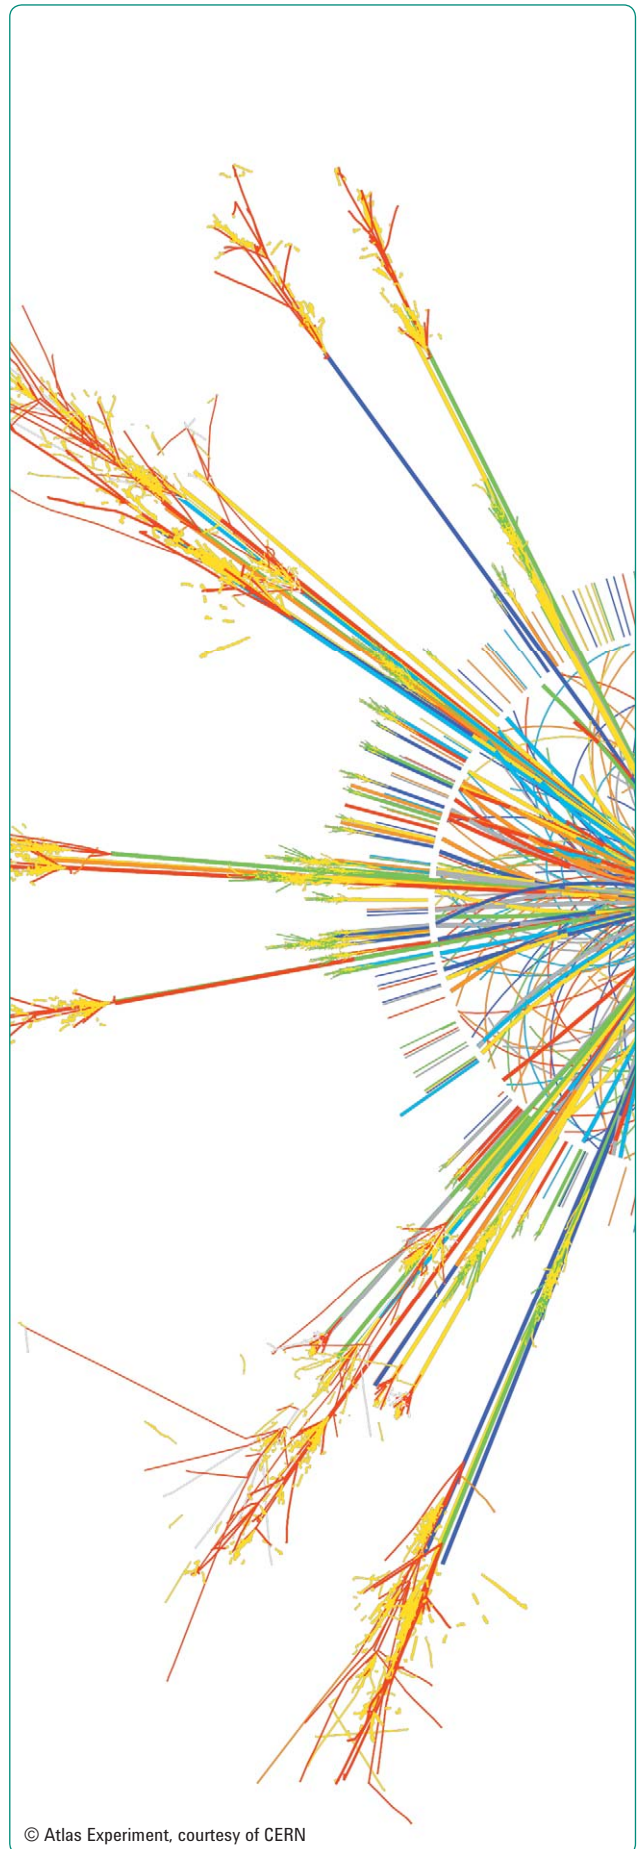

# High-Resolution Multistop Time-to-Digital Converter

Model TC890, 6 channel, 50 ps resolution

## Signal input

### Connectors

50  $\Omega$  K-lock  
Lemo 00.250  
QLA 00  
NIM/CAMAC Standard CD/N549  
50  $\Omega$  K-Lock (LEMO) type

### Impedance

50  $\Omega$   $\pm 1\%$

### Threshold

Programmable from -1.5 V to +1.5 V, in  
0.732 mV steps (12-bit)

### Sensitivity

100 mV over threshold for 350 ps  
(minimum pulse to trigger)  
Hysteresis 15 mV

### Channels

One common start  
Six inputs stop

### Protection

Clamping diodes at  $\pm 2.5$  V, 0.5 W max  
into 50  $\Omega$

### Propagation delay skew

$\Delta t_{pd} = 15$  ps for 10 mV to 100 mV,  
 $\Delta t_{pd} = 40$  ps for 100 mV to 2 V

### VSWR (typ.)

$< 1.5$  from DC to 1 GHz

### VETO IN

50  $\Omega$  input with programmable  
threshold

### REF IN

50  $\Omega$  input for external high-precision  
10 MHz source  
0 to 3 V pkpk  
Threshold at 1.5 V

## Time resolution and range

### Time resolution

50 ps

### Time range

Up to 10.48 ms in standard operation.  
Can be extended to a much wider  
range.

### Double pulse resolution

$< 15$  ns

### Integral nonlinearity

$\pm 50$  ps

### Differential nonlinearity

$\pm 30$  ps

### Post-start dead time

10 ns

### Clock accuracy

Better than  $\pm 2$  ppm

### Clock jitter

$< 3$  ps rms

### Internal reference frequency

10 MHz

## Acquisition and readout

### Acquisition modes

Multistart - Multistop

### DMA

100 MB/s

## General

### Host computer and operating system:

PC compatible (x86) systems running  
Microsoft Windows Vista, Windows XP,  
Windows 2003 Server, Windows 2000  
or National Instruments LabVIEW RT.

For more information on which specific  
processors and operating system ver-  
sions are supported, please contact us.

### Transfer speed:

High-speed PCI bus transfers data at  
sustained rates to host computer:  
Up to 100 Mbytes/s for 32-bit/33 MHz  
operation

### Power consumption (typical)

$< 25$  W

### Current requirements (typical)

12 V 0.10 A  
5 V 4.1 A  
3.3 V 0.80 A  
-12 V 0.05 A

### Warranty

1 year

## Environmental and physical

### Operating temperature

0 ° to 40 °C

### Required airflow

$> 2$  m/s in situ

### Relative humidity

5 to 95% (non-condensing)

### Safety

Complies with EN61010-1

### EMC immunity

Complies with EN61326-1  
Industrial Environment (TBC)


### EMC emissions

Complies with EN61326-1 Class A for  
radiated emissions (TBC)

### Dimensions

6U CompactPCI standard (PXI  
compliant)  
233 mm x 160 mm x 20 mm

Front panel complies with IEEE1101.10

 Certification and Compliance



## Contacts

### Acqiris Product Information

<b>USA</b>	<b>(800) 829-4444</b>
<b>Asia-Pacific</b>	<b>61 3 9210 2890</b>
<b>Europe</b>	<b>41 (22) 884 32 90</b>

### Additional Agilent Contact Information

#### Americas

Canada	(877) 894-4414
Latin America	(305) 269 7500
United States	(800) 829-4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

#### Europe & Middle East

Austria	0820 87 44 11
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	01805 24 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Revised: March 27, 2008

For more information on the Acqiris product line, sales or services, see our website at:

[www.agilent.com/find/acqiris](http://www.agilent.com/find/acqiris)

### Ordering Information

Model	Description
U1051A	Six-channel high-resolution multistart, multistop cPCI time-to-digital converter, Acqiris TC890
U1051A-UK6	Calibration certificate

### Accessories

U1092A-CB7	BNC to Lemo, 1m cable
U1092A-CB8	BNC to Lemo, 2m cable
U1092A-CB9	Lemo to BNC adapter

[www.agilent.com](http://www.agilent.com)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Windows is a U.S. registered trademark of Microsoft Corporation.

© Agilent Technologies, Inc. 2007, 2008

Printed in USA, November 4, 2008

5989-7109EN



**Agilent Technologies**