

Solid State Broadband High Power RF Amplifier

The 5165-002 is a 200 Watt broadband amplifier that covers the 700-3800 MHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3rd order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability.

	Parameter	Specification @ 25° C
Electrical		
1	Frequency Range	700-3800 MHz
2	Saturated Output Power	200 Watts Minimum
4	Small Signal Gain	+55 dB min
5	Power Flatness @ each band	+/- 1.5 dB max with no ALC +/- 1 dB max with internal leveling
6	IP ₃	+60 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical
9	Spurious Signals	> -60 dBc typical
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	3000 Watts max
12	AC Input	180 – 264 VAC, single phase
13	RF Input	+10 dBm max
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	A/AB
Mechanical		
16	Dimensions	19" x 14" x 26"
17	Weight	150 lb. max
18	Connectors	Type-N
19	Grounding	Chassis
20	Cooling	Internal Forced Air
Environmental		
21	Operating Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

CIRCUIT PROTECTIONS


- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage

CIRCUIT CONTROL

- ◇ Standby (amplifier disable)
- ◇ Gain/power setting with 25dB range
- ◇ VSWR protection Reset
- ◇ ALC On/ Off

CIRCUIT INDICATIONS

- ◇ Forward Power
- ◇ Reflected power
- ◇ VSWR Fault
- ◇ Temp Fault
- ◇ Gain Setting (VVA) percentage

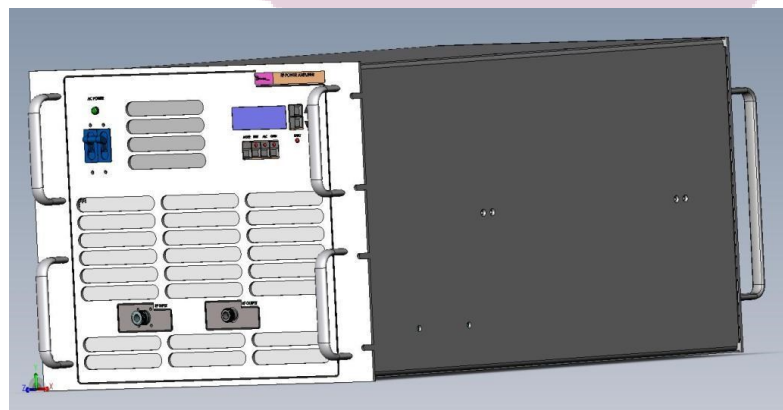

ORDERING MODELS

- ◇ RE - R model with Ethernet, IEEE488 and RS232
- ◇ FE - F model with Ethernet, IEEE488 and RS232

Specifications subject to change without notice

0710

Approved By: _____ Date: _____