
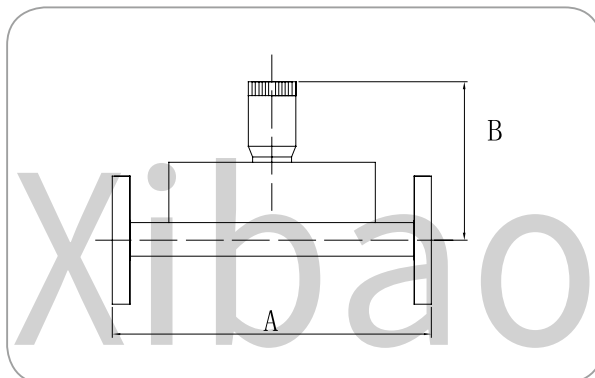


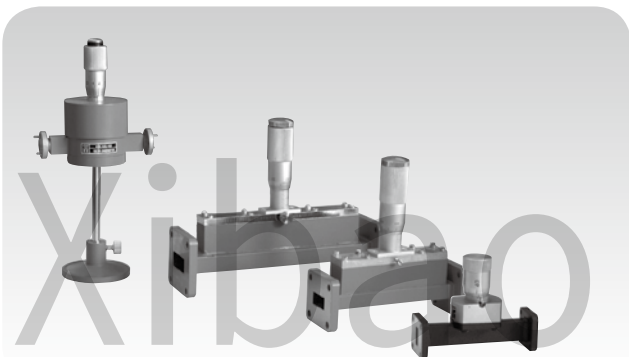

* 型号描述 How to Order

XB-VA-□□□-□□□

衰减量 Attenuation

国际电工波导标准型号 EIA Model No.

可变衰减器 Variable Attenuator

“西宝”缩写 The Abbreviation for Xibao

* 型号及指标 Model & Specifications

型号 Model	频率范围 Freq (GHz)	法兰 Flange	可调节范围 Attenuation	驻波 VSWR
XB-VA430-□□	1.72~2.61	FDP/FDM	>30dB	≤1.20
XB-VA340-□□	2.17~3.30	FDP/FDM	>30dB	≤1.20
XB-VA284-□□	2.60~3.95	FDP/FDM	>30dB	≤1.20
XB-VA229-□□	3.22~4.90	FDP/FDM	>30dB	≤1.20
XB-VA187-□□	3.94~5.99	FDP/FDM	>30dB	≤1.20
XB-VA159-□□	4.64~7.05	FDP/FDM	>30dB	≤1.20
XB-VA137-□□	5.38~8.17	FDP/FDM	>35dB	≤1.20
XB-VA112-□□	6.57~9.99	FBP/FBM/FBE	>35dB	≤1.20
XB-VA90-□□	8.20~12.40	FBP/FBM/FBE	>35dB	≤1.20
XB-VA75-□□	9.84~15.0	FBP/FBM/FBE	>35dB	≤1.20
XB-VA62-□□	11.9~18.0	FBP/FBM/FBE	>35dB	≤1.20
XB-VA51-□□	14.5~22.0	FBP/FBM/FBE	>35dB	≤1.20
XB-VA42-□□	18.0~26.5	FBP/FBM/FBE	>35dB	≤1.20
XB-VA34-□□	21.7~33.0	FBP/FBM/FBE	>35dB	≤1.20
XB-VA28-□□	26.5~40.0	FBP/FBM/FBE	>35dB	≤1.20
XB-VA22-□□	33.0~50.0	UG383/U	>35dB	≤1.25
XB-VA19-□□	39.2~59.6	UG383/U-Mod	>35dB	≤1.25
XB-VA15-□□	50.0~75.0	UG-385/U-Mod	>35dB	≤1.25
XB-VA12-□□	60.5~91.9	UG-387/U-Mod	>35dB	≤1.25
XB-VA10-□□	75.0~110	UG-387/U-Mod	>35dB	≤1.25

※ 以上只是常规产品，其它品种的频率覆盖范围可从 1.45~110GHz，波导型号可从 WR510 (BJ18) ~WR10 (BJ900)

※ Other Products: F=1.45~110GHz, Waveguide WR510 (BJ18)~WR10 (BJ900)