



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Filters and Products



160 MHz Bandpass Filter

Part Number: AE160B9995

Specifications:

Center Frequency: 160 MHz

Insertion Loss: <3 dB

Passband 135-185 MHz <1dB flat


Return Loss Passband >15dB

Rejection: >30dB @ 0-80 MHz

>50dB @ 240-2000 MHz

Size: 1.5 x 0.5 x 0.4 inches

Outline Drawing:

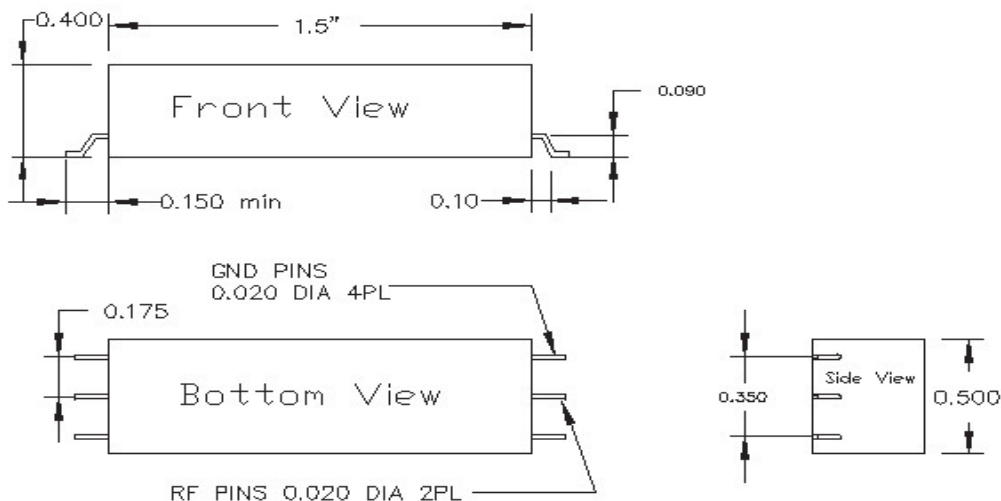

Rev. Date	Anatech Electronics Inc		
	Outline Drawing		
	OKDR2	986581	
0.15 77/00			

ANATECH ELECTRONICS INC. 70 Outwater Lane, Garfield, NJ 07026 Tel: (973) 772-4242 Fax: (973) 772-4646

E-Mail: sales@anatechelectronics.com Website: www.anatechelectronics.com

160 MHz Bandpass Filter

Part Number: AE160B9995

Response Plot:

