

X5 Frequency Multiplier

50Ω Output 750 to 1100 MHz

RMK-5-13+

The Big Deal

- Broadband, 750 to 1100 MHz output
- Good harmonic suppression:
F4, 63 dBc; F6, 68 dBc
- Small size, 0.25 x 0.31 x 0.16"



CASE STYLE: TT1224

Product Overview

Mini-Circuits' RMK-5-13+ frequency multiplier provides a multiplication factor of 5, converting input frequencies from 150 to 200 MHz into output frequencies from 750 to 1100 MHz, supporting applications including synthesizers, local oscillators, satellite up and down converters and more. The unit supports signal input power of +17 dBm with 21.2 dB conversion loss and very good harmonic suppression. The multiplier comes housed in a miniature surface-mount package (0.25 x 0.31 x 0.16") ideal for dense circuit board layouts.

Feature	Advantages
Low conversion loss, 21.2 dB	With a low conversion loss, the unit produces higher output power, reducing the need for amplification.
Very good harmonic suppression • F4, 63 dBc • F6, 68 dBc	Reduces spurious signals and the need for additional filtering.
Low cost	Provides an easy, cost-effective solution for generating high-frequency signals from a lower frequency signal source.
Small size	Measuring only 0.25 x 0.31 x 0.16", the RMK-5-13+ saves space in crowded PCB layouts.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



X5 Frequency Multiplier

50Ω Output 750 to 1100 MHz

RMK-5-13+



CASE STYLE: TT1224
PRICE: \$19.95 ea. QTY (10-49)

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	21 dBm
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

Features

- low conversion loss, 21.2 dB typ.
- excellent adjacent harmonic rejection, F4, 63 dBc typ., F6, 68 dBc typ
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters

+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Unit
Multiplier Factor		5		
Frequency Range, Input (F1)	150		200	MHz
Frequency Range, Output (F5)	750		1100	MHz
Input Power	—	17.0	—	dBm
Conversion Loss	—	21.2	24.5	dB
Harmonic Output*	F1	-3	2.0	—
	F2	40	65	—
	F3	-10	5	—
	F4	40	63	—
	F6	40	68	—
	F7	-1	4.0	—

* Harmonics of input frequency below the power level of F5

Outline Drawing

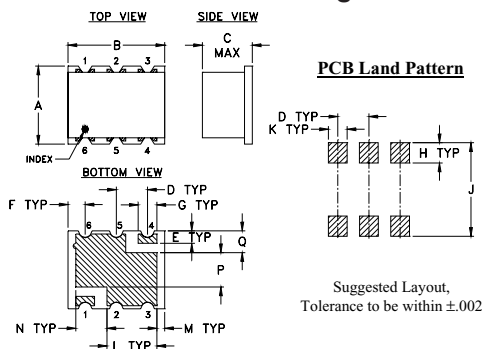


PCB Land Pattern

Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

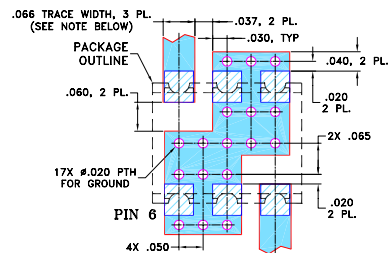

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes








- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M136843
ED-14730
RMK-5-13+
AV/CP/AM
140909
Page 2 of 3

RMK-5-13+

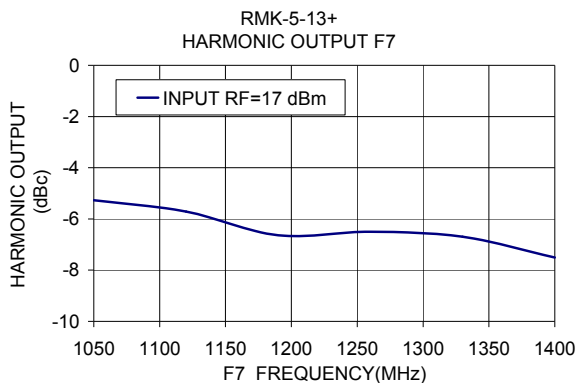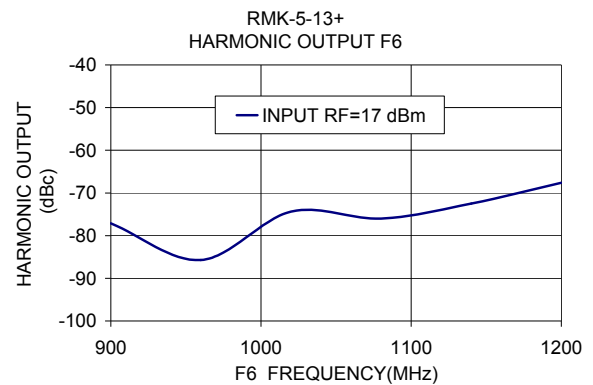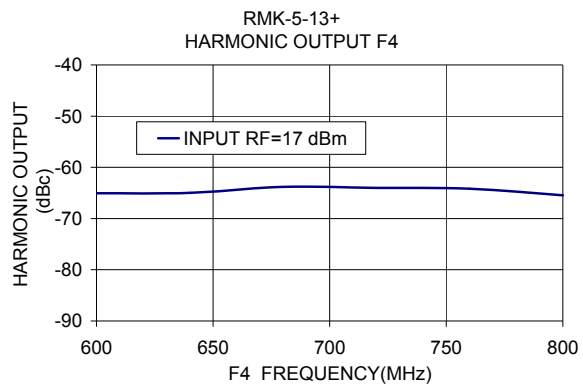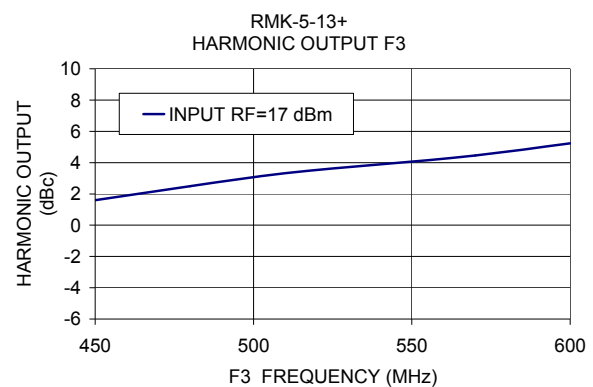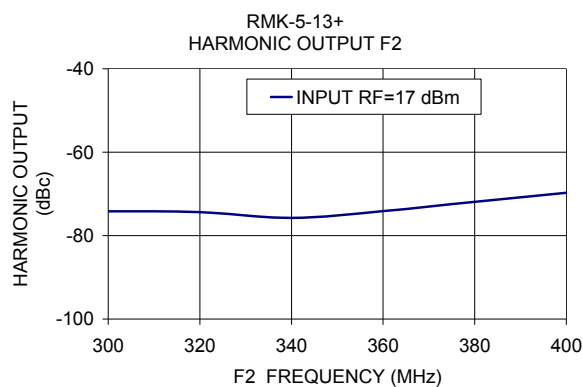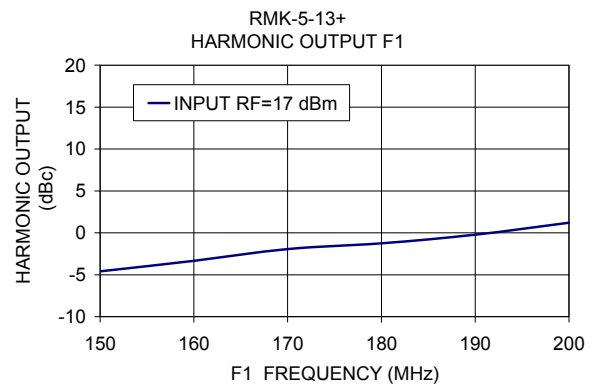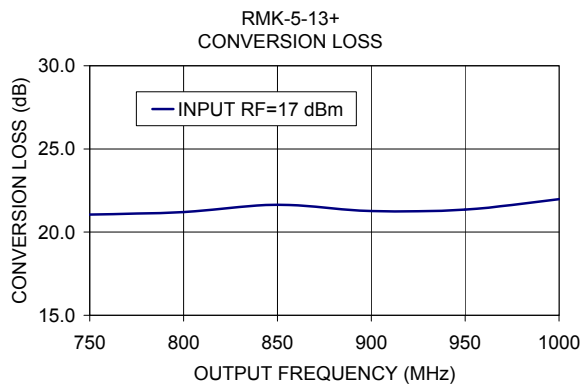

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

